





Features	
▪	Microminiature relay
	Dimensions: 20.4×7.0×15.4(mm)
▪	Slim type, 7mm width
	High mounting density
▪	High sensitivity 200mW
Safety Approval	
	NO.40024200
	US NO.E164730
	NO.CQC09002030809



ORDERING INFORMATION

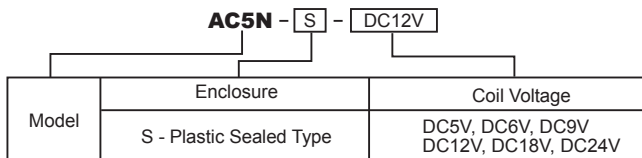

Remarks: 1.Available in 1 Form A only 2. Coil Power: 200mW

SPECIFICATION

CONTACT DATA

Contact Form	1 Form A	
Contact Material	Ag Alloy	
Contact Rating	5A 250VAC	
Contact Resistance	Max. 100mΩ (24VDC 1A)	
Load	Max. Switching Voltage	250VAC/30VDC
	Max. Switching Current	5A
	Max. Switching Power	1250VA, 150W
	Min. Switching Load	5VDC, 100mA
Life	Electrical	100,000 operations
	Mechanical	10,000,000 operations

COIL DATA

Nominal Coil Power	200mW
--------------------	-------

GENERAL DATA

Insulation Resistance	Min. 1000MΩ 500VDC	
Dielectric Strength	Between open contacts	750VAC, 1min
	Between coil and contacts	4,000VAC, 1min
Operate Time	Max. 10ms	
Release Time	Max. 10ms	
Operating Temperature	-40°C to +85°C	
Humidity	5~85%RH, +40°C	
Shock Resistance	Endurance	1,000m/s ²
	Misoperation	100m/s ²
Vibration Resistance	Endurance	10~55Hz, 1.5mm double amplitude
	Misoperation	10~55Hz, 1.5mm double amplitude
Weight	Approximately 3.0g	

Note:Data shown are of initial value

SAFETY APPROVAL

File Number	Contact Form	Power Consumption	Coil Voltage	Contact Rating	Remarks
UL E164730	A	0.2W	3 - 24VDC	5A 250VAC	Ambient Temperature: 95°C
VDE 40024200	A	0.2W	3 - 24VDC	5A 250VAC	Ambient Temperature: 85°C
CQC 09002030809 (GB/T 21711.1-2008)	A	0.2W	3 - 24VDC	5A 250VAC	Ambient Temperature: 85°C

Specifications subject to change without notice

ISO9001、ISO/TS16949、ISO14001 Approved

COIL DATA


Ambient Temperature: 23°C

Model	Nominal Voltage VDC	Coil Resistance Ω +/-10%	Operate Voltage \leq VDC	Release Voltage \geq VDC	Coil Power mW
AC5N-S-DC5V	5	125	3.75	0.5	200
AC5N-S-DC6V	6	180	4.5	0.6	
AC5N-S-DC9V	9	405	6.75	0.9	
AC5N-S-DC12V	12	720	9.0	1.2	
AC5N-S-DC18V	18	1620	13.5	1.8	
AC5N-S-DC24V	24	2880	18.0	2.4	


OUTLINE, WIRING DIAGRAM, MOUNTING HOLE LAYOUT (UNIT: mm)

AC5N



Outline



Mounting Hole Layout
(Bottom View)



Wiring Diagram
(Bottom View)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Zhejiang](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)