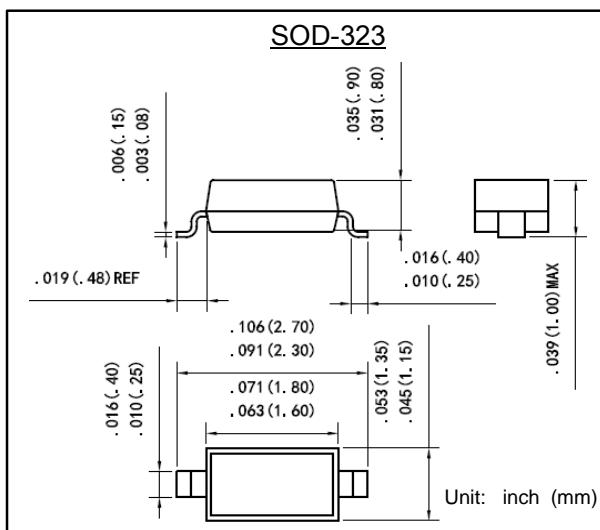


表面安装肖特基二极管
反向电压 40 V
正向电流 0.1 A

Surface Mounted Schottky Barrier Rectifiers
Reverse Voltage 40 V
Forward Current 0.1 A



特征 Features

- 反向漏电流低 Low reverse leakage
 - 正向浪涌承受能力强 High forward surge capability
 - 高信赖性 High reliability
 - 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒
260°C/10seconds
 - 引线和管体皆符合RoHS标准 Lead and body according with RoHS standard
 - 型号后缀“F”标记无卤素产品 Green compound with suffix "-F" on Marking
- 机械数据 Mechanical Data**
- 封装外形:SOD-323塑封 Case:SOD-323 Molded plastic
 - 环氧树脂 : UL易燃等级 : 94V-0
Epoxy: UL 94V-0 rate flame retardant
 - 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

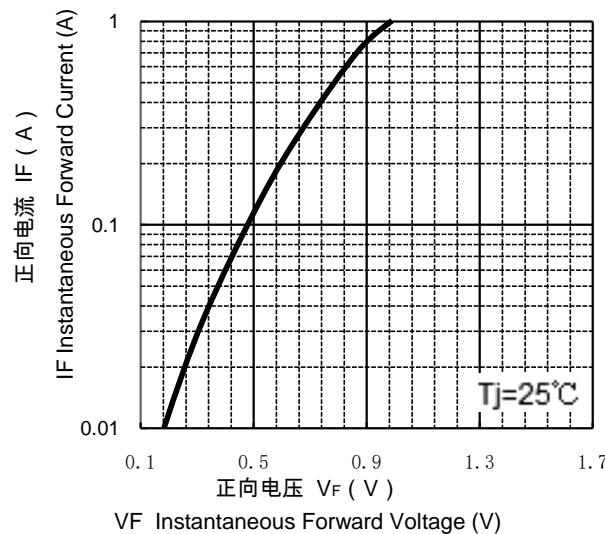
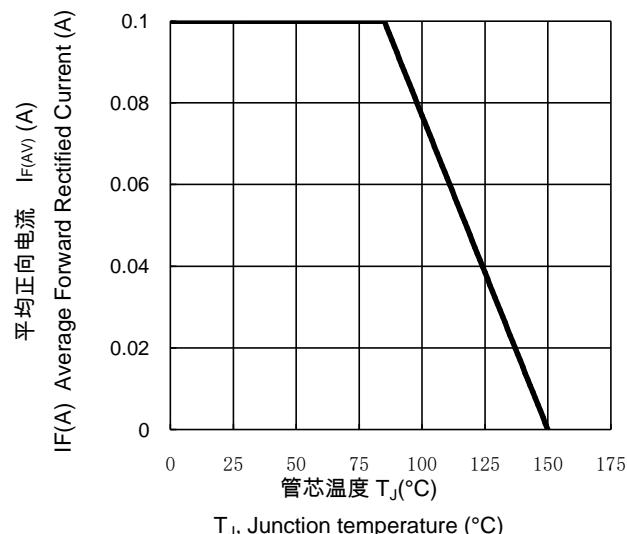
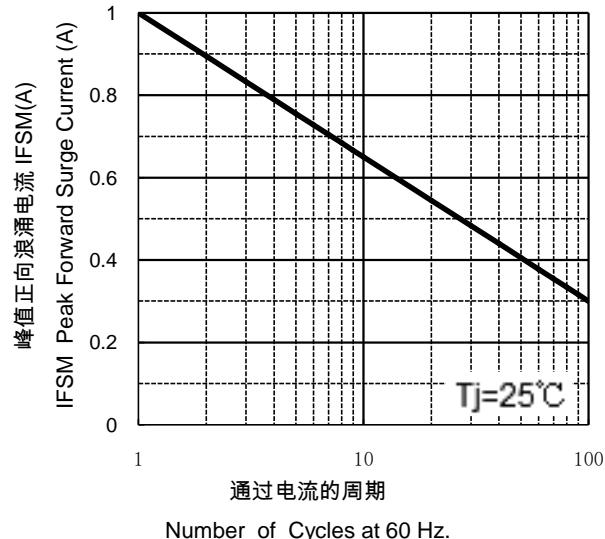
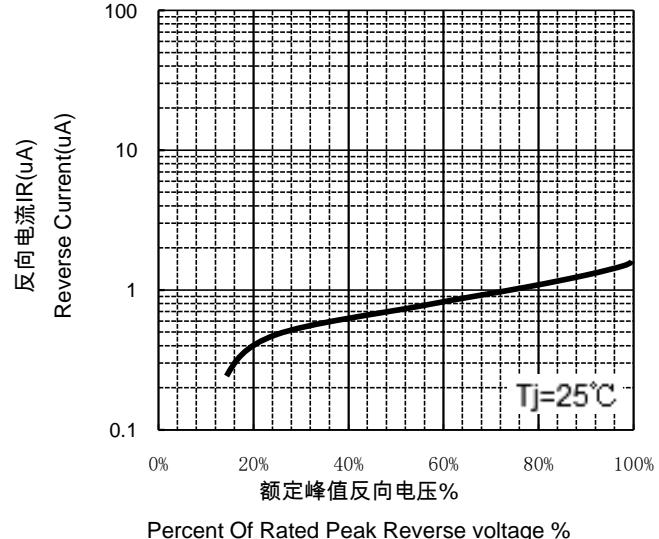
Ratings at 25°C ambient temperature unless otherwise specified.

| 参数 Parameter | 符号 Symbols | RB501V-40 | 单位 Unit |
|--|--------------------------------------|---------------|------------|
| Marking 印字 | / | 4 | / |
| 最大可重复峰值反向电压 Maximum repetitive peak reverse voltage | V _{RRM} | 40 | V |
| 最大均方根电压 Maximum RMS voltage | V _{RMS} | 28 | V |
| 最大直流阻断电压 Maximum DC blocking voltage | V _{DC} | 40 | V |
| 最大正向平均整流电流 Maximum average forward rectified current | I _{F(AV)} | 0.1 | A |
| 正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave | I _{FSM} | 1 | A |
| 最大正向电压 @ IF=0.1A Maximum forward voltage | V _F | 0.550 | V |
| 最大反向电流 @ V _{DC} TA= 25°C Maximum reverse current TA= 100°C | I _R | 30.0 10000 | uA |
| 典型热阻 Typical thermal resistance (Note 1) | R _{θJA} R _{θJL} | 400 150 | °C/W |
| 典型结电容 VR=4.0V,f=1MHz Type junction capacitance | C _J | 6 | pF |
| 工作结温 Operating junction | T _J | -55 --- +150 | °C |
| 存储温度 Storage temperature rang | T _{STG} | -55 --- +150 | °C |

备注 Note:

1) 安装在PCB板上，从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient , PCB mounted.

特性曲线 Characteristic Curves
正向特性曲线 (典型值)
TYPICAL FORWARD CHARACTERISTIC

正向电流降额曲线
FORWARD CURRENT DERATING CURVE

浪涌特性曲线 (最大值)
MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

反向特性曲线
Typical Reverse Characteristics




RB501V-40

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by ZHIDE manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)
[ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#)
[10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)