



表面安装普通整流二极管

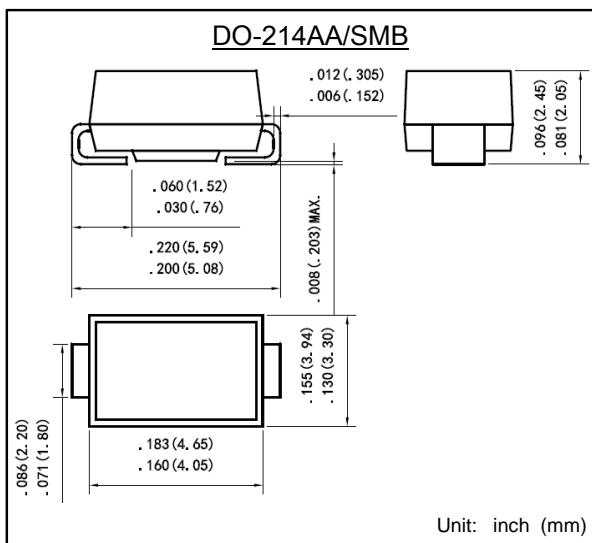
反向电压 50 ~ 1000 V

正向电流 3.0 A

Surface Mount General-purpose Rectifiers

Reverse Voltage 50 ~ 1000 V

Forward Current 3.0 A

**特征 Features**

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒  
260°C/10seconds
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

**机械数据 Mechanical Data**

- 封装外形:DO-214AA 塑封 Case:DO-214AA Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

**最大值和特性 TA = 25°C 除非另有规定。****Maximum Ratings & Characteristics**

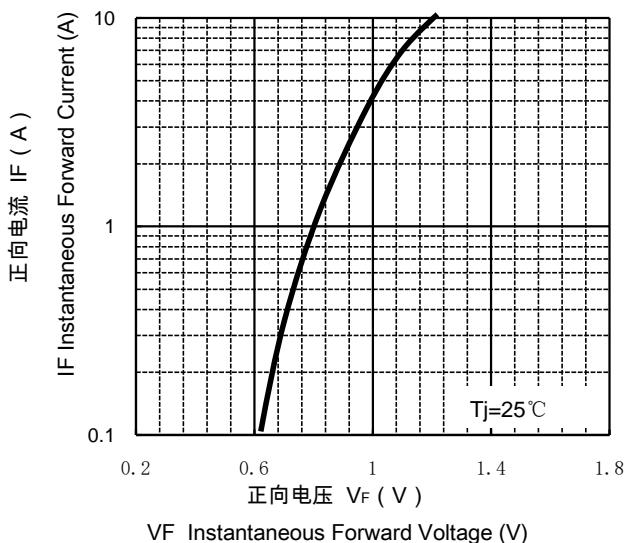
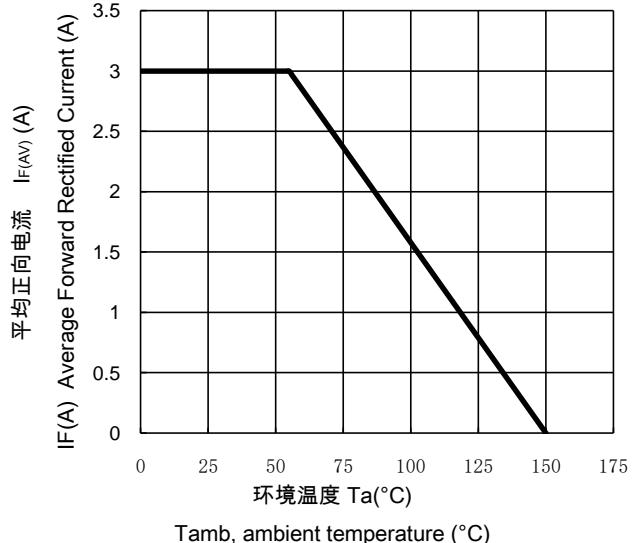
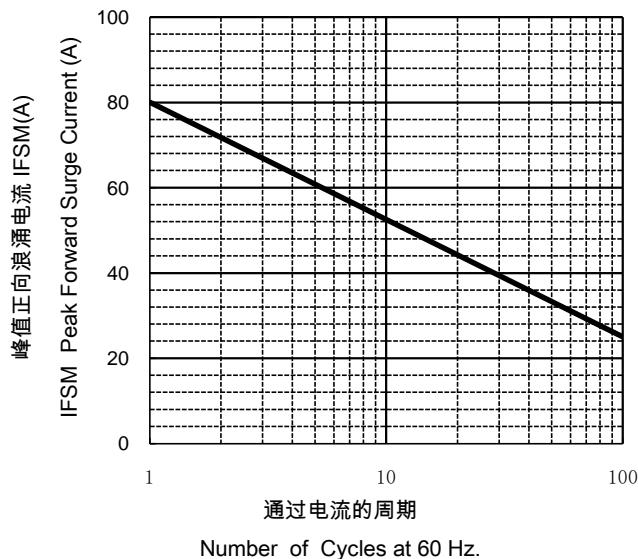
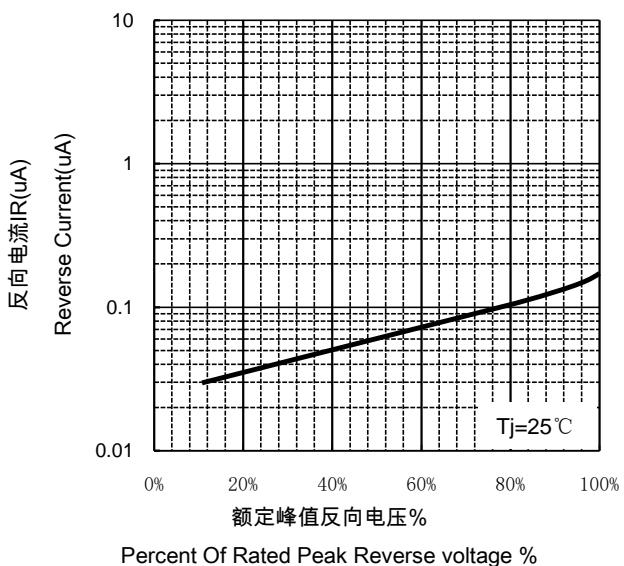
Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	S3AB	S3BB	S3DB	S3GB	S3JB	S3KB	S3MB	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
最大正向平均整流电流 Maximum average forward rectified current	I <sub>F(AV)</sub>								A
正向不重复浪涌电流 8.3 ms 单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I <sub>FSM</sub>								A
最大正向电压 @IF=3.0A Maximum forward voltage	V <sub>F</sub>								V
最大反向电流 @V <sub>DC</sub> TA= 25°C Maximum reverse current TA= 125°C	I <sub>R</sub>				5				μA
					100				
典型热阻 Typical thermal resistance (Note 1)	R <sub>θJA</sub>				55				°C/W
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	C <sub>J</sub>				90				pF
工作结温和存储温度 Operating junction and storage temperature rang	T <sub>J</sub> , T <sub>STG</sub>				-55 --- +150				°C

备注 Note:

1) 安装在PCB板上，从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient, PCB mounted.

**特性曲线 Characteristic Curves**
**正向特性曲线 ( 典型值 )**
**TYPICAL FORWARD CHARACTERISTIC**

**正向电流降额曲线**
**FORWARD CURRENT DERATING CURVE**

**浪涌特性曲线 ( 最大值 )**
**MAXIMUM NON REPETITIVE**
**PEAK FORWARD SURGE CURRENT**

**反向特性曲线**
**Typical Reverse Characteristics**


# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Diodes - General Purpose, Power, Switching category:***

***Click to view products by ZHIDE manufacturer:***

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [HSC285TRF-E](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)  
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)  
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#)  
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)  
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)  
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)