

## SOD123FL



### Features

- Glass passivated chip
- Built-in strain relief
- Low inductance
- High peak reverse power dissipation
- Low reverse leakage
- For use in stabilizing and clipping with high power rating
- RoHS compliant

### Mechanical Data

- Case: SOD123FL Molded plastic
- Lead: Solderable per MIL-STD-750, method 2026
- Epoxy: UL 94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Mounting position: Any

Parameter	Symbols	Value	Unit
DC Power dissipation at TL = 75 °C <sup>(1)</sup>	$P_D$	1.0	W
Maximum forward voltage at $I_F=200\text{mA}$	$V_F$	1.2	V
Junction temperature range	$T_J, T_{STG}$	-55 to +150	°C
Storage temperature range	$T_J, T_{STG}$	-55 to +150	°C

Note :

( 1 )  $T_L$ =Lead temperature at 3/8" (9.5mm)from body

Ratings and Characteristics Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)



Fig. 1 - Power Temperature Derating Curve



Fig. 2 - Temperature Coefficients v.s. Zener Voltage

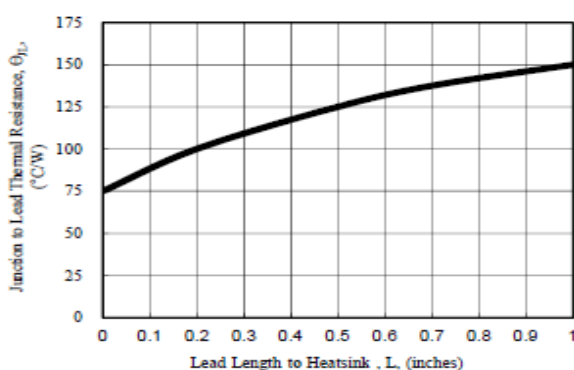


Fig. 3 - Typical Thermal Resistance v.s. Lead Length



Fig. 4 - Maximum Surge Power

Part Number	Device Marking Code	Nominal Zener Voltage @I <sub>T</sub>			I <sub>ZT</sub> (mA)	Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		V <sub>Z AVE.</sub> (V)	V <sub>Z MIN.</sub> (V)	V <sub>Z MAX.</sub> (V)		Z <sub>ZT MAX.</sub> (Ω) @I <sub>ZT</sub>	Z <sub>ZK MAX.</sub> (Ω) @I <sub>ZK</sub>	I <sub>ZK</sub> (mA)	I <sub>R</sub> (uA)@V <sub>R</sub>	V <sub>R</sub> (V)	
SMF4727A	27A	3.0	2.85	3.15	80.0	15	400	1.00	100.0	1.0	301.0
SMF4728A	28A	3.3	3.14	3.47	76.0	10	400	1.00	100.0	1.0	274.0
SMF4729A	29A	3.6	3.42	3.78	69.0	10	400	1.00	100.0	1.0	251.0
SMF4730A	30A	3.9	3.71	4.10	64.0	9	400	1.00	50.0	1.0	232.0
SMF4731A	31A	4.3	4.09	4.52	58.0	9	400	1.00	10.0	1.0	210.0
SMF4732A	32A	4.7	4.47	4.94	53.0	8	500	1.00	10.0	1.0	192.0
SMF4733A	33A	5.1	4.85	5.36	49.0	7	550	1.00	10.0	1.0	177.0
SMF4734A	34A	5.6	5.32	5.88	45.0	5	600	1.00	10.0	2.0	161.0
SMF4735A	35A	6.2	5.89	6.51	41.0	2	700	1.00	10.0	3.0	146.0
SMF4736A	36A	6.8	6.46	7.14	37.0	4	700	1.00	10.0	4.0	133.0
SMF4737A	37A	7.5	7.13	7.88	34.0	4	700	0.50	10.0	5.0	121.0
SMF4738A	38A	8.2	7.79	8.61	31.0	5	700	0.50	10.0	6.0	110.0
SMF4739A	39A	9.1	8.65	9.56	28.0	5	700	0.50	10.0	7.0	100.0
SMF4740A	40A	10.0	9.50	10.50	25.0	7	700	0.25	10.0	7.6	91.0
SMF4741A	41A	11.0	10.45	11.55	23.0	8	700	0.25	0.5	8.4	83.0
SMF4742A	42A	12.0	11.40	12.60	21.0	9	700	0.25	0.5	9.1	76.0
SMF4743A	43A	13.0	12.35	13.65	19.0	10	700	0.25	0.5	9.9	69.0
SMF4744A	44A	15.0	14.25	15.75	17.0	14	700	0.25	0.5	11.4	61.0
SMF4745A	45A	16.0	15.20	16.80	15.5	16	700	0.25	0.5	12.2	57.0
SMF4746A	46A	18.0	17.10	18.90	14.0	20	750	0.25	0.5	13.7	50.0
SMF4747A	47A	20.0	19.00	21.00	12.5	22	750	0.25	0.5	15.2	45.0
SMF4748A	48A	22.0	20.90	23.10	11.5	23	750	0.25	0.5	16.7	41.0
SMF4749A	49A	24.0	22.80	25.20	10.5	25	750	0.25	0.5	18.2	38.0
SMF4750A	50A	27.0	25.65	28.35	9.5	35	750	0.25	0.5	20.6	34.0
SMF4751A	51A	30.0	28.50	31.50	8.5	40	1000	0.25	0.5	22.8	30.0
SMF4752A	52A	33.0	31.35	34.65	7.5	45	1000	0.25	0.5	25.1	27.0
SMF4753A	53A	36.0	34.20	37.80	7.0	50	1000	0.25	0.5	27.4	25.0
SMF4754A	54A	39.0	37.05	40.95	6.5	60	1000	0.25	0.5	29.7	23.0
SMF4755A	55A	43.0	40.85	45.15	6.0	70	1500	0.25	0.5	32.7	22.0
SMF4756A	56A	47.0	44.65	49.35	5.5	80	1500	0.25	0.5	35.8	19.0
SMF4757A	57A	51.0	48.45	53.55	5.0	95	1500	0.25	0.5	38.8	18.0
SMF4758A	58A	56.0	53.20	58.80	4.5	110	2000	0.25	0.5	42.6	16.0
SMF4759A	59A	62.0	58.90	65.10	4.0	125	2000	0.25	0.5	47.1	14.0
SMF4760A	60A	68.0	64.60	71.40	3.7	150	2000	0.25	0.5	51.7	13.0
SMF4761A	61A	75.0	71.25	78.75	3.3	175	2000	0.25	0.5	56.0	12.0
SMF4762A	62A	82.0	77.90	86.10	3.0	200	3000	0.25	0.5	62.2	11.0
SMF4763A	63A	91.0	86.45	95.55	2.8	250	3000	0.25	0.5	69.2	10.0
SMF4764A	64A	100.0	95.00	105.00	2.5	350	3000	0.25	0.5	76.0	9.0
SZF1110A	11Z	110.0	104.50	115.50	2.3	450	4000	0.25	0.5	83.6	8.6
SZF1120A	12Z	120.0	114.00	126.00	2.0	550	4500	0.25	0.5	91.2	7.8
SZF1130A	13Z	130.0	123.50	136.50	1.9	700.0	5000	0.25	0.5	98.8	7.0
SZF1150A	15Z	150.0	142.50	157.50	1.7	1000	6000	0.25	0.5	114.0	6.4
SZF1160A	16Z	160.0	152.00	168.00	1.6	1100	6500	0.25	0.5	121.6	5.8
SZF1180A	18Z	180.0	171.00	189.00	1.4	1200	7000	0.25	0.5	136.8	5.2
SZF1200A	20Z	200.0	190.00	210.00	1.2	1900	9990	0.25	0.5	152.0	4.7
SZF1210A	21Z	210.0	199.50	220.50	1.0	2000	9990	0.25	0.5	160.0	4.0
SZF1220A	22Z	220.0	209.00	231.00	1.0	2000	9990	0.25	0.5	168.0	4.0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zener Diodes](#) category:*

*Click to view products by [ZHIDE](#) manufacturer:*

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#)  
[1N747A](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [JANTX1N5907](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#)  
[1N4745ARL](#) [1N4752ARL](#) [1N4760ARL](#) [1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#)  
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#) [MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#)  
[3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4732A-T3](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD39S-T1-A](#)