


RoHS

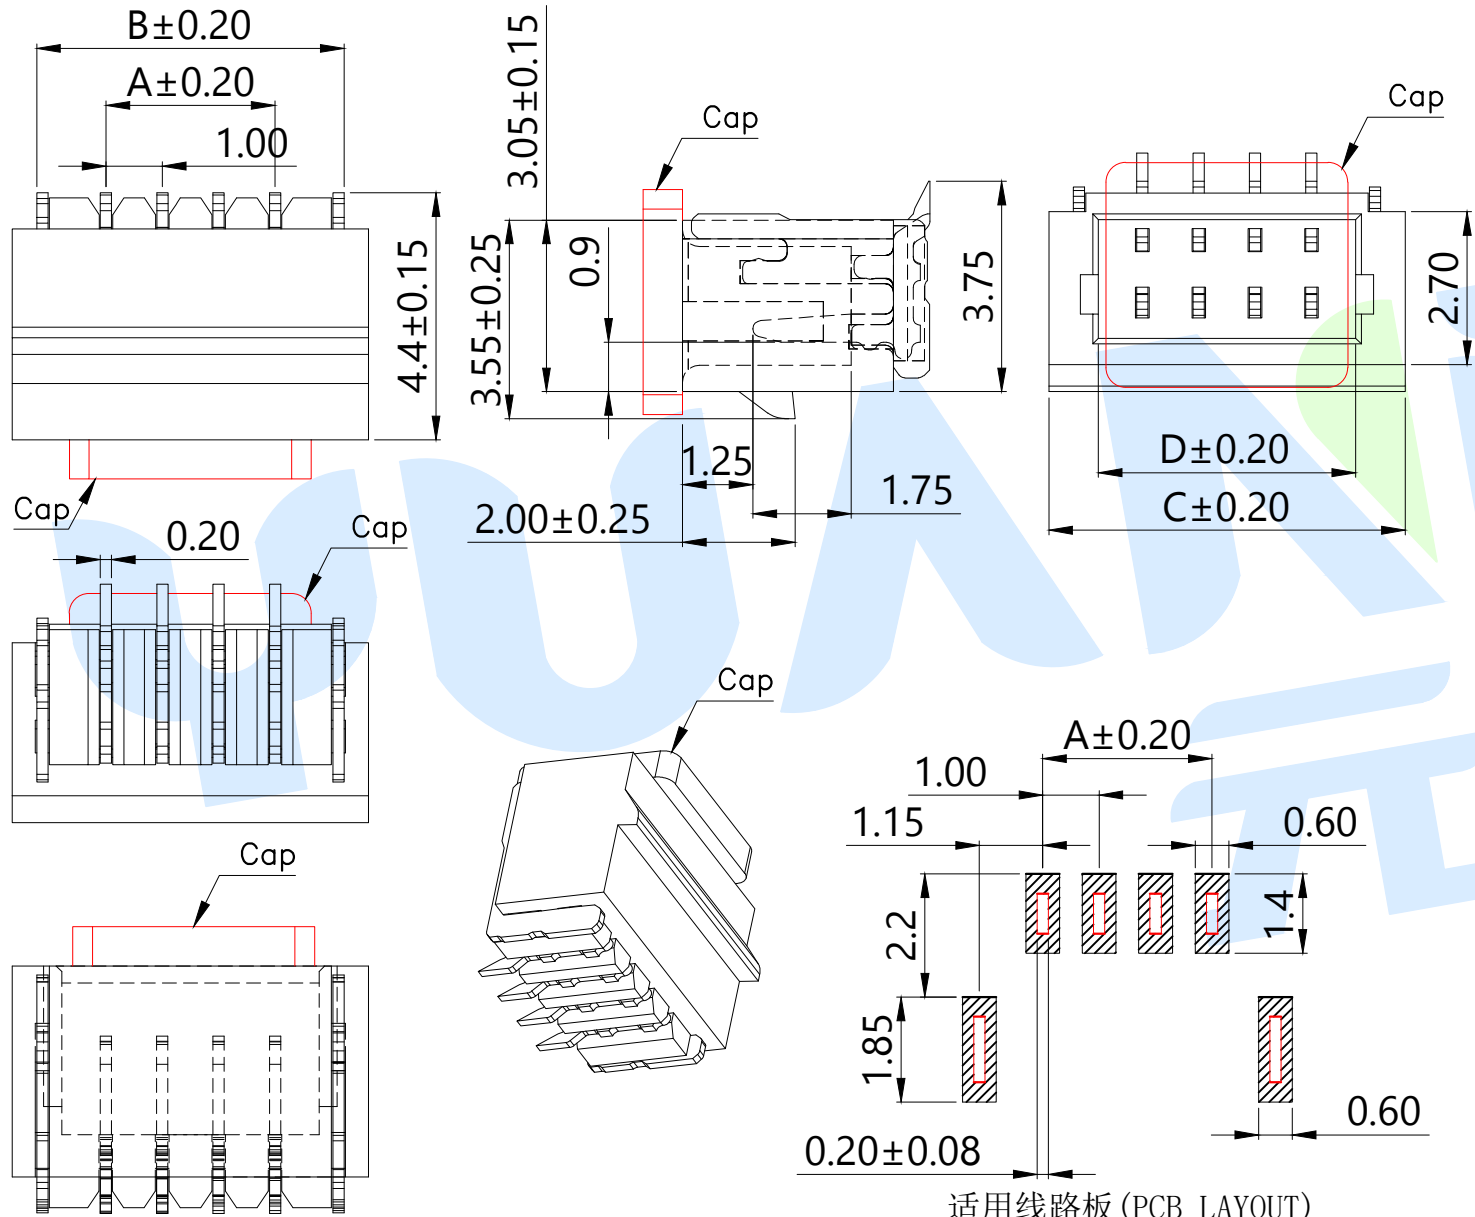

| Model No.             | Pin | A     | B     | C     | D     |
|-----------------------|-----|-------|-------|-------|-------|
| WAFER-SHB1.0-2PLT-W1  | 2   | 1.00  | 3.50  | 4.35  | 2.60  |
| WAFER-SHB1.0-3PLT-W1  | 3   | 2.00  | 4.50  | 5.35  | 3.60  |
| WAFER-SHB1.0-4PLT-W1  | 4   | 3.00  | 5.50  | 6.35  | 4.60  |
| WAFER-SHB1.0-5PLT-W1  | 5   | 4.00  | 6.50  | 7.35  | 5.60  |
| WAFER-SHB1.0-6PLT-W1  | 6   | 5.00  | 7.50  | 8.35  | 6.60  |
| WAFER-SHB1.0-7PLT-W1  | 7   | 6.00  | 8.50  | 9.35  | 7.60  |
| WAFER-SHB1.0-8PLT-W1  | 8   | 7.00  | 9.50  | 10.35 | 8.60  |
| WAFER-SHB1.0-9PLT-W1  | 9   | 8.00  | 10.50 | 11.35 | 9.60  |
| WAFER-SHB1.0-10PLT-W1 | 10  | 9.00  | 11.50 | 12.35 | 10.60 |
| WAFER-SHB1.0-11PLT-W1 | 11  | 10.00 | 12.50 | 13.35 | 11.60 |
| WAFER-SHB1.0-12PLT-W1 | 12  | 11.00 | 13.50 | 14.35 | 12.60 |
| WAFER-SHB1.0-13PLT-W1 | 13  | 12.00 | 14.50 | 15.35 | 13.60 |
| WAFER-SHB1.0-14PLT-W1 | 14  | 13.00 | 15.50 | 16.35 | 14.60 |
| WAFER-SHB1.0-15PLT-W1 | 15  | 14.00 | 16.50 | 17.35 | 15.60 |
| WAFER-SHB1.0-16PLT-W1 | 16  | 15.00 | 17.50 | 18.35 | 16.60 |
| WAFER-SHB1.0-13PLT-W1 | 17  | 16.00 | 18.50 | 19.35 | 17.60 |
| WAFER-SHB1.0-14PLT-W1 | 18  | 17.00 | 19.50 | 20.35 | 18.60 |
| WAFER-SHB1.0-15PLT-W1 | 19  | 18.00 | 20.50 | 21.35 | 19.60 |
| WAFER-SHB1.0-16PLT-W1 | 20  | 19.00 | 21.50 | 22.35 | 20.60 |

WAFER-SHB1.0-□□PLT-W1 (-P=盘装, 非盘装不启用)

- Specifications/技术规格:
- 1.Poles/线数: 2~20P
  - 2.Wire range/适用线规: AGW 32#~28#
  - 3.Applicable PC board thickness/适用PC板厚度: 0.6~1.2mm
  - 4.Current rating/额定电流: 1.0A
  - 5.Voltage rating/额定电压: 50V DC/AC
  - 6.Insulation Resistance/绝缘电阻: 100MΩ Min
  - 7.Dielectric Withstanding/ 耐电压: 500V AC/minute
  - 8.Contact Resistance/ 接触电阻: 20mΩ Max
  - 9.Operating Temperature/ 工作温度: -25°C to +85°C

| ◎   | Soldering lug |        | 1   | Phosphorous copper | Plating Sn |
|-----|---------------|--------|-----|--------------------|------------|
| Ⓑ   | Terminal      |        |     | Phosphorous copper | Plating Sn |
| Ⓐ   | Housing       |        | 1   | LCP                | Off White  |
| NO. | Name          | Number | Qty | Materil            | Remarks    |

YUANDI® Yuandi Electronics Co, Ltd

|          |      |       |                       |
|----------|------|-------|-----------------------|
| design   | date | name  | WAFER CONNECTOR       |
| Review   | date | model | WAFER-SHB1.0-□□PLT-W1 |
| Approved | date |       |                       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Zhongdi](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)