

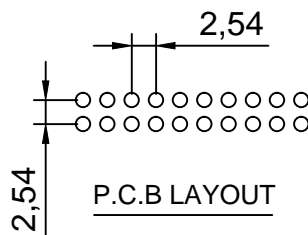
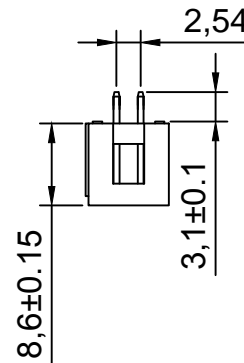


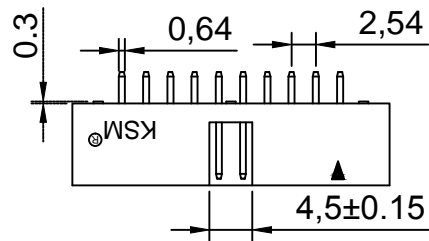

N=PIN数

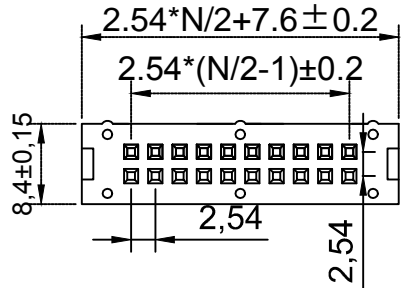

Material  
 Insulator: Glass filled PBT,(UL 94V-0)  
 Contact : Brass  
 Surface Coating:GOLD Over Nickel

Electrical Characteristics  
 Current rating:1.5Amps  
 Dielectric Withstanding Voltage:AC 500V for 1 Minute.  
 Insulator Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Operating Temperature:-40°C ~+105°C

未注公差尺寸			DC3-2.54-20PAS	上海洲日电子有限公司			
尺寸	公差			Shanghai Zhouri Electronics CO.,LTD			
X.	±0.3	±5°	20171018 A/0	上海康司玛电子设备进出口有限公司			
X.X	±0.2	±3°		Shanghai KangSiMa Eletronic Equipment import and export Co.,LTD			
X.XX	±0.15			TEL:86-21-34975176/51571121			
绘图	周元金	201171018	ZR20171018-178	物料编号	1:1	mm	图幅
审核	张海娜	201171018			1	1	A4
核准	章妹	20181111					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [ZHOURI](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)