

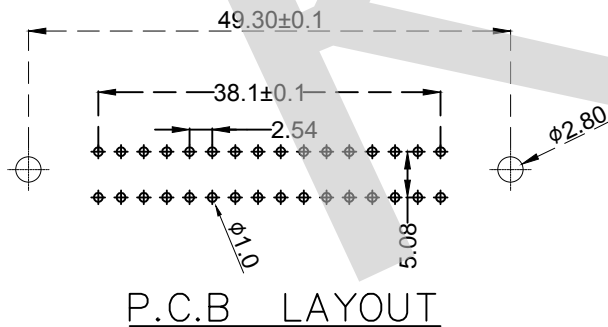

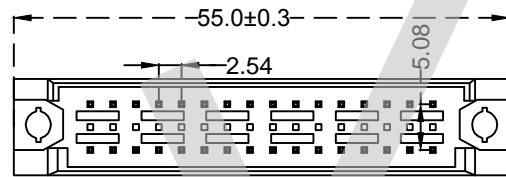


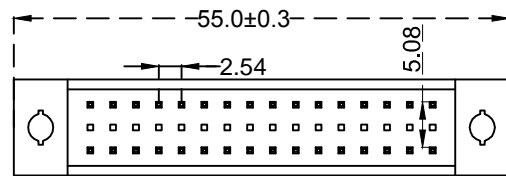

Material材料  
 Insulator 塑胶: 30%Glass filled PBT, (UL 94V-0)  
 Contact 端子: Brass 黄铜  
 Electrical Characteristics 电气特性  
 Current rating 额定电流: 1.5AMP  
 Dielectric Withstanding Voltage 耐压:  
 AC 1000V for 1Minute.  
 Insulator Resistance 绝缘电阻:  
 1000MΩ Min. AT DC 500V.  
 Contact Resistance 接触电阻: 30MΩ Max. AT DC 100mA.  
 Operating Temperature 工作温度: -40℃~+105℃

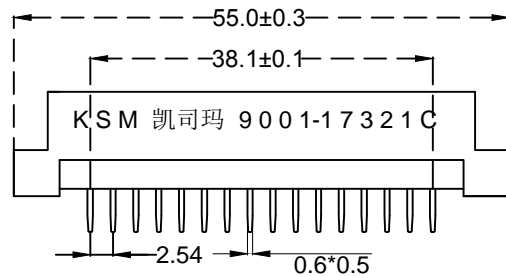

P.C.B LAYOUT

未注公差尺寸			KSM-9001-17321C 332		上海洲日电子有限公司 Shanghai Zhouri Electronics CO.,LTD			
尺寸	公差		版本号	20171018 A/0	上海康司玛电子设备进出口有限公司 Shanghai KangSiMa Eletronic Equipment import and export Co.,LTD			
	长度	角度			TEL:86-21-34975176/51571121			
X	±0.3	±5°	图编号	ZR20171018-15	: 1 1			
X.X	±0.2	±3°						
X.XX	±0.15							
绘图	周元金	201171018	图编号	ZR20171018-15	TEL:86-21-34975176/51571121			
审核	张海娜	201171018	物料编号	110666	: 1 1			
核准	章妹	20181113			: 1 1			



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [ZHOURI](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [MIS-048-01-F-D-DP-K](#)  
[832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [MDF7-40DP-2.54DSA\(55\)](#)  
[55323-1519](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [10124054-515LF](#) [68685-603](#)  
[8-1616154-3](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FX23-40P-0.5SV15B](#) [FCN-214J100-G/0](#) [354184](#) [P50-028-DDS-TG](#) [53309-2471](#)  
[54546-2071](#) [1586617-1](#) [504248-1210](#) [504248-2010](#) [1-1437355-2](#) [9159005551906](#) [NDS100-004-BF](#) [93696-730LF](#) [91922-31141LF](#) [505274-](#)  
[3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71660-7580](#) [73420-5192](#) [360-10-107-00-001000](#)