

## 性能

额定电压: 300V-320V

额定电流: 20A

耐电压: AC2000V/1Min

导线线径: 22-12AWG (2.5MM)

温度范围: -40℃至+105℃

最大锁紧扭力: 8kg.cm

## 材质及电镀


间距: 8.5mm

极数: 2P-4P

螺丝: M3、钢、镀锡

端子: 黄铜、镀锡

塑件: PA66. UL94V-0

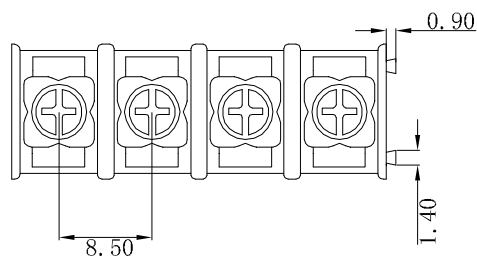

UNLESS OTHERWISE SPECIFIED			PLPK8500-NP		上海洲日电子有限公司 Shanghai zhouri Electronics CO.,LTD.					
DIMENSION	TOLERANCE									
	DECIMAL	ANGLE	MODEL NO.	Pin Header	MATERIAL		FINISH			
X.	±0.3	±1°								
X.X	±0.2	±0.5°								
X.XX	±0.1		DWG. NO.	ZR-Pin Header-03	COLOR		QUANTITY			
X.XXX	±0.05									
DESIGNED										
CHECKED			REV.	A	SCALE	1:1	UNIT	mm	SIZE	A4
APPROVED			THE THIRD ANGLE PROJECTION				SHEET OF PAGES			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Barrier Terminal Blocks](#) category:*

*Click to view products by [ZHOURI](#) manufacturer:*

Other Similar products are found below :

[CR151D20104](#) [670A-RZ-15-KT20](#) [6C1N03](#) [6PCR-02](#) [6PCR-02-008](#) [6PCR-05-008](#) [6PCR-08-008](#) [6PCR-09-008](#) [6PCR-13-006](#) [6PCR-15-006](#) [6PCV-06-008](#) [6PCV-06-716](#) [6PCV-09-001](#) [6PCV-15-008](#) [6PCV-17-1206](#) [6PCV-20-323](#) [6STR-06-006](#) [6STR-08-006](#) [6STR-12-008](#) [6STR-13-006](#) [6STR-14-008](#) [6STR-16-008](#) [6STR-17-008](#) [6STR-21-008](#) [6STR-25-008](#) [6STR-27-008](#) [6STV-03-008](#) [6STV-09-006](#) [6STV-10-006](#) [6WWV-11-008](#) [6WWV-12-008](#) [6WWV-16-008](#) [71502-50](#) [71507-47-50](#) [72504-C-50](#) [72506-C](#) [72507-C-50](#) [72508-56](#) [73203](#) [75505-C-50](#) [812-GP-3/4ST-09](#) [812-GPZ-03PSB](#) [8-1437402-5](#) [8-1437402-7](#) [8PCR-06-006](#) [8PCR-11-006](#) [8PCV-04-001](#) [8PCV-05-008](#) [8PCV-09-006](#) [8PCV-15-006](#)