



Specifications规格  
 Rated额定参数:300V , 25A  
 Dielectric strength抗电强度:AC2000V/1 Minute  
 Screw Torque螺丝扭矩:1.3Nm(10.53LB. in)  
 Wire Range线径:22~12AWG  
 Temp. range操作温度:-40°C~+105°C  
 Max soldering瞬时温度:+250°C. 5s  
 Housing Material塑胶材料:PA66  
 Contact端子:Brass, Tin plating黄铜, 镀锡  
 Screw螺丝:M4.0 Steel, Ni plating M3.0, 钢, 镀镍



		9500	上海洲日电子有限公司 Shanghai Zhouri Electronics CO.,LTD		
			上海康司玛电子设备进出口有限公司 Shanghai KangSiMa Eletronic Equipment import and export Co.,LTD		
X.	±0.3	±5°	20171018 A/0	TEL:86-21-34975176/51571121	
X.X	±0.2	±3°	ZR20171018-344	1:1	mm 图幅 A4
X.XX	±0.15		物料编号		
		201171018			
		201171018			
		201171018			

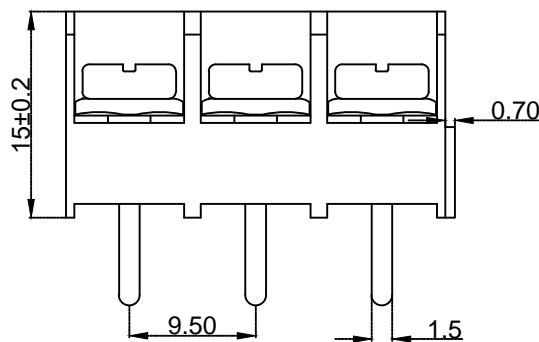

: 1 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Barrier Terminal Blocks](#) category:*

*Click to view products by [ZHOURI](#) manufacturer:*

Other Similar products are found below :

[CR151D20104](#) [670A-RZ-15-KT20](#) [6C1N03](#) [6PCR-02](#) [6PCR-02-008](#) [6PCR-05-008](#) [6PCR-08-008](#) [6PCR-09-008](#) [6PCR-13-006](#) [6PCR-15-006](#) [6PCV-06-008](#) [6PCV-06-716](#) [6PCV-09-001](#) [6PCV-15-008](#) [6PCV-17-1206](#) [6PCV-20-323](#) [6STR-06-006](#) [6STR-08-006](#) [6STR-12-008](#) [6STR-13-006](#) [6STR-14-008](#) [6STR-16-008](#) [6STR-17-008](#) [6STR-21-008](#) [6STR-25-008](#) [6STR-27-008](#) [6STV-03-008](#) [6STV-09-006](#) [6STV-10-006](#) [6WWV-11-008](#) [6WWV-12-008](#) [6WWV-16-008](#) [71502-50](#) [71507-47-50](#) [72504-C-50](#) [72506-C](#) [72507-C-50](#) [72508-56](#) [73203](#) [75505-C-50](#) [812-GP-3/4ST-09](#) [812-GPZ-03PSB](#) [8-1437402-5](#) [8-1437402-7](#) [8PCR-06-006](#) [8PCR-11-006](#) [8PCV-04-001](#) [8PCV-05-008](#) [8PCV-09-006](#) [8PCV-15-006](#)