

2R Ceramic Surge Arresters

SPECIFICATION

Changzhou Wujin Jiangnan Discharge Tube Co.,Ltd

Add:Zouqu Town Industrial Zone, Wujin Changzhou City, Jiangsu, China Tel: 0519-83631254 Fax: 0519-83631533

Email:jiangnan@jiangnan-cn.cn

Type: 2R1500A5L




• Electrical Characteristics

DC spark-over voltage		1500	V				
1		± 20	%				
Impulse spark-over voltage							
at $100V/\mu$ s - for 99% of measured values		<1800	V				
-typical values of distribution		<1700	V				
at 1 kV/ μ s - for 99% of measured values - typical values of distribution		< 2000	V				
		<1800	V				
Service life							
10 operations	50Hz, 1s	5	A				
10 operations	$8/20~\mu~s$	5	kA				
1 operations	8/20 μ s	10	kA				
Insulation resistance at 100Vdc		>10	GΩ				
Capacitance at 1 MHz		<1.5	pF				
Arc voltage at 1 A		~22	V				
Glow to arc transition current		~1	A				
Glow voltage		~180	V				
Weight		~2.0	g				
Operation and storage temperature		-40+125	$^{\circ}$ C				
Marking, red		2R1500 2R -Two Electrode 1500 -Nominal voltage					
						1	



Dimensional drawing

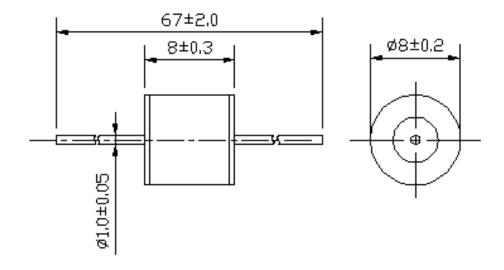

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Gas Discharge Tubes - GDTs / Gas Plasma Arrestors category:

Click to view products by ZOUGUANG manufacturer:

Other Similar products are found below:

M51-A90X PMT1023004 PMT1040004 CG2800 GTCR37-231M-R10 WPGT-2N145B6L WPGT-2N230B6L WPGT-2N470B6L WPGT-2RM230A6L WPGT-2RM350A6L WPGT-2RM70A6L WPGT-2RM90A6L WPGT-2S145 WPGT-2S350 WPGT-2S470 WPGT-3R350CF WPGT-3R350G1 WPGT-3R90G1 WPGT-3R75G1 WPGT-3R470G1 WPGT-3R250C WPGT-3R230G1 WPGT-2S230 WPGT-2RM145A6L WPGT-2R1000B8L WPGT-2N70B6L WPGT-2N350B6L WPGT-2N230B6L1 CG2145 T61-C350X 9071.99.0547 (73_Z-0-0-547) B88069X6940B152 RF1219-000 A9L16618 RF2339-000 9071.99.0052(73_Z-0-0-52) 9071.99.0054 CG32.7L CG6400SM CG6470SM CG7250MS CG7400MS SPBT12-280/1 SPCT2-280/3 SPCT2-280/4 T2 20KA 4P 2003-09-SM-RPLF 2026-07-A1 2026-25-C3 2039-80-BLF