


SOT-23**SOT-23 贴片塑封三极管
SOT-23 Plastic-Encapsulate Transistors****特征 Features**

Marking: Y2

- 与 SS8050 配对; Complementary to SS8050
- 最大功率耗散 300mW; Power Dissipation of 300mW
- 高稳定性和可靠性。High Stability and High Reliability

机械数据 Mechanical Data

- 封装: SOT-23 封装 SOT-23 Small Outline Plastic Package
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
Collector-Base Voltage	V _{CBO}	-40	V
Collector-Emitter Voltage	V _{CEO}	-25	V
Emitter -Base Voltage	V _{EBO}	-5	V
Collector Current-Continuous	I _c	-1500	mA
Collector Power Dissipation	P _c	300	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55~+150	°C
Thermal resistance From junction to ambient	R _{θJA}	417	°C/W

电特性 (TA = 25°C 除非另有规定)







Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).



参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
Collector-base breakdown voltage	V _{(BR)CBO}	I _c =-100uA, I _e =0	-40		V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _c =-0.1mA, I _b =0	-25		V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _e =-100uA, I _c =0	-5		V
Collector cut-off current	I _{CBO}	V _{CB} =-40V, I _e =0		-100	nA
Collector cut-off current	I _{CEO}	V _{CE} =-20V, I _b =0		-100	nA
Emitter cut-off current	I _{EBO}	V _{EB} =-5V, I _c =0		-100	nA
DC current gain	h _{FE(1)}	V _{CE} =-1V, I _c =-100mA	120	400	
	h _{FE(2)}	V _{CE} =-1V, I _c =-800mA	40		
Collector-emitter saturation voltage	V _{CE(sat)}	I _c =-800mA, I _b =-80mA		-0.50	V
Base -emitter saturation voltage	V _{BE(sat)}	I _c =-800mA, I _b =-80mA		-1.20	V
Base-emitter voltage	V _{BE}	V _{CE} =-1V, I _c =-10mA		-1.00	V
Transition frequency	f _T	V _{CE} =-10V, I _c =-50mA, f=30MHz	100		MHz
Collector output capacitance	C _{ob}	V _{CB} =-10V, I _e =0, f=1MHz		20	pF

CLASSIFICATION OF h_{FE(1)}


RANK	L	H	J
RANGE	120-200	200-350	300-400

Typical characteristics

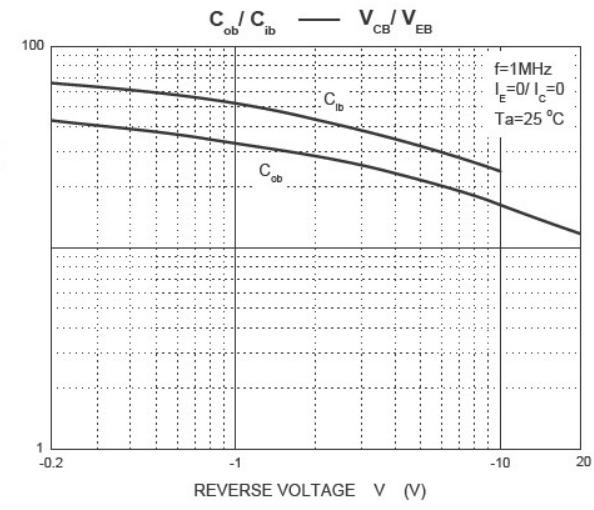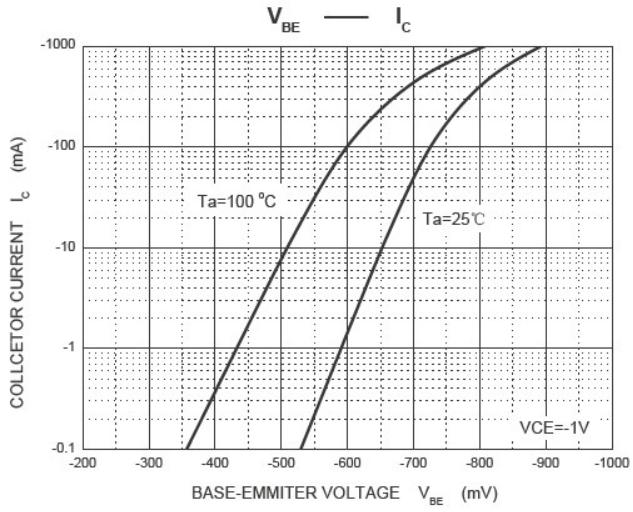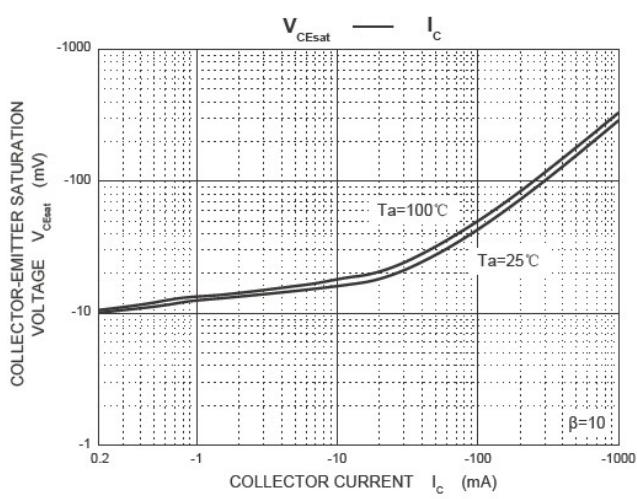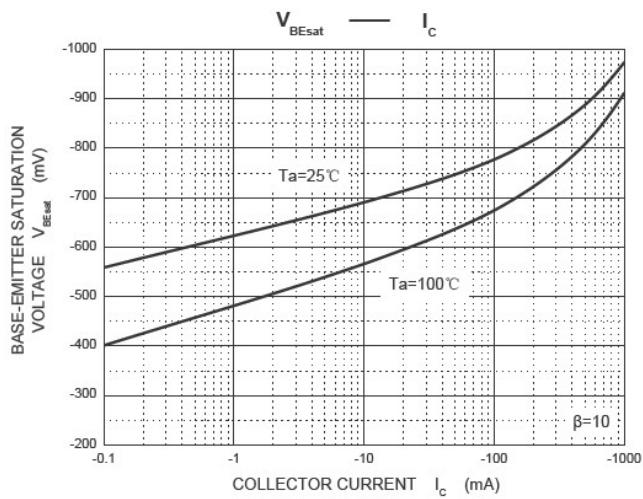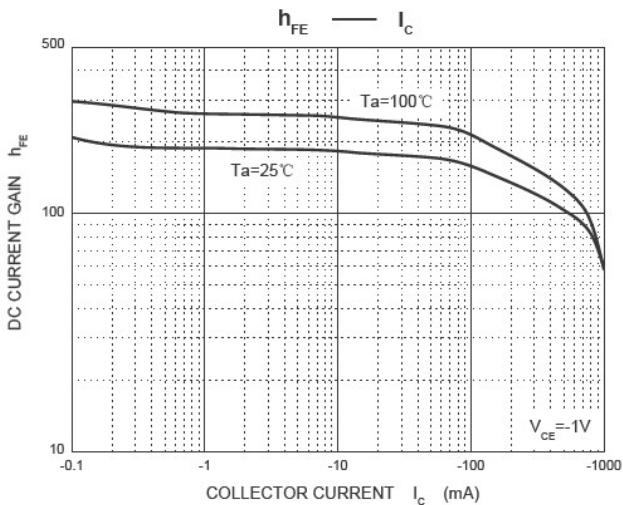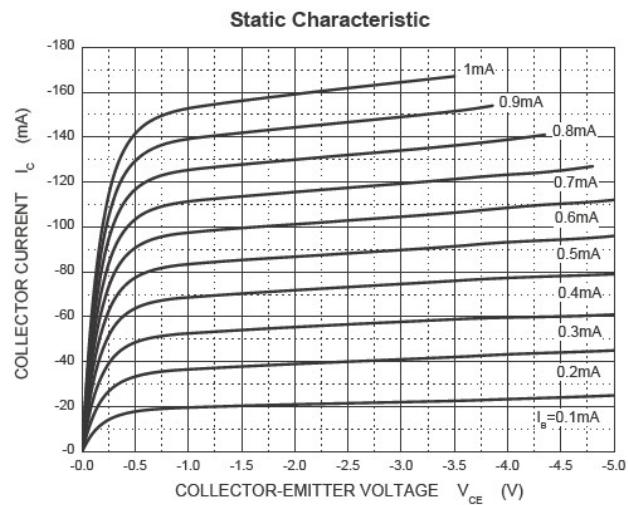

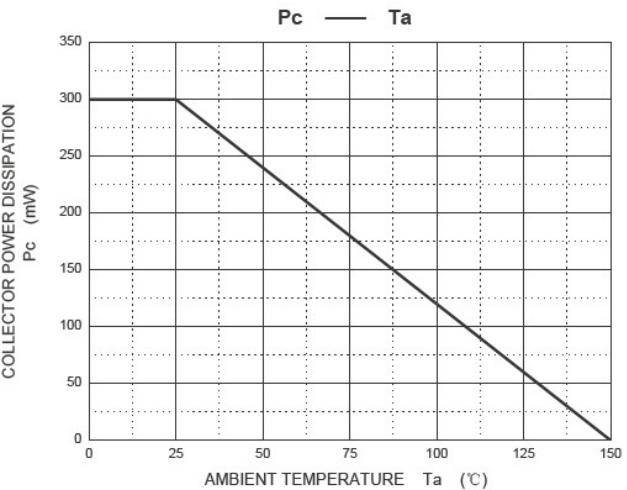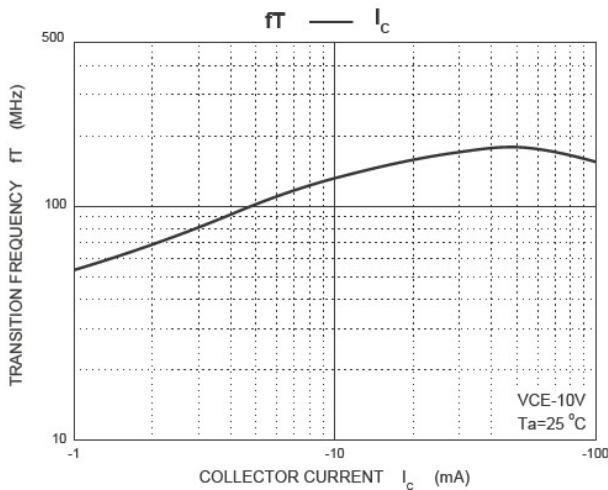

SOT-23 PACKAGE OUTLINE Plastic surface mounted package

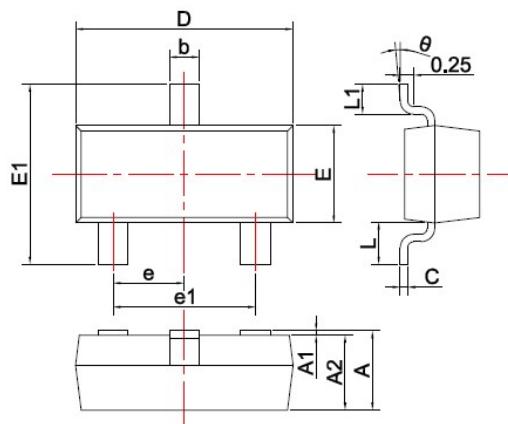


SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs



Note:

1. Controlling dimension: In millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by ZRE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC4731T-AY](#)
[2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FJPF5304DTU](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SB1324-TD-E](#) [2SC2412KT146S](#)
[2SC3332T](#) [2SC3902S](#) [2SC5231C8-TL-E](#) [2SD1685F](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [US6T6TR](#) [NJL0281DG](#)
[732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [SZT1010T1G](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [2N3583](#)
[30A02MH-TL-E](#)