



Art No. HD0102

HDMI Extender over CAT 5e/6 Cable



The HD0102 HDMI Extender uses two pieces of CAT 5e/6 cables to extend the HDTV display up to 30 meters for 1080P. It not only breaks the limitation of the HDMI cable transmission length, but also CAT 5e/6 has more flexibility and convenience in cable construction.

Specification:

- Compliance with HDMI High Speed specification
- 2 HDMI Adapters for CAT 5e/6 patch cable
- Automatic device configuration
- Supports 1080p with Cat 6 patch cable up to 30m
- HDTV: 480i/576i/480p/576p/720p/1080i/1080p
- Supports Dolby Digital, DTS Digital, DTS HD, Dolby True HD
- Bandwidth: 165MHz/1.65Gbps per channel (4.95Gbps all channel)
- Supports HDCP pass-through, LPCM
- Supports 8bit per channel (24bit all channel) deep color
- Product Dimension: 45 x 25 x 81 mm
- Product Weight: 0.3585kg
- The type of Connector : HDMI Type A 19 pin

Package contents

- 1 x Main unit NO. 1 Transmitter
- 1 x Main unit NO. 2 Receiver
- 1 x External Power Supply
- 1 x User Manual

- Carton Dimension: 560x300x300 mm
- Carton Q'ty: 30pcs
- Carton Weight: 13.3kg

Packaging Information:

- Packing Dimension: 174x134x57 mm
- Packing Weight: 0.42kg



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered network of their respective owners.



Made in China




Art No. HD0102

HDMI Extender over CAT 5e/6 Cable

Specification:

Signal Inputs/Output	
Input Video Signal	0.5 -1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Maximum Single Link Range	1920x1080p
Output Video	HDMI High Speed
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	1.65Gbps/165MHz
Transmission distance	
CAT-6 cable	30M for1080p
Resolutions(HDTV)	
Interlaced (50&60Hz)	480i, 576i, 1080i
Progressive (50&60Hz)	480p, 576p, 720p, 1080p
Environmental	
Operating Temperature	0 to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 95 % RH (no condensation)
Power Requirement	
External Power Supply	5V DC@2A
Power consumption (Max)	5W

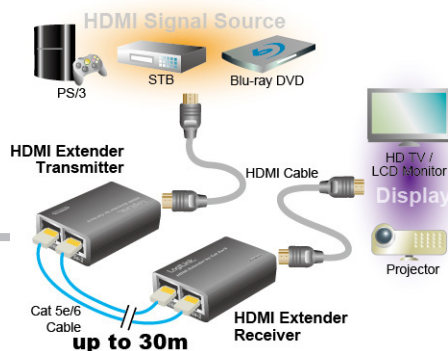

* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered network of their respective owners.



Made in China

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI Cables](#) category:

Click to view products by [Logilink](#) manufacturer:

Other Similar products are found below :

[426301400-3](#) [cab-DP to HDMI Passive](#) [HD2003 010S1](#) [68783-0055](#) [PND400](#) [UA0329](#) [50472](#) [50586](#) [HD0003](#) [HD0102](#) [31888](#) [31889](#)
[31893](#) [31897](#) [31907](#) [31908](#) [31911](#) [31913](#) [31914](#) [31915](#) [31919](#) [31920](#) [31921](#) [31923](#) [31925](#) [31926](#) [31929](#) [31935](#) [31936](#) [31937](#) [31941](#)
[31943](#) [31944](#) [CV0036B](#) [CV0038](#) [CV0055](#) [CV0057](#) [CV0057B](#) [CV0058](#) [CV0058B](#) [CV0059B](#) [50580](#) [50581](#) [50582](#) [50989](#) [50992](#) [51579](#)
[51586](#) [51724](#) [51758](#)