
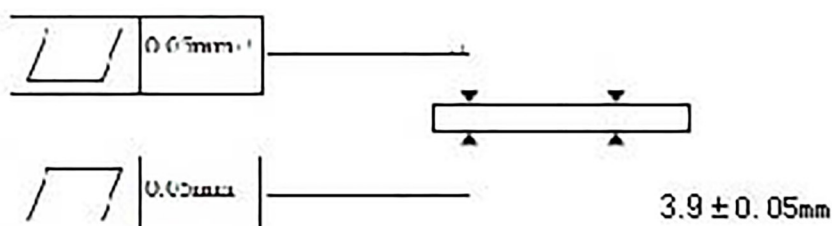
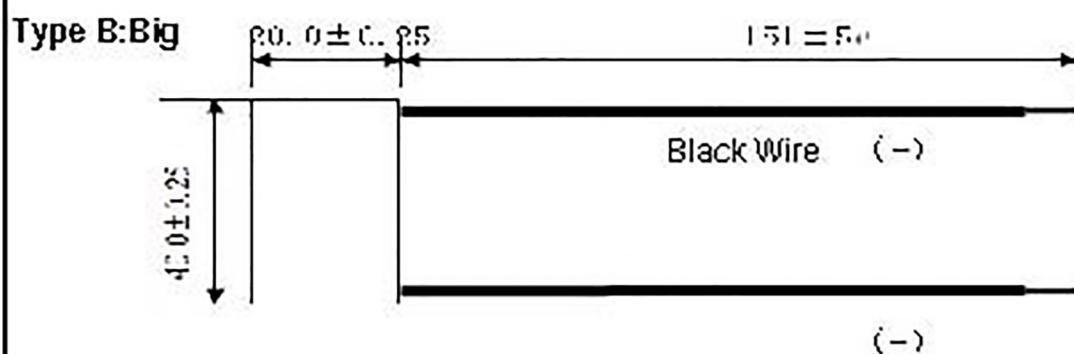
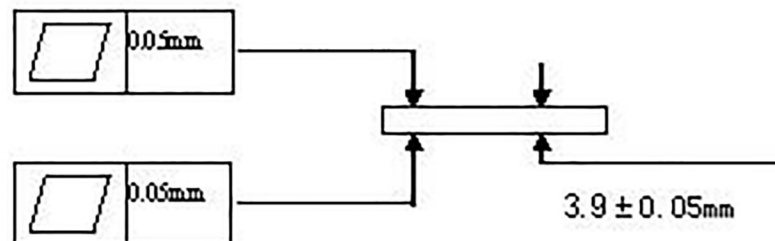




Specification


| | |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item Number: | PM-40X40-42 |
| Device Outline | See picture below |
| Heat-shrink tube on the end of wire | Not available |
| Wire Criteria | 1. 20AWG UL, PVC insulated 2. Standard 105°C tinned copper wire 3. General length: 151±5mm 4. Length of tinning without outer sphere on the end of wire: 5±1.0mm |
| Resistance (ohms) | Environment Temperature 20°C, 1KHZ, 0.95-1.05 (ohms) |
| Packing | Foam box |
| Printing | See picture below |

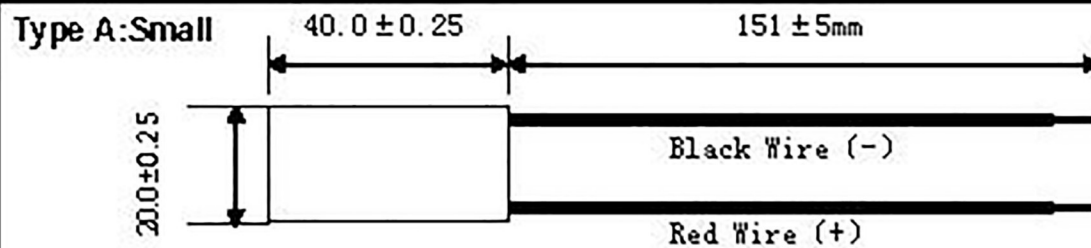

Other Requirement

1. Working Temperature: -55 °C to +80°C
2. Assembled overhelm force: 80lb(Sq)In.
3. P.N Couples: 63 couples
4. I_{max} : $6 \pm 0.5A$ (7.6V CD)
5. V_{max} : 7.6VDC
6. Q_{max} : 42W (7.6VDC)
7. Resistance range: AC-R 0.95-1.05 Ω (Surrounding Temperature 20°C 1KHZ)
8. $\Delta T_{max} \geq 63^\circ C$
9. Wire should be soldered on the hot side
10. 20#AWG UL, PVC insulated, Standard 105°C tinned copper wire

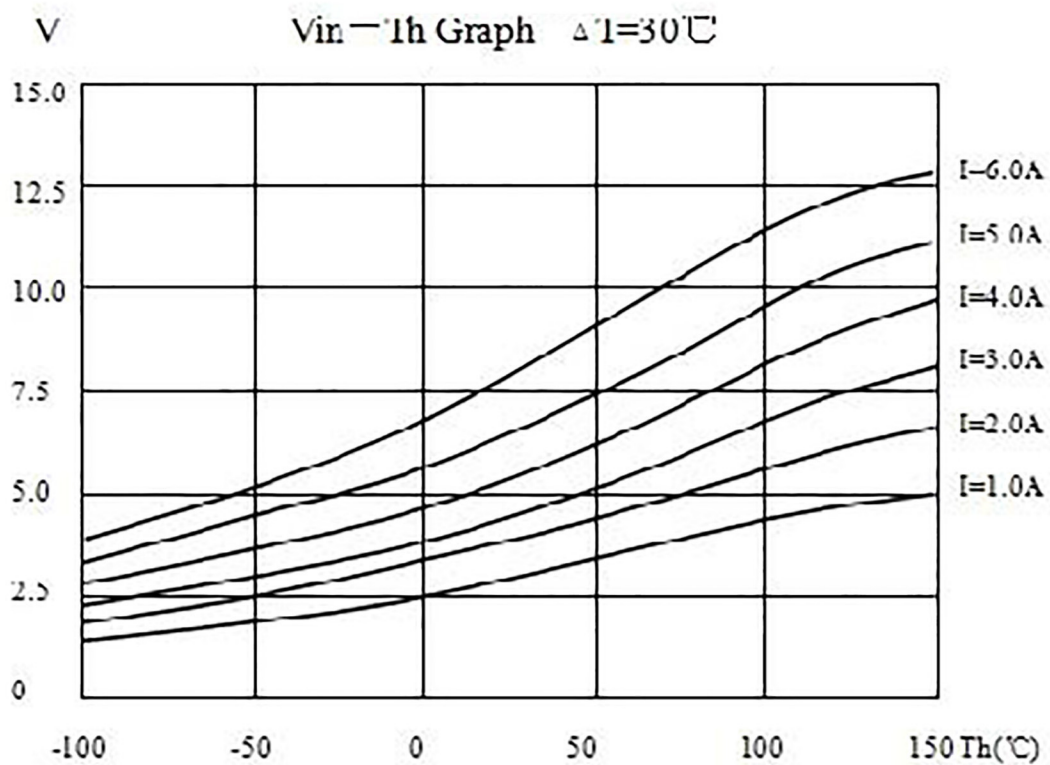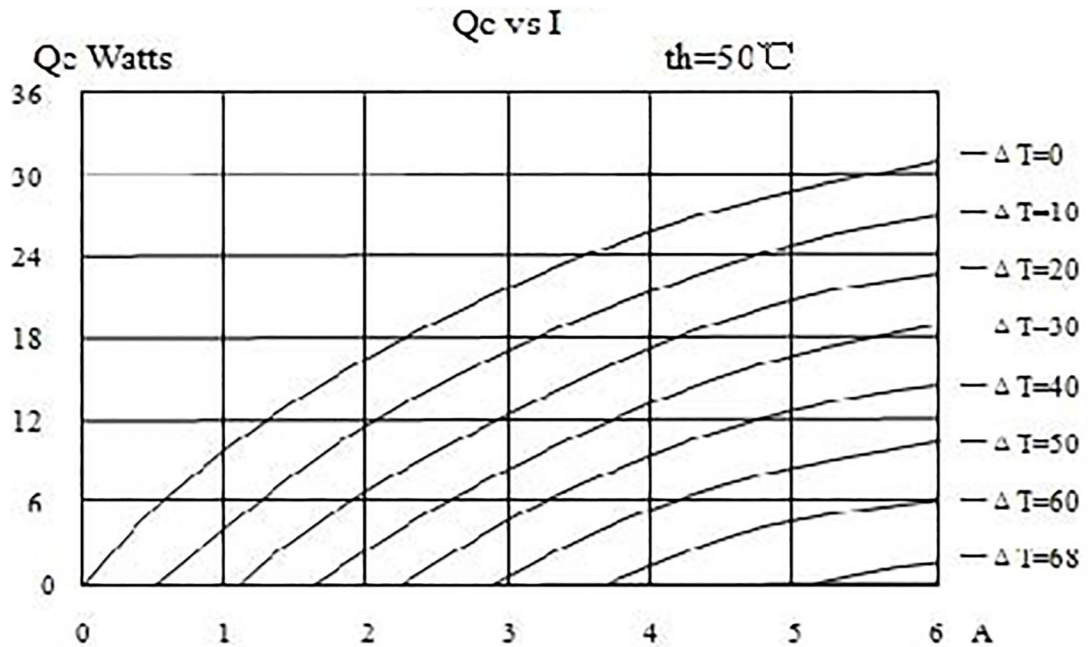

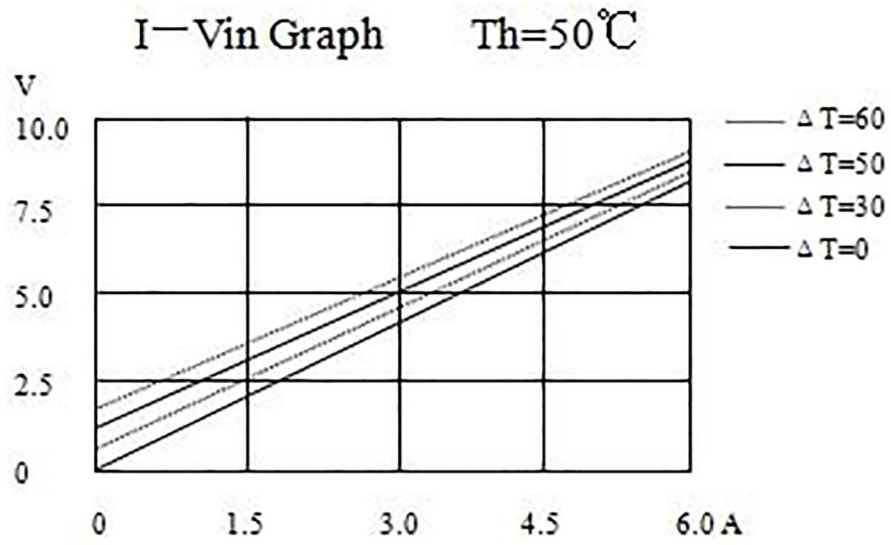

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thermoelectric Assemblies](#) category:

Click to view products by [Stonecold](#) manufacturer:

Other Similar products are found below :

[AA-150-48-44-LK-XX](#) [TEC1-07108](#) [TES1-12704](#) [TEC1-04908](#) [TEC1-06310](#) [TEC1-06315](#) [DA-044-12-02-00-00](#) [387000840](#) [DA-045-24-02-00-00](#) [387000866](#) [AA-040-12-22-00-00](#) [387000177](#) [387000913](#) [387000919](#) [TC-18-QC-50](#) [DA-051-24-02-00-00](#) [387000918](#) [387000910](#) [TC-WIRE3-PR-59](#) [WL 2000](#) [AA-150-24-44-00-XX](#) [DA-039-12-02-00-00](#) [AA-060-24-22-00-00](#) [DA-020-12-02-00-00](#) [AAC050-24-22-00-00](#) [TC-18-QE-50](#) [LA-115-24-02-00-00](#) [LA-045-12-02-00-00](#) [DA-160-24-02-00-00](#) [DA-108-24-02-00-00](#) [DA-045-12-02-00-00](#) [DA-024-12-02-00-00](#) [AA-060-12-22-00-00](#) [AA-033-12-22-00-00](#) [AA-019-12-22-00-00](#) [387000872](#) [387000176](#) [387002414](#) [AA-026-12-22-00-00](#) [AA-150-24-44-LK-XX](#) [AA-150-48-44-00-XX](#) [DA-033-12-02-00-00](#) [DA-075-12-02-00-00](#) [DL-120-24-00-00-00](#) [LAC-046-24-02-00-00](#) [L-ADAP-8-1/8](#) [LL-060-12-00-00-00](#) [SAA-170-24-22-00-00](#) [SDA-195-24-22-00-00](#) [TC-NTC-1](#)