


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINTOP® STR-M</b>	29.11.2013

For the benefits, refer to SKINTOP® ST-M



Wide clamping range




Maximum vibration protection



Mechanical resistance



Assembly time



Optimum strain relief



Temperature-resistant



Variety of approval certifications

### Info

Now with IP 69 K approval! Proven to withstand the most demanding cleaning procedures for industrial machinery with high-pressure cleaners and hot water!

### Application range

With reducing seal insert, to seal cables with smaller outer diameters.

### Design

Metric connection thread acc. to EN 50262

### Norm references / Approvals

UL File Nr. E79903

### Note

Refer to SKINTOP® metric accessories for suitable accessories

Counter nut to be used: SKINTOP® GMP-GL-M


SKINTOP® STR M ISO types have an extra-long connection thread

SKINTOP® STR M ISO versions with extra-long connection thread, see table, no DNV approval

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Product Management	Document: LAPP_PRO977EN.pdf	1 / 5
--------------------	-----------------------------	-------

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	 <b>LAPP GROUP</b>
	<b>SKINTOP® STR-M</b>	<b>29.11.2013</b>

**Technical Data**

Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Tests:	GGVS: TÜ.EGG.020-95
Protection rating:	IP 68 - 5 bar IP 69 K
Temperature range:	Fixed: -40°C to +100°C Dynamic: -20°C to +100°C

Product Management	Document: LAPP_PRO977EN.pdf	2 / 5
--------------------	-----------------------------	-------


Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)
<b>SKINTOP® STR-M silver grey</b>				
53111100	STR-M 12 x 1,5	1-5	15	30.0
53111110	STR-M 16 x 1,5	2-7	19	34.0
53111120	STR-M 20 x 1,5	5-10	25	37.0
53111130	STR-M 25 x 1,5	6-13	30	40.0
53111140	STR-M 32 x 1,5	7-15	36	47.0
53111150	STR-M 40 x 1,5	15-23	46	52.0
53111160	STR-M 50 x 1,5	22-29	55	62.0
53111170	STR-M 63 x 1,5	28-39	66	71.0
<b>SKINTOP® STR-M black</b>				
53111300	STR-M 12 x 1,5	1-5	15	30.0
53111310	STR-M 16 x 1,5	2-7	19	34.0
53111320	STR-M 20 x 1,5	5-10	25	37.0
53111330	STR-M 25 x 1,5	6-13	30	40.0
53111340	STR-M 32 x 1,5	7-15	36	47.0
53111350	STR-M 40 x 1,5	15-23	46	52.0
53111360	STR-M 50 x 1,5	22-29	55	62.0
53111370	STR-M 63 x 1,5	28-39	66	71.0
<b>SKINTOP® STR-M light grey</b>				
53111500	STR-M 12 x 1,5	1-5	15	30.0
53111510	STR-M 16 x 1,5	2-7	19	34.0
53111520	STR-M 20 x 1,5	5-10	25	37.0
53111530	STR-M 25 x 1,5	6-13	30	40.0
53111540	STR-M 32 x 1,5	7-15	36	47.0
53111550	STR-M 40 x 1,5	15-23	46	52.0
53111560	STR-M 50 x 1,5	22-29	55	62.0
53111570	STR-M 63 x 1,5	28-39	66	71.0
<b>SKINTOP® STR M ISO silver-grey (with long metric connecting thread)</b>				
53017110	STR M 16 x 1,5	2-6	19	40.0
53017130	STR M 20 x 1,5	4-9	24	45.0
53017140	STR M 25 x 1,5	6-12	27	47.0


Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)
SKINTOP® STR M ISO black (with long metric connecting thread)				
53017310	STR M 16 x 1,5	2-6	19	40.0
53017330	STR M 20 x 1,5	4-9	24	45.0
53017340	STR M 25 x 1,5	6-12	27	47.0

Product Management

Document: LAPP\_PRO977EN.pdf

4 / 5

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINTOP® STR-M</b>	29.11.2013

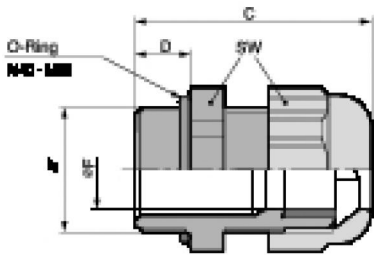

Product Management	Document: LAPP_PRO977EN.pdf	5 / 5
--------------------	-----------------------------	-------

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:*

*Click to view products by [Lapp Kabel](#) manufacturer:*

Other Similar products are found below :

[120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-14](#) [120-123-16](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#) [120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-14](#) [120-126-16](#) [120-126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-116-1-1-06BP-509](#) [120-116-1-1-06CP](#) [120-116-1-1-16BE](#) [120-116-1-1-28BP](#) [120-123-20](#) [120-123-24](#) [120-123-32](#) [120-125-20](#) [120-125-20Y](#) [120-125-24](#) [120-125-24R](#) [120-125-28Y](#) [120-126-14BL](#) [120-126-16R](#) [120-126-16Y](#) [120-126-24BL](#) [120-126-28BL](#) [120-126-32BL](#) [120-126-40](#) [120-126-48](#) [120-126-48BL](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [15190-103 R2](#)