

# iDrive2 - XKL Series


- RS485/Modbus RTU built-in
- Up to 150% starting torque
- Detachable Keypad
- PID Control mode as standard
- Brake chopper built-in
- DC Injection braking
- 0-10V & 0-20mA analog inputs
- 4/5 Digital inputs
- Password function
- 2 year warranty
- IP20
- CE certified
- C2 & C3 filter options
- RoHS compliant
- Temp. range -10°C ~ 50°C



Detachable Keypad



iDrive2 (without filter)



C3 Filter

## Options & Ordering Codes - iDrive2

<b>XKL</b>	—	<b>150</b>	—	<b>21</b>
<b>Nominal Power</b>			<b>Input Voltage</b>	
0.4kW		<b>40</b>		<b>21</b> Input 200-240V ~ Single Phase
0.75kW		<b>75</b>		<b>43</b> Input 380-440V ~ Three Phase
1.5kW		<b>150</b>		
2.2kW		<b>220</b>		

## Options & Ordering Codes - Filters & Accessories

	iDrive 2	C3 Filter	Current	C2 Filter	Current
Single-Phase 230V	XKL-040-21	<b>RFC3-3S</b>	3A	<b>RF29A-1A</b>	29A
	XKL-075-21	<b>RFC3-3S</b>	3A	<b>RF29A-1A</b>	29A
	XKL-150-21	<b>RFC3-10S</b>	10A	<b>RF29A-1A</b>	29A
	XKL-220-21	<b>RFC3-10S</b>	10A	<b>RF29A-1A</b>	29A
Three-Phase 400V	XKL-075-43	<b>RFC3-6</b>	6A	<b>RF15A-4A</b>	15A
	XKL-150-43	<b>RFC3-6</b>	6A	<b>RF15A-4A</b>	15A
	XKL-220-43	<b>RFC3-6</b>	6A	<b>RF15A-4A</b>	15A

### Accessories


<b>XKL-KP</b>	Additional Detachable Keypad
<b>XKL-KP-MB</b>	Keypad Mounting Bracket

# iDrive2 - XKL Series

## Specifications


	Model	Output Power (kW)	Input Current (A)	Output Current (A)	MCCB (A)	Cables (mm <sup>2</sup> )
Single-phase 230V	XKL-040-21	0.4	6.5	2.5	16	1.5
	XKL-075-21	0.75	9.3	4.2	16	1.5
	XKL-150-21	1.5	15.7	7.5	25	2.5
	XKL-220-21	2.2	24	10	50	2.5
Three-phase 400V	XKL-075-43	0.75	3.2	2.5	10	1.5
	XKL-150-43	1.5	4.3	4.2	10	2.5
	XKL-220-43	2.2	7.1	5.5	16	2.5

## Power and Control Connections

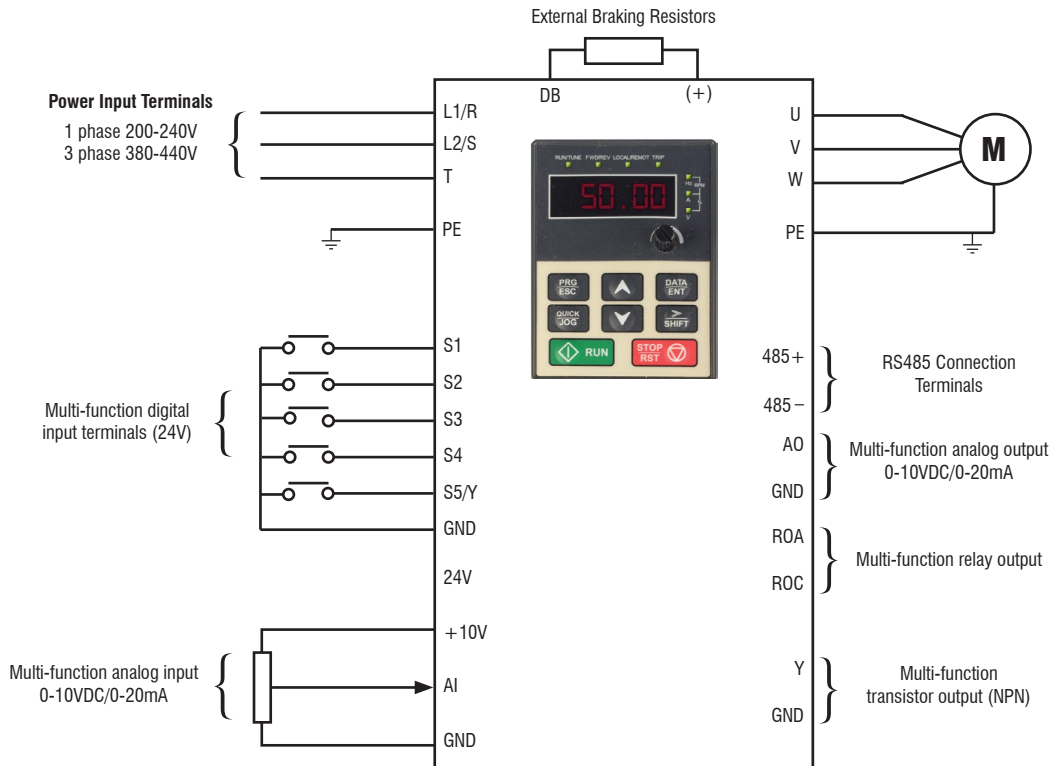

## Dimensions (mm)

	Model	W1	W2	H1	H2	D
Single-phase 230V	XKL-040-21	85.0	74.0	145.5	131.5	134.2
	XKL-075-21	85.0	74.0	145.5	131.5	134.2
	XKL-150-21	100.0	89.0	170.5	154.0	153.2
	XKL-220-21	100.0	89.0	170.5	154.0	153.2
Three-phase 400V	XKL-075-43	85.0	74.0	145.5	131.5	153.2
	XKL-150-43	100.0	89.0	170.5	154.0	153.2
	XKL-220-43	100.0	89.0	170.5	154.0	153.2

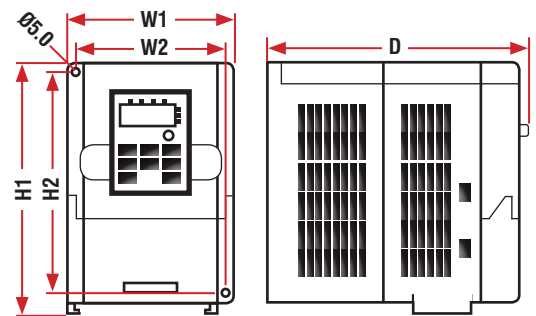

Wall mounting (unit: mm)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for imo manufacturer:*

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [LDC18RRS](#) [SFSYE0111](#) [21.1500M/6-E](#) [20.3304M/2-E](#)  
[21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#) [MSSTC11DA06](#) [20.2500M/4-E](#)  
[20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-SL-12VDC](#)  
[QYE21XXF24DC](#) [20.920M/5-E](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [MC10N-S-10110AC](#) [21.95MV/3](#) [MB09-S-1024](#) [MA05-S-](#)  
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [SRGA-1A-SL-24VDC](#) [21.1500M/3-E](#) [21.95MHF/6-E](#) [20.95MV/2-E](#)  
[20.155MV/4-E](#) [ER2.5BEIGE](#) [20.950M/2-E](#) [MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#)