

F702


Centers 2,70 mm/106 mil

	Current	Temperature
Standard	1,5 A	-20°... +80° C
H-Version ¹	1,5 A	-40°... +250° C

¹On Request

The F702 has been developed for interface-applications. Low projection height combined with high spring force provide an ideal solution for adaptations with limited construction height.

Please find the corresponding interface pin for contacting on page 49.

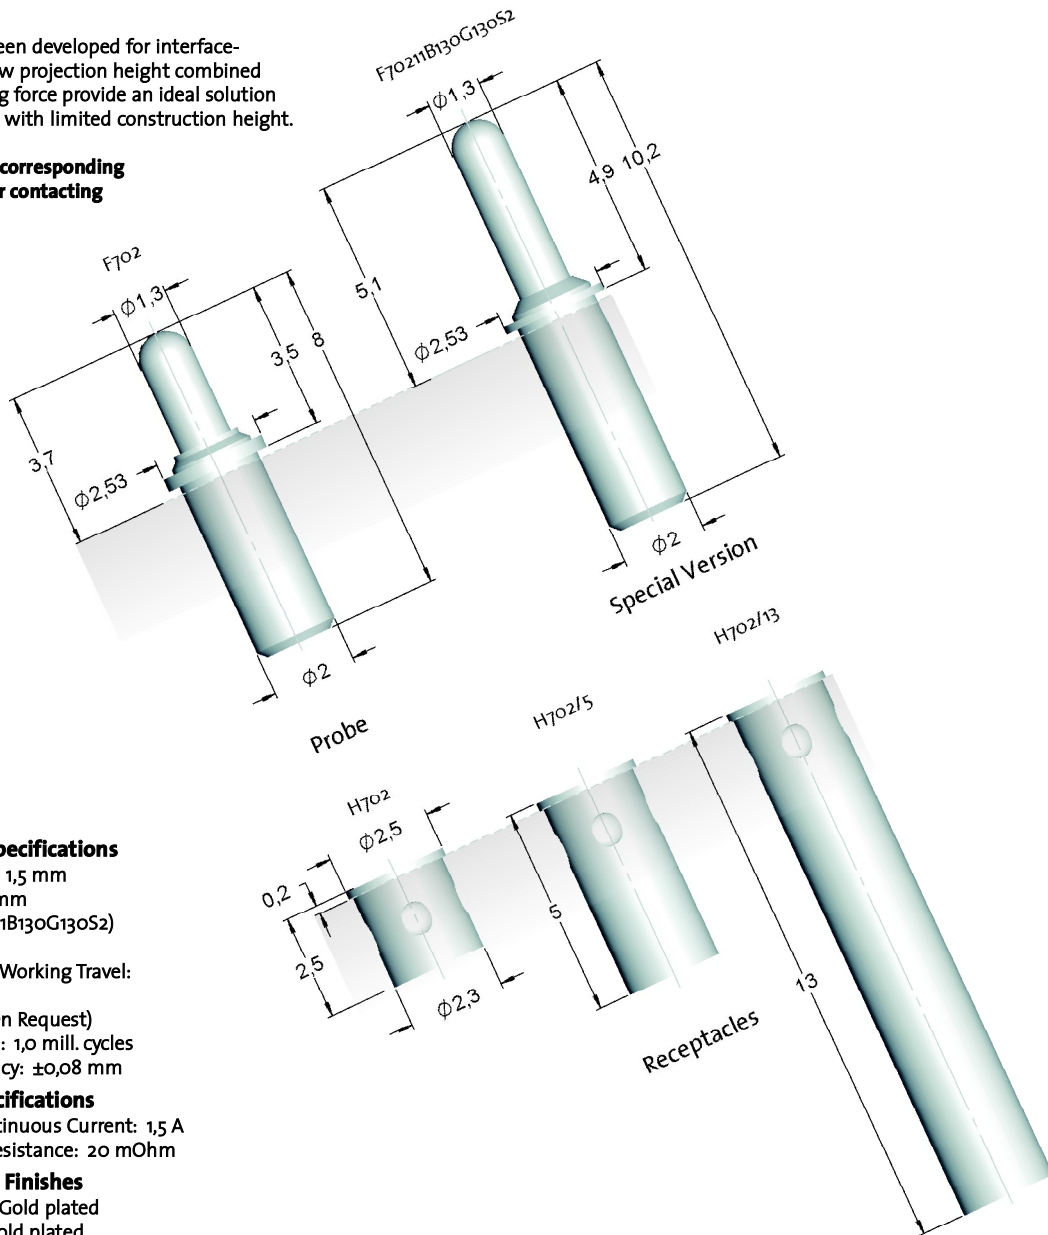

Mechanical Specifications

Working Travel: 1,5 mm
 Full Travel: 2,2 mm
 3,2 mm (F70211B130G130S2)
 Preload: 40 cN
 Spring Force at Working Travel:
 130 cN ±20%
 15 cN ±20% (On Request)
 Mechanical Life: 1,0 mill. cycles
 Pointing Accuracy: ±0,08 mm

Electrical Specifications

Maximum Continuous Current: 1,5 A
 Typical Probe Resistance: 20 mOhm

Materials and Finishes

Plunger: BeCu, Gold plated
 Barrel: Brass, Gold plated
 Spring: Music Wire, Silver plated
 Receptacle: Bronze, Gold plated


Order Example

Type	Tip Diameter	Spring Force
F702	11 B	130 G
Tip Style	Material	Plunger Finish
11	B	G
130	130	
Material:	B = BeCu	
Tip Diameter:	1,3 mm = 130	
Plunger Finish:	G = Gold plated	
Receptacle:	Order Number see drawing	

Projection Height

F702	F70211B130G130S2
3,7 mm	5,1 mm

Plunger Tip Style, Material, Finish and Tip Diameter



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Feinmetall](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#) [R921934000](#)
[R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#) [108-1000-106](#)
[108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#)
[BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R644543022](#) [R948142000](#)