
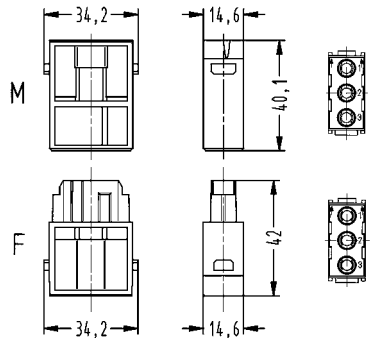

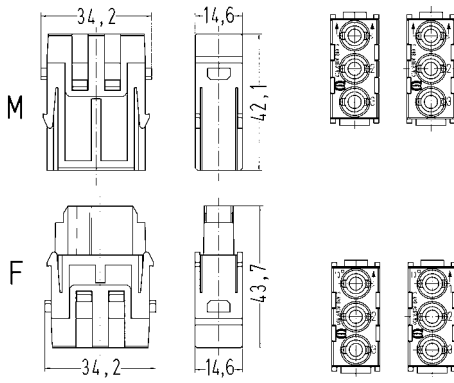

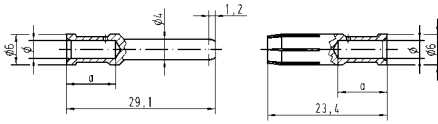


Number of contacts

# 3

690 V  
40 A

Han-Modular

Identification	Wire cross section (mm <sup>2</sup> )	Part number		Drawing Dimensions in mm																				
		male	female																					
Han-Modular®, Han® C module, Crimp terminal    Please order crimp contacts separately.		09 14 003 3001	09 14 003 3101	  Contact arrangement (view from termination side)																				
Han-Modular®, Han® C module, Axial screw terminal, silver plated contacts, contact resistance ≤0.3 mOhm  	2.5–8 6–10	09 14 003 2601 09 14 003 2602	09 14 003 2701 09 14 003 2702	  Stripping length <table border="1" data-bbox="1157 1523 1460 1579"> <tr> <td>mm<sup>2</sup></td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>mm</td> <td>5<sup>+1</sup></td> <td>5<sup>+1</sup></td> <td>8<sup>+1</sup></td> <td>11<sup>+1</sup></td> </tr> </table> Tightening torque <table border="1" data-bbox="1157 1601 1460 1657"> <tr> <td>mm<sup>2</sup></td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>Nm</td> <td>1,5</td> <td>1,5</td> <td>2</td> <td>2</td> </tr> </table>	mm <sup>2</sup>	2,5	4	6	10	mm	5 <sup>+1</sup>	5 <sup>+1</sup>	8 <sup>+1</sup>	11 <sup>+1</sup>	mm <sup>2</sup>	2,5	4	6	10	Nm	1,5	1,5	2	2
mm <sup>2</sup>	2,5	4	6	10																				
mm	5 <sup>+1</sup>	5 <sup>+1</sup>	8 <sup>+1</sup>	11 <sup>+1</sup>																				
mm <sup>2</sup>	2,5	4	6	10																				
Nm	1,5	1,5	2	2																				
Han® C, Crimp contact, silver plated contacts, contact resistance ≤1 mOhm  	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	  <table border="1" data-bbox="1005 1870 1460 2004"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm<sup>2</sup> AWG 16</td> <td>1.75</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm<sup>2</sup> AWG 14</td> <td>2.25</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm<sup>2</sup> AWG 12</td> <td>2.85</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm<sup>2</sup> AWG 10</td> <td>3.5</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm<sup>2</sup> AWG 8</td> <td>4.3</td> <td>12 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	1.5 mm <sup>2</sup> AWG 16	1.75	9.5 mm	2.5 mm <sup>2</sup> AWG 14	2.25	9.5 mm	4 mm <sup>2</sup> AWG 12	2.85	9.5 mm	6 mm <sup>2</sup> AWG 10	3.5	9.5 mm	10 mm <sup>2</sup> AWG 8	4.3	12 mm		
Wire gauge	∅	Stripping length																						
1.5 mm <sup>2</sup> AWG 16	1.75	9.5 mm																						
2.5 mm <sup>2</sup> AWG 14	2.25	9.5 mm																						
4 mm <sup>2</sup> AWG 12	2.85	9.5 mm																						
6 mm <sup>2</sup> AWG 10	3.5	9.5 mm																						
10 mm <sup>2</sup> AWG 8	4.3	12 mm																						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)