

Green-Cap (ELECTRIC DOUBLE LAYER CAPACITORS)



DS Radial Type, Standard Series


- Endurance : 2.5V 70°C 1000 hours, 2.7V 60°C 1000 hours
- The small size and high capacitance, low resistance
- Can be charge and discharge more times than secondary batteries
- OEM product



Item	Characteristics	
Operating temperature range	-25 ~ +70°C	-40 ~ +60°C
Rated Voltage	2.5 VDC	2.7 VDC
Capacitance tolerance	-20 ~ +20%	
Temperature characteristics	Capacitance change Internal resistance	Within ±5% of initial value at +20°C Within 150% of initial value at +20°C
Endurance (2.5V:70°C, 2.7V:60°C)	Test time Capacitance change Internal resistance	1000 hours Within ±30% of initial specified value Less than 100% of initial specified value
Shelf life (2.5V:70°C, 2.7V:60°C)	After 1000 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) ΔCl < 30% and ΔESR < 200% of initially specified value, respectively and LC < specified value
Cycle Life (25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

DRAWING

Unit : mm

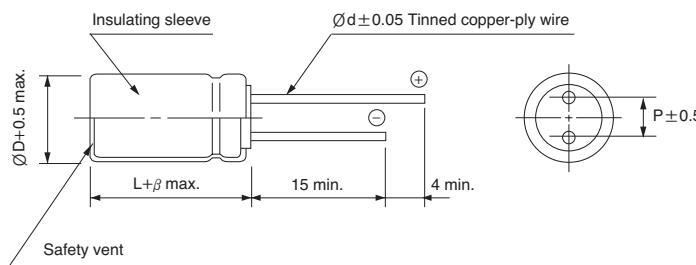

ØD	8	10	16	18
P	3.5	5	7.5	7.5
Ød	0.6	0.6	0.8	0.8
β	1.5		2.0	

CHARACTERISTIC LIST & DIMENSIONS

Rated Voltage	Capacitance (F)	ESR, 1KHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy		Specific Power		Weight (g)	Volume (ml)	Dimension ØD×L(mm)
					(Wh/kg)	(Wh/L)	(W/kg)	(W/L)			
2.5	3	140	350	0.008	1.63	2.59	1,339	2,132	1.6	1.0	8 × 20
	5	110	250	0.013	1.97	2.76	1,364	1,910	2.2	1.6	10 × 20
	10	65	120	0.025	2.48	3.68	1,786	2,653	3.5	2.4	10 × 30
	25	35	65	0.063	2.89	4.32	1,538	2,296	7.5	5.0	16 × 25
	60	20	30	0.150	3.77	5.12	1,812	2,456	13.8	10.2	18 × 40
2.7	3	60	90	0.008	2.17	3.02	6,943	9,669	1.4	1.0	8 × 20
	5	50	70	0.014	2.41	3.22	5,951	7,956	2.1	1.6	10 × 20
	10	30	50	0.027	3.49	4.30	6,033	7,426	2.9	2.4	10 × 30
	25	20	35	0.068	3.78	5.04	3,730	4,972	6.7	5.0	16 × 25
	50	10	20	0.140	4.40	4.97	3,803	4,297	11.5	10.2	18 × 40

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Supercapacitors / Ultracapacitors category:

Click to view products by Samwha manufacturer:

Other Similar products are found below :

[DCK-3R3E224U-E](#) [BZ12GA154ZHB](#) [BZ195B273ZNBDM](#) [C-TEC2403-1](#) [CEM2](#) [KW-5R5C105H-R](#) [KW-5R5C224H-R](#) [KR-5R5C105H-R](#)
[DBJ-5R5D105T](#) [DXJ-5R5H334U](#) [DSK-3R3H703T414-HRL](#) [DHL-5R5D224GT](#) [LX055105A](#) [LT055105A](#) [SCCY73B407SLBLE](#)
[VPF127M3R8](#) [VPF706M3R8](#) [VMF706M3R8](#) [VMF506M3R8](#) [VPF506M3R8](#) [VMF306M3R8](#) [VPF227M3R8](#) [VMF227M3R8](#) [VMF127M3R8](#)
[DB5U207M30045HA](#) [DH5U128W60074TH](#) [DRE10/2.5](#) [DRL106S0TI25RRDAP](#) [DRL226S0TK25RR](#) [106DCN2R7M](#) [SCCR20B335SRB](#)
[SCCS30B106SRB](#) [SCCT30B156SRB](#) [SCCU30B306MRB](#) [SCCW45B107VSB](#) [SCMR14C474MSBA0](#) [SCMR22C155MRBA0](#)
[SCMR22C155MSBA0](#) [SCMS22C255MRBA0](#) [SCMT22C505MRBA0](#) [SCMT32C755MRBA0](#) [DRL475S0TG20RRDAP](#) [FT0H225ZF](#)
[FCS0H224ZFTBR24](#) [FR0H473ZF](#) [GS206F](#) [DS5U506M18040BB](#) [SCCV40B506MRB](#) [NEXT474Z5.5V16.5X13F](#) [DBJ-5R5D224T](#)