



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE245 (NPN) & NTE246 (PNP) Silicon Complementary Transistors Darlington Power Amplifier

Description:

The NTE245 (NPN) and NTE246 (PNP) are silicon complementary Darlington transistors in a TO3 type case designed for use as output devices in general purpose amplifier applications.

Features:

- High DC Current Gain: $h_{FE} = 4000$ Typ @ $I_C = 5A$
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	80V
Collector-Base Voltage, V_{CB}	80V
Emitter-Base Voltage, V_{EB}	5V
Collector Current, I_C	10A
Base Current, I_B	200mA
Total Power Dissipation ($T_C = +25^\circ C$), P_D	150W
Derate Above $25^\circ C$	0.857W/ $^\circ C$
Operating Junction Temperature Range, T_J	-55° to $+200^\circ C$
Storage Temperature Range, T_{stg}	-55° to $+200^\circ C$
Thermal Resistance, Junction-to-Case, R_{thJC}	1.17 $^\circ C/W$

Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 100mA, I_B = 0$, Note 1	80	-	-	V
Collector-Emitter Leakage Current	I_{CEO}	$V_{CE} = 40V, I_B = 0$	-	-	1.0	mA
		$V_{EB} = 80V, R_{BE} = 1k\Omega$	-	-	1.0	mA
	$V_{EB} = 80V, R_{BE} = 1k\Omega, T_C = +150^\circ C$	-	-	5.0	mA	
Emitter Cutoff Current	I_{EBO}	$V_{BE} = 5V, I_C = 0$	-	-	2.0	mA

Note 1. Pulse Test: Pulse Width = 300 μs , Duty Cycle = 2%

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 1)						
DC Current Gain	h_{FE}	$V_{CE} = 3\text{V}, I_C = 5\text{A}$	1000	—	—	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 5\text{A}, I_B = 20\text{mA}$	—	—	2.0	V
		$I_C = 10\text{A}, I_B = 50\text{mA}$	—	—	4.0	V
Base–Emitter Voltage	V_{BE}	$V_{CE} = 3\text{V}, I_C = 5\text{A}$	—	—	3.0	V

Note 1. Pulse Test: Pulse Width = $300\mu\text{s}$, Duty Cycle = 2%

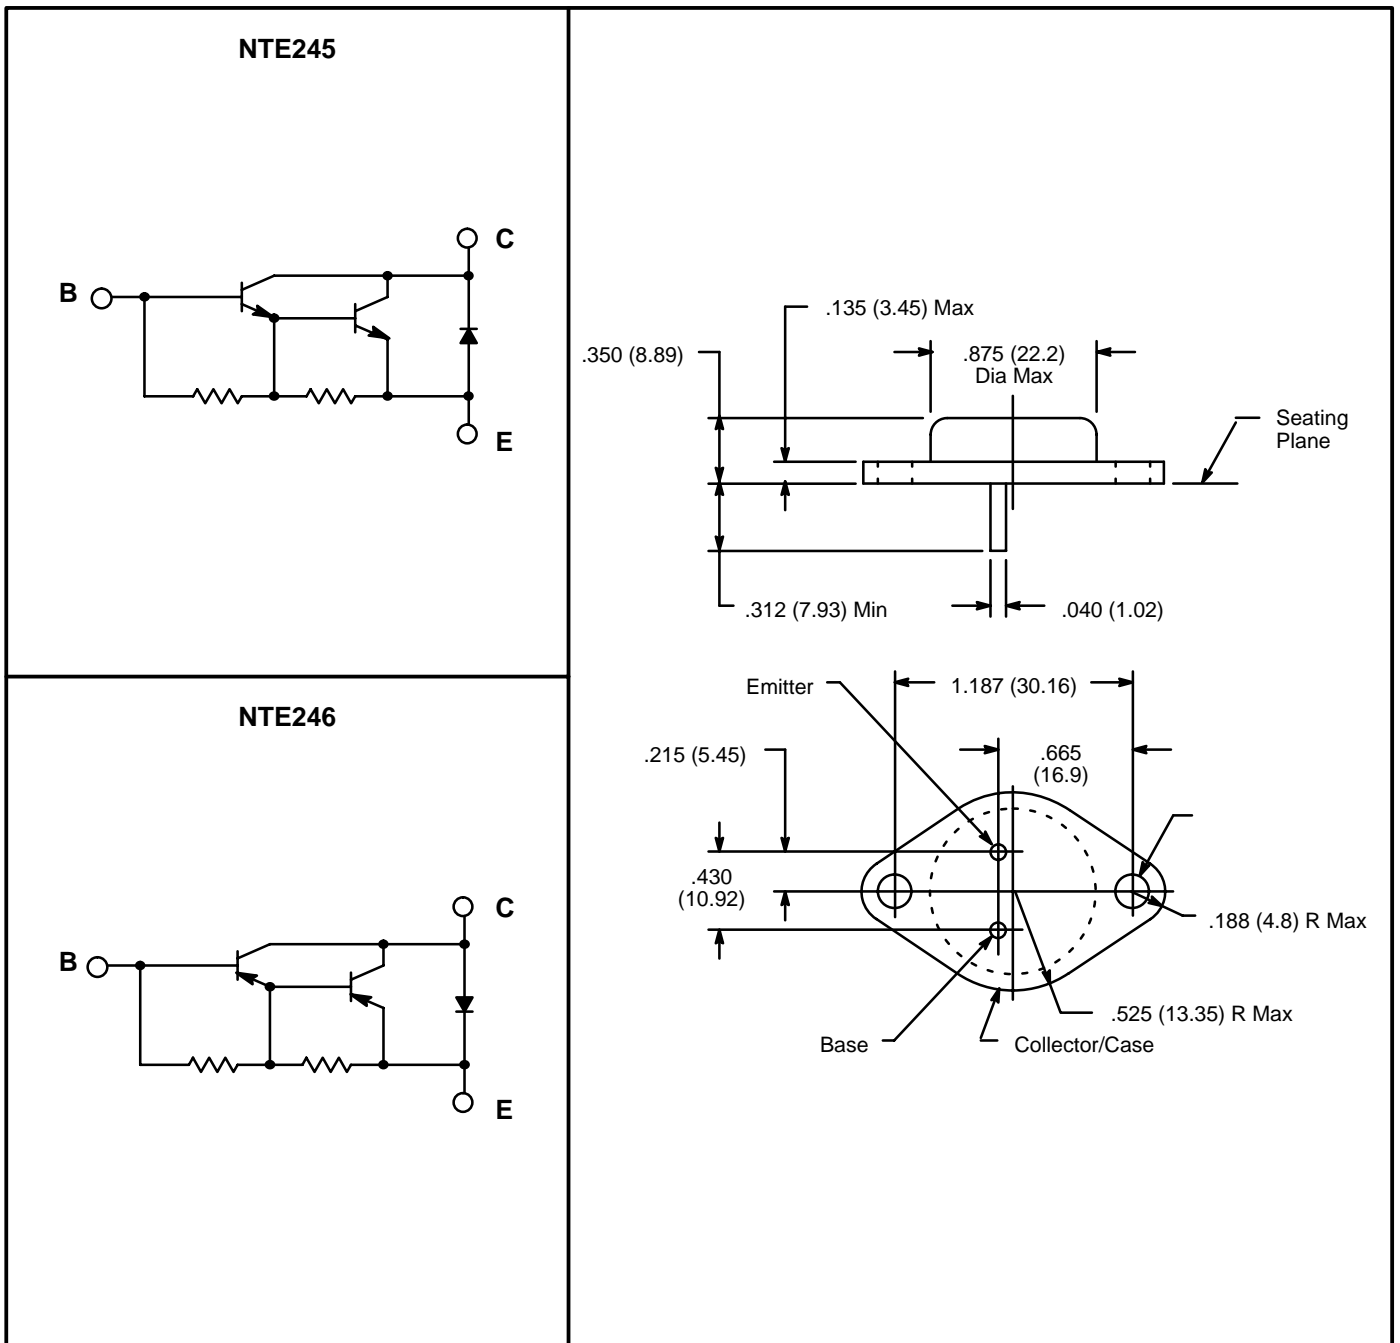

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-](#)
[TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPSA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)