
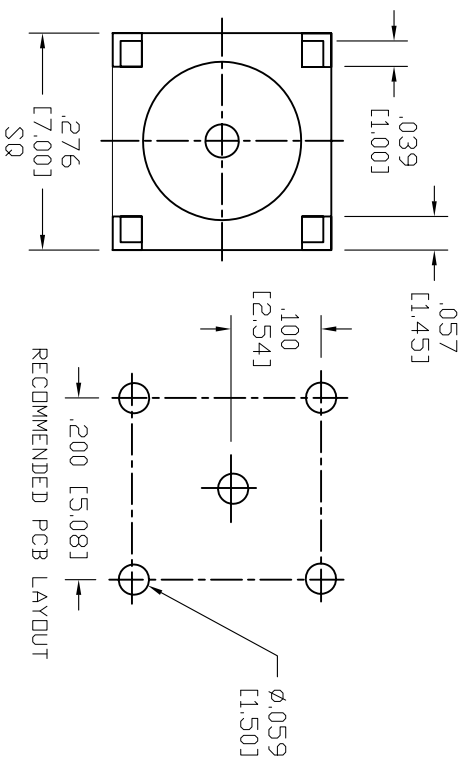


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9114	RELEASED	11/04/08	
A	9114	REDRAWN	10/18/12	
B		REVISED PIN MATERIAL	8/13/13	

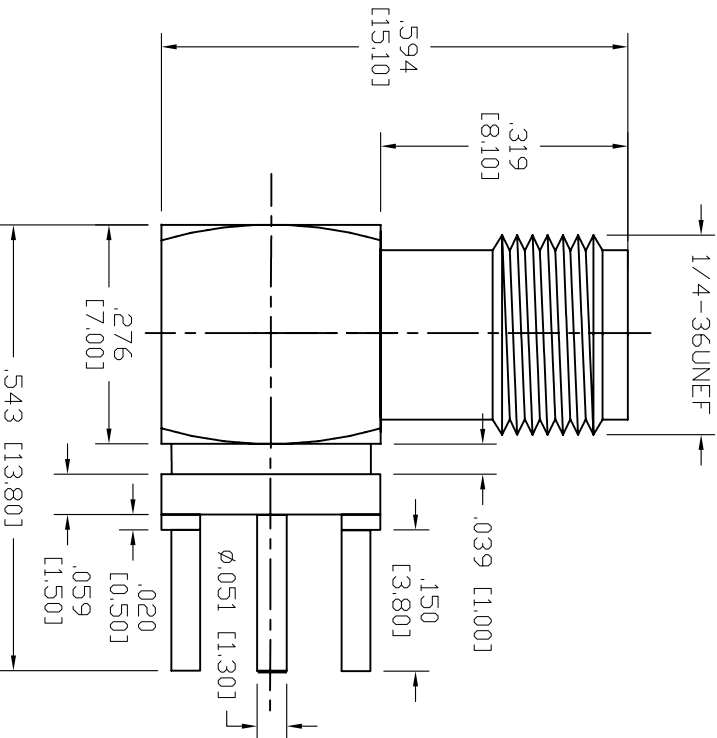

DESCRIPTION	MATERIAL	QTY	FINISH
CHASDISIS	BRASS	1	GOLD
INSULATOR B	TEFLON	1	NONE
PIN	BRASS	1	GOLD
INSULATOR A	TEFLON	1	NONE
WASHER	BRASS	1	GOLD
BODY	BRASS	1	GOLD

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SMA JACK R/A PCB MOUNT, FEMALE PIN

SPECIFICATIONS:

- Electrical:
 Frequency range: 0-18 GHz
 Working Voltage: 250 VRMS max.
 Dielectric Withstanding Voltage: 750 VRMS max.
 Contact Resistance: 6 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
- Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XXX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS	DATE
DRAWN DY	11/04/08
CHECKED	
APPROVED	

TITLE	SMA JACK R/A PCB MOUNT, FEMALE PIN	
SIZE	PART NO.	REV.
X	RF2-03-1-00-50-G	B
REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series](#) category:

Click to view products by [Adam](#) manufacturer:

Other Similar products are found below :

[R191203007](#) [R191209000](#) [R191212000](#) [R191215000](#) [R191301000](#) [R191325000](#) [R191389200](#) [R191403000](#) [R191405000](#) [R191416000](#)
[R191419000](#) [R191421000](#) [R191424000](#) [R191445000](#) [R191511000](#) [R191552000](#) [R191720000](#) [R191722000](#) [R191733000](#) [R191759000](#)
[R191841001W](#) [R191911000](#) [R191912000](#) [R191968001W](#) [R192417010](#) [R921390000](#) [ADBJ20-E1-BJ379](#) [ADM2](#) [ADPL75-A1-PL75](#)
[ADPL75-E1-UBJ20](#) [9317505](#) [931RPBUFLP](#) [AD130](#) [ADBJ20-E1-PL74](#) [ADBJ20-E2-BJ79](#) [ADBJ77-A1PL3155](#) [ADBJ77-E1-UPL20](#)
[ADBJ77-E2-PL20](#) [242215](#) [242228](#) [CP-AD851](#) [R125680000W](#) [R191117000](#) [R191123000](#) [R191.147.000](#) [R191303000](#) [R191313000](#)
[R191315000](#) [R191316700](#) [R191327000](#)