



CONTACTOR SCREW TERMINALS,  
4NO FOR SNAPPING ONTO STANDARD MOUNTING RAIL  
DC OPERATION DC 24V

### General technical details:

<b>Operating current</b>		
• at AC-3 / at 400 V / rated value	A	8.4
• at AC-1 / at 400 V / rated value	A	20
<b>type of voltage</b>		DC
<b>Control supply voltage</b>		
• for DC / rated value		
• minimum	V	24
• maximum	V	24
<b>Service power / at AC-3 / at 400 V / rated value</b>	kW	4
<b>Number of poles</b>		4
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NC contacts / for auxiliary contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		4
<b>Number of NO contacts / for auxiliary contacts</b>		0
<b>Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</b>		K
<b>Item designation / according to DIN EN 61346-2</b>		K
<b>Protection class IP</b>		IP00
<b>Ambient temperature</b>		

- during operating

°C 55 ... -25

### Mechanical design:

#### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

#### Type of mounting

- series installation

screw and snap-on mounting onto 35 mm standard mounting rail

Yes

#### Width

mm 36

#### Height

mm 62

#### Depth

mm 60

### Certificates/approvals:

#### General Product Approval

#### Declaration of Conformity

#### Test Certificates



CCC



CSA



GOST



UL



EG-Konf.

[Special Test Certificate](#)

#### other

[Declaration of Conformity](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### CAX-Online-Generator


<http://www.siemens.com/cax>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TG1010-0BB4/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3TG1010-0BB4](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TG1010-0BB4)

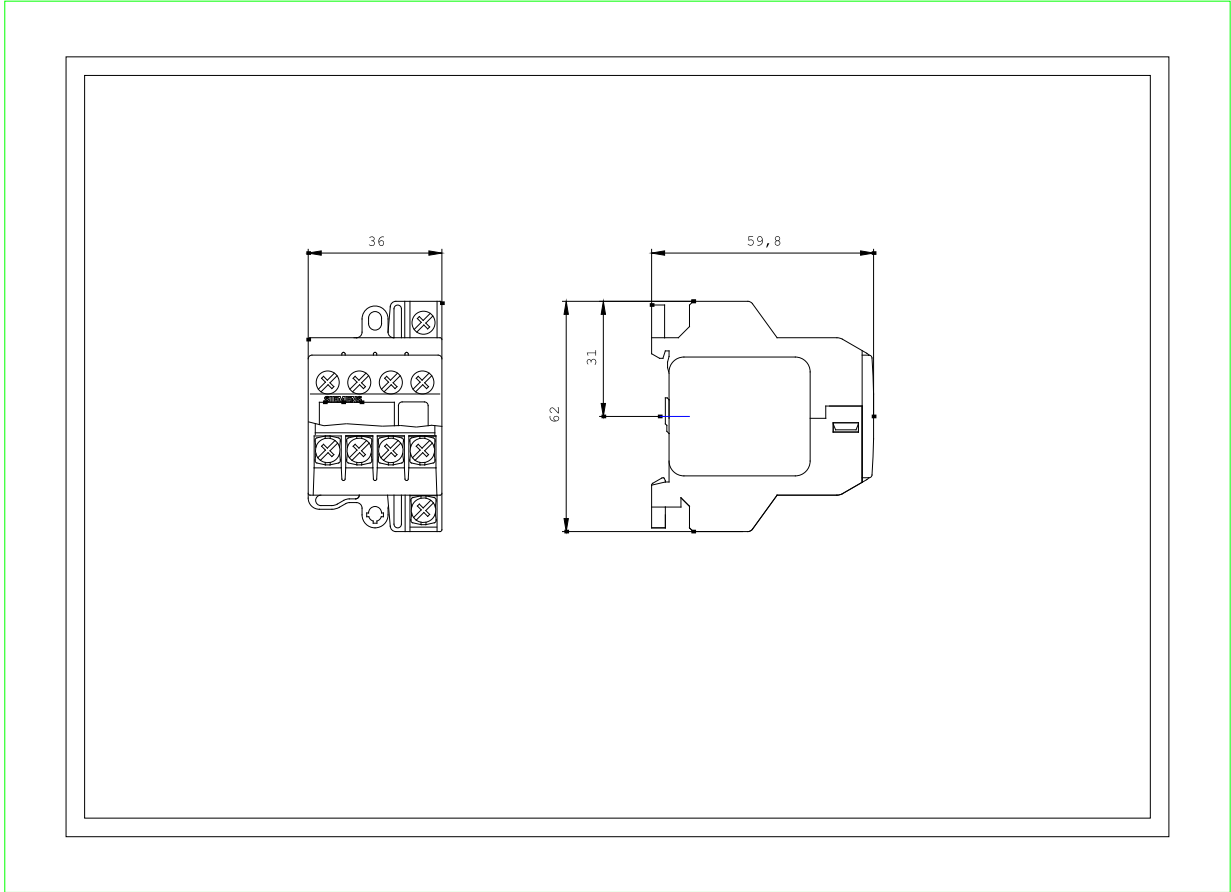

last change:

Jan 28, 2013

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [Siemens](#) manufacturer:*

Other Similar products are found below :

[6-1618400-7](#) [686-117111](#) [686-120111](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-410-138](#) [8-1618393-1](#) [GCA32A208VAC60HZ](#)  
[GCA32A220VAC50/60HZ](#) [GCA32A230VAC50/60HZ](#) [GCA32A240VAC50/60HZ](#) [GCA32A48VAC60HZ](#) [GCA63A120VAC50/60HZ](#)  
[GCA63A208VAC60HZ](#) [GCA63A220VAC60HZ](#) [GCA63A230VAC50/60HZ](#) [GCA63A240VAC50/60HZ](#) [GCA63A277VAC60HZ](#)  
[GCA63A48VAC60HZ](#) [GCA63A500VAC50/60HZ](#) [GCA63A600VAC60HZ](#) [GCA800A200VACDC](#) [GCA95A110VAC50/60HZ](#)  
[GCA95A120VAC50/60HZ](#) [GCA95A12VDC](#) [GCA95A240VAC50/60HZ](#) [GCA95A24VAC50/60HZ](#) [GCA95A48VAC60HZ](#) [ACC530U20](#)  
[ACC730U30](#) [1395832-1](#) [RM699BV-3011-85-1005](#) [RMIA210230AC](#) [RMIA45024AC](#) [1423675-8](#) [B07B032AC1-0329](#) [B329](#) [1617807-1](#)  
[N417](#) [P25-E5019-1](#) [P30C42A12D1-120](#) [2-1618398-1](#) [PBO-18A1218](#) [2307497](#) [RPYA00324LT](#) [RPYA003A120LT](#) [KR-4539-1](#)  
[RT334012WG](#) [S160156115](#)