


STATIC FILAMENT | LED STACK BEACON

BEACON

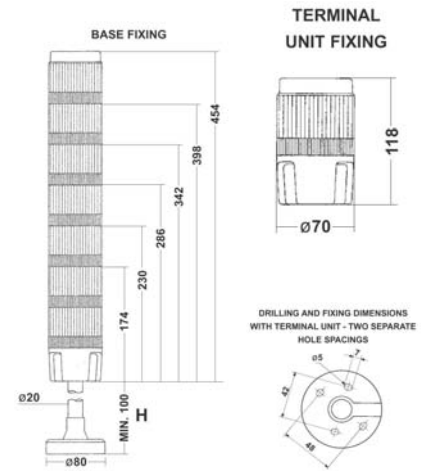

FILAMENT | LED Tower Light Series > Product overview

A simplistic but robust tower or stack light. The TLM range offers a steady signal. The units offer a choice of five lens colours plus sounder

module option. The lenses have been designed to accommodate a standard Ba15d lamp fitting or LED cluster. The modules offer easy assembly and provide an effective signal.

Features

- Steady signal
- Lamp determines voltage
- Sound module option
- Up to 7 module construction
- LED Cluster or Incandescent options
- Easy assembly

Material

UV Stable Polycarbonate Plastic

Code No:	Colour:	Voltage:	Light Source:
TLM-01	Amber	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-02	Red	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-03	Blue	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-04	Green	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-05	Clear	12-240v Ac/Dc	LED Cluster or Incandescent Type

TLM-AUD 24	Audible Buzzer	24v Ac/Dc	20mA	90dB @ 1 Metre
TLM-AUD 230	Audible Buzzer	230v Ac/Dc	20mA	90dB @ 1 Metre
TLM-BC	Mounting Cap & Base			
TLM-P100	Foot & Pole			

LED Lamps (24v Dc Ba15D)
M00267 Amber | M00268 Red | M00269 Green | M00270 Blue | M00271 Clear

LED Lamps (230v Ac Ba15D)
M00277 Amber | M00278 Red | M00279 Green | M00280 Blue | M00281 Clear



Kg 0.35 per module

°C -20+50

IP 54

ADD THE FOLLOWING LENS CODES TO THE PRODUCT CODE WHEN ORDERING

01 02 03 04 05

APPROVAL AND CONFORMITIES



EEC REGULATION 72/23 LOW VOLTAGE, EEC 94/68 | EN60947.5.1 | EN60073 | EN60068-2-6 | EN457 | EN981 | IEC536 | EEC REGULATION 89/336 ELECTROMAGNETIC COMPATIBILITY

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [Moflash Signalling](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)