



AC/DC 1000 V Ø 10 x 38 mm

 **usE180276**



Verpackungseinheit / Packing unit: 10 Stück / 10 pieces

Betriebsklasse / Class gR	UL 248-13
-------------------------------------	------------------

Bemessungs- spannung Rated Voltage	Artikel Nr. Article No	Größe Size	Bemessungsstrom Rated Current
V			A
AC/DC 1000	50 199 06	Ø 10 x 38 mm	0,5-16

Bemessungsausschaltvermögen / Rated breaking capacity 30 kA L/R = 1 ms

Bemessungsstrom Rated Current	Artikel Nr. Article No.	Gewicht Weight	Bemessungs- spannung Rated Voltage	Bemessungs- ausschalt- vermögen Rated breaking capacity @AC/DC 1000 V	Schmelzintegral Pre-Arcing- I ² t-Value	Ausschaltintegral Total I ² t-Value @ DC 1000 V L/R=5ms	Leistungsabgabe Power Loss
A		kg / 1	V	kA	A ² s	A ² s	W
0,5	50 199 06.0,5	0,01	1000	30	0,2	2,2	0,2
1	50 199 06.1	0,01	1000	30	0,45	2	0,3
2	50 199 06.2	0,01	1000	30	1,2	3	0,9
3,5	50 199 06.3,5	0,01	1000	30	5	27	1,8
4	50 199 06.4	0,01	1000	30	3	25	0,5
6	50 199 06.6	0,01	1000	30	5	40	0,7
8	50 199 06.8	0,01	1000	30	7	55	1,1
10	50 199 06.10	0,01	1000	30	10	77	1,5
11	50 199 06.11	0,01	1000	30	17	130	1,6
12	50 199 06.12	0,01	1000	30	20	155	1,6
15	50 199 06.15	0,01	1000	30	30	230	1,8
16	50 199 06.16	0,01	1000	30	30	230	2,1


Applikationskoeffizienten / Application coefficients (Weiterführende Informationen siehe Seite 13 / for more information see page 13)

a	A2	B1 max.	B2	CF3
150	0,6	1,25	0,5	0,8

AC/DC 1000 V Ø 10 x 38 mm

cULusE180276

Zeit/Strom-
Kennlinien
Time-current
characteristics

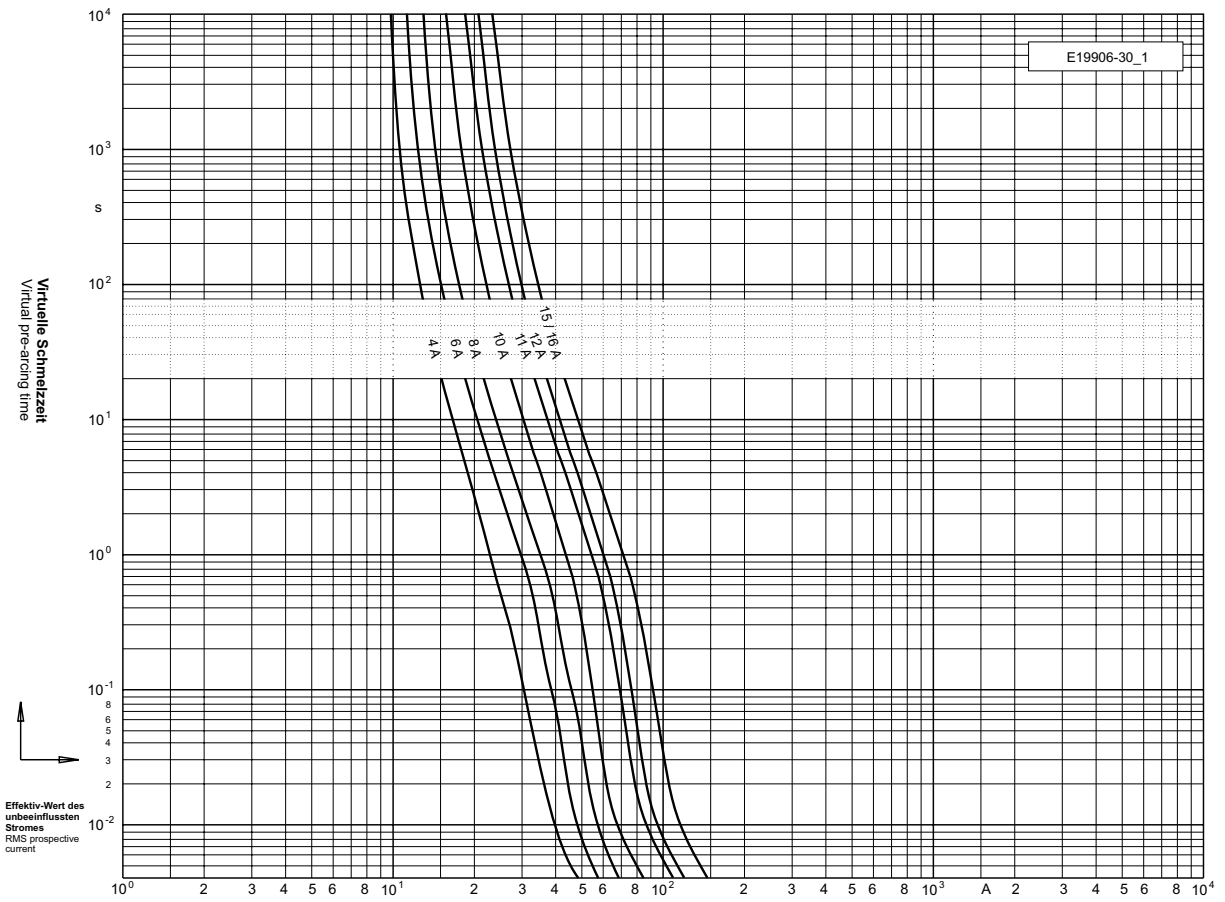

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [Siba](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)