


PRODUCT CODE: AYL4845

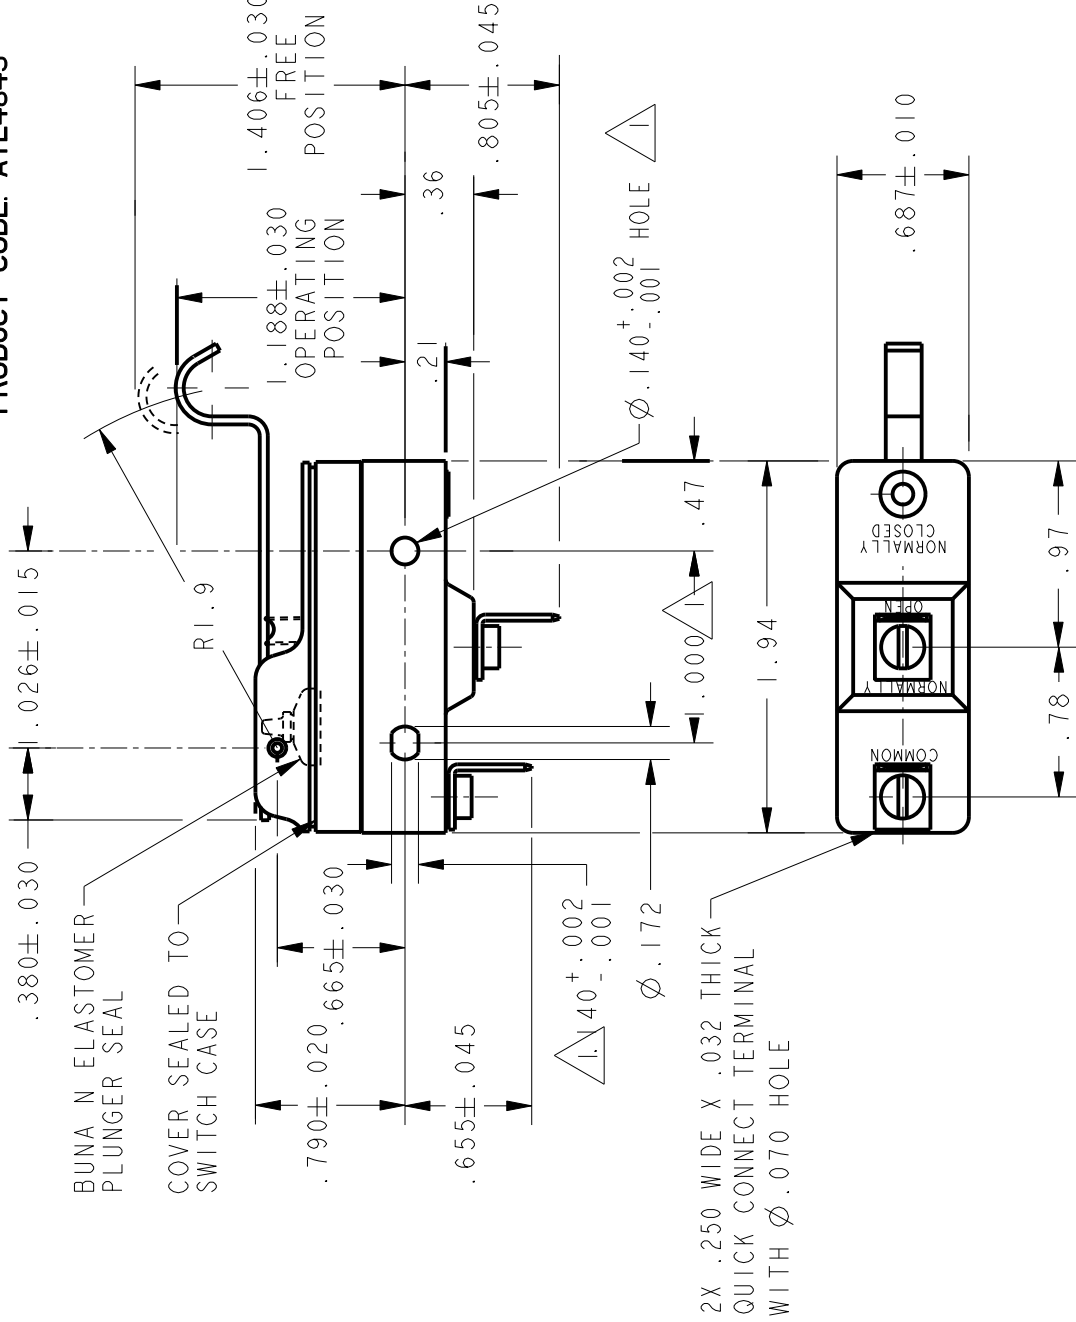

2X .250 WIDE X .032 THICK QUICK CONNECT TERMINAL WITH $\phi .070$ HOLE

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



SCALE	FULL	DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		\pm
WEIGHT	.076 LB	

ELECTRICAL DATA

CONTACT ARRANGEMENT	
S P N 0	
L22	1A 125 VAC
L288	
L307	
L315	
1A 250V T85 25E3	

CHARACTERISTICS

OPERATING FORCE	----- 3 1/2 OZ MAX
RELEASE FORCE	----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL	----- .004-.040
OVERTRAVEL	----- .156 MIN

REVISIONS	
A	200763
TSM	14JUL00
B	0016786
SPK	23NOV05

CHECK RJ

CHECK 14JUL00

CHECK SAV

CHECK 14JUL00

PTC/CAD 2D
DRAWN

TSM 14JUL00

ISSUE 4



CATALOG LISTING
YZ-2RW80725551-D6

PAGE 1 OF 1

RELEASE NO. PR-22459

REPLACES X100891-YZ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)