

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929

**ACTUATOR-SWITCH**

CATALOG LISTING

**8AS239**

CATALOG LISTING  
**8AS239**  
 PAGE 1 OF 1  
**M**  
 ISSUE **8**

RELEASE NO. PR-15555-T REPLACES

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

REVISIONS

A	PR-15555-T KEW 27 APR 87
B	CO-62079 GRT 16 JUL 87
C	CO-63383 TSK 26 APR 88
D	CO-67323A SAV 26 SEP 90
E	CO-70455 SAV 11 JUN 91
F	CO82984 DLT 17 MAY 96

DDM/CAD  
 DRAWN  
 KEW

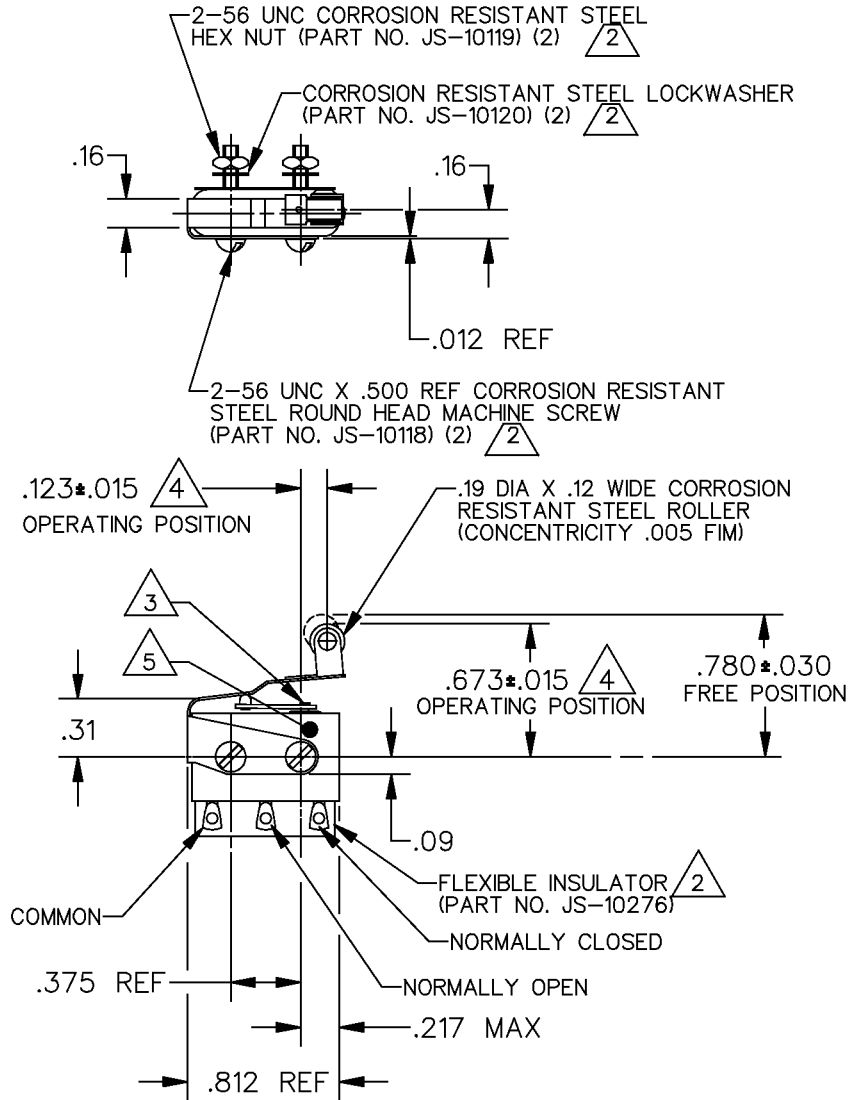


NOTES

- 1 - UNIT INCLUDES CATALOG LISTING 1HM19 BASIC SWITCH AND JS-176 TYPE ACTUATOR,
- $\triangle 2$  FURNISHED ASSEMBLED
- $\triangle 3$  ADJUSTMENT CAUTION: DO NOT ALLOW ACTUATOR LEAF TO COME IN CONTACT WITH FIXED END OF HM LEVER, SEAL DAMAGE MAY OCCUR
- $\triangle 4$  LEAF ACTUATOR ADJUSTED TO MEET SPECIFIED OPERATING POSITION PRIOR TO DELIVERY DISASSEMBLY, AND SUBSEQUENT REASSEMBLY MAY ALTER THIS CONDITION
- $\triangle 5$  SERIAL NUMBER TO BE VISIBLE THIS AREA PER HAMILTON STD. DRG. 786126

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE	FULL	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT S P D T			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OPERATING FORCE — — — — — 9 OZ MAX	SEA LEVEL			ONE PLACE	(.0)	$\pm$ .030
RELEASE FORCE — — — — — 2 OZ MIN	LOAD	70,000 FT		TWO PLACE	(.00)	$\pm$ .015
DIFFERENTIAL TRAVEL — — — .030 MAX	RESISTIVE	4 AMP	2 AMP	THREE PLACE	(.000)	$\pm$ .005
	INDUCTIVE	2 AMP	2 AMP	ANGLES		$\pm$
OVERTRAVEL — — — — — .030 MIN	LAMP	1 AMP	.5 AMP	WEIGHT		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [Honeywell](#) manufacturer:*

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)  
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)  
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)  
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)  
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)