


Compact Fan Kits

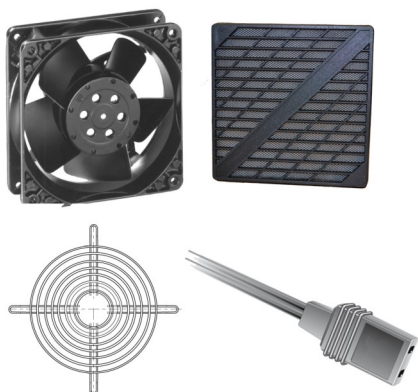

Kits incorporating a range of AC fans, a power lead and either a metal guard or an air filter option.

- 230V fans
- Can be operated at 50 or 60Hz
- Metal fan housings
- IP20 Protection
- Lead 610mm
- Filter pads that can be changed without switching off the fan

Part Number	Airflow		Noise	Bearings	Power	Speed	Temperature Range	Length	Width	Depth	Fan Type	Lead	Guard	Filter
	M3/h	CFM												
3956-KF0	59	34.7	35	BB	11.0	2650	-40...+80	92	92	38	3956	LZ120	LZ23K	-
3956-KF1	59	34.7	35	BB	11.0	2650	-40...+80	92	92	38	3956	LZ120	-	PMFA90
9956L-KF0	84	49.4	29	BB	9.5	1850	-40...+80	119	119	25	9956L	LZ120	LZ30K	-
9956L-KF1	84	49.4	29	BB	9.5	1850	-40...+80	119	119	25	9956L	LZ120	-	PMFA120T
9956-KF0	117	68.9	37	BB	14.0	2450	-40...+70	119	119	25	9956	LZ120	LZ30K	-
9956-KF1	117	68.9	37	BB	14.0	2450	-40...+70	119	119	25	9956	LZ120	-	PMFA120T
4890N-KF0	80	47.1	25	SB	11.0	1550	-10...+70	119	119	38	4890N	LZ120	LZ30K	-
4890N-KF1	80	47.1	25	SB	11.0	1550	-10...+70	119	119	38	4890N	LZ120	-	PMFA120T
4850N-KF0	100	58.9	32	SB	10.0	1800	-10...+70	119	119	38	4850N	LZ120	LZ30K	-
4850N-KF1	100	58.9	32	SB	10.0	1800	-10...+70	119	119	38	4850N	LZ120	-	PMFA120T
4650N-KF0	160	94.2	46	SB	19.0	2650	-10...+55	119	119	38	4650N	LZ120	LZ30K	-
4650N-KF1	160	94.2	46	SB	19.0	2650	-10...+55	119	119	38	4650N	LZ120	-	PMFA120T
4656N-KF0	160	94.2	47	BB	19.0	2650	-40...+85	119	119	38	4656N	LZ120	LZ30K	-
4656N-KF1	160	94.2	47	BB	19.0	2650	-40...+85	119	119	38	4656N	LZ120	-	PMFA120T
5656S-KF0	235	138.3	46	BB	30.0	2700	-35...+70	135	135	38	5656S	LZ120	LZ25	-



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ebm papst](#) manufacturer:

Other Similar products are found below :

[3312M](#) [4114N](#) [W1G200-EA95-68](#) [DV6248U](#) [5930-507](#) [6224NT](#) [M4Q045-CA03-75](#) [M4Q045-CF01-75](#) [M4Q045-DA05-01](#) [D2E133-DM27-D8](#) [8314S](#) [G2E108-AG63-01](#) [G2E140-AL30-48](#) [A2D200-AA02-16](#) [A2E200-AF02-02](#) [A4D350-AN08-02](#) [A4E330-AP18-13](#) [R1G225-AG15-11](#) [R2D220-AA24-13](#) [R2D270-AB12-09](#) [R2E220-AB08-12](#) [R3G310-AL09-30](#) [R4E225-AT15-10](#) [REF100-11/14](#) [RG90-18/14N](#) [9496-2-4039-1](#) [A2D240-AA02-10](#) [A2D250-AA06-52](#) [A2E300-AP02-01](#) [G2E120-FV56-16](#) [G2E160-AY47-57](#) [QR06A-2/106349](#) [R1G250-AQ21-52](#) [R2E180CH0312](#) [R2E225-BD92-36](#) [R3G175-AF25-02](#) [LZ27](#) [REF100-11/12](#) [RG125-19/12N/2](#) [RH31M-6/104372](#) [RH56M-6/204689](#) [RLF100-11/18](#) [D1G133-DC17-52](#) [D2E097-BI56-48](#) [55416.30320](#) [3314U](#) [K3G097-AK34-43](#) [D4E180-BA02-02](#) [4112NHH](#) [412FH-132](#)