
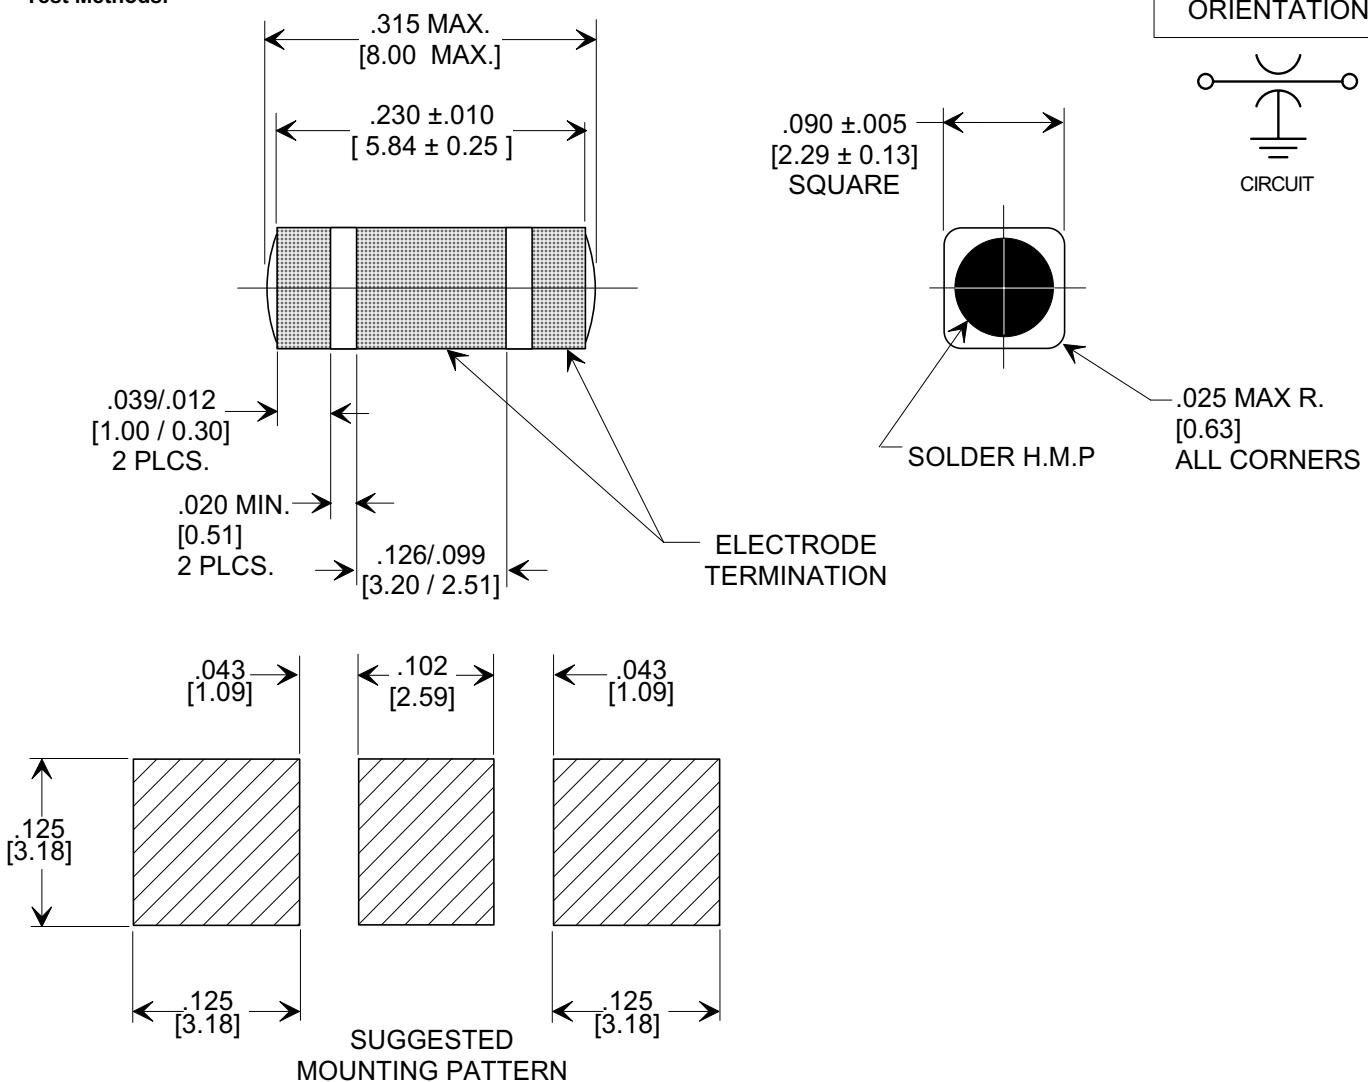



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC []



NOTES:

1. INDUCTANCE TO BE 0.1 H MINIMUM.
2. PACKAGE: BULK OR BLISTER TAPE TO IEC-60286-3 TYPE II AND EIA-481-A.
3. TUSONIX STANDARD PART NUMBER: 4702-005.
TUSONIX RoHS COMPLIANT PART NUMBER: 4702-005 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
4. ELECTRODE TERMINATION: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: MATTE TIN.
5. PART MARKING: STANDARD PART: NO MARKING. RoHS PART: LABELED ON PACKAGING ONLY.

CAP.	TOLERANCE	WVDC		TEST VOLTAGE	I.R. MIN. @ 100 (VDC.)	I _{DC}	ELECTRODE TERMINATION	TYPICAL NO LOAD INSERTION LOSS dB AT 25°C PER MIL-STD-220		
		85°C	125°C					10 MHZ	100 MHZ	1 GHZ
4000 pF	+80% / -20%	100	----	300 VDC	10 G	20 A	SOLDER	15	30	45
REVISION RECORD										
Original Release C.O.										
WAS SK8060-STYLE. S.M. 04-22-02	0									
20020418-4-11										
RELOCATED MOUNTING PATTERN L.E. 07-09-02										
20020709-2-06	1									
ADDED INSERTION LOSS COLUMN. S.M. 04-08-03		2								
20030407-1-06										
REVISED DRAWING. S.M. 06-23-03										
20030619-2-17	3									
INSERTION LOSS100 MHZ WAS 55 & 1 GHZ WAS 70. S.M. 11-29-04.										
20041129-2-01	4									
ADDED NOTES 3-5. S.M. 07-01-05										
20050629-1-04	5									
ANGLES ± //										
TUSONIX TUCSON, ARIZONA										
A										
4702-005										

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for tucsonix / cts manufacturer:

Other Similar products are found below :

[4100-000LF](#) [4601-003LF](#) [4305-001LF](#) [7606-602LF](#) [4404-003LF](#) [4310-017LF](#) [4101-001LF](#) [4400-680LF](#) [2499-003-X5W0-103Z](#) [4300-314-1](#)
[2499-003-X5W0-502PLF](#) [4300-314-2](#) [4403-039LF](#) [MXO45HS-2C-1M8432](#) [4200-005LF](#) [4203-003LF](#) [4700-009MLF](#) [4201-050LF](#) [4300-](#)
[681LF](#) [4201-502](#) [2425-001-X5U0-102AALF](#) [4601-000LF](#) [4306-019LF](#) [4601-010](#) [4300-013LF](#) [4600-050LF](#) [2499-003-X7R0-101MLF](#) [4204-](#)
[500](#) [752103103GP](#) [4601-501](#) [4702-005LF](#) [4305-005LF](#) [4400-034LF](#) [4400-010LF](#) [7606-501LF](#) [4209-053](#) [7603-501NLF](#) [2443-007-X5S0-](#)
[102MLF](#) [4600-054LF](#) [2499-003-X7W0-103ZLF](#) [4601-059](#) [4310-018LF](#) [4300-002LF](#) [4403-005](#) [4306-004LF](#) [4306-011LF](#) [4304-000LF](#)
[4400-089LF](#) [4600-067](#) [4601-052LF](#)