



T-3 1/4 Miniature Bayonet Base

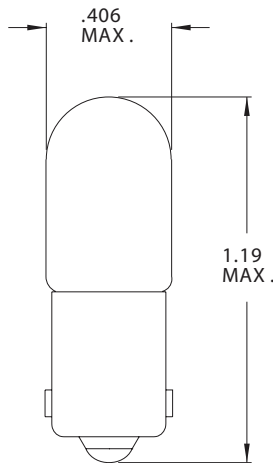

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1826	18.0	.15	1.8	250	C-2V
CM1437	24.0	.06	.90	20	C-2F
CM1818	24.0	.17	3.3	250	C-2V
CM313	28.0	.17	3.5	500	C-2F
CM757	28.0	.08	.62	7,500	C-2F
CM1819	28.0	.04	.34	2,500	C-2F
CM1820	28.0	.10	1.6	1,000	C-2F
CM1829	28.0	.07	1.0	1,000	C-2F
CM1843	28.0	.02	.20	3,000	C-2F
CM1864	28.0	.17	3.0	1,500	C-2F
CM1873	28.0	.20	3.0	7,000	C-2F
CM1822	36.0	.10	2.1	1,000	C-2F
CM1828	37.5	.05	.65	3,000	C-2F
CM1835	55.0	.05	1.1	5,000	C-5
CM8-3995	130.0	.02	.20	2,000	C-5
CM949	130.0	.022	.40	2,000	2CC-2F

T-3 1/4 Miniature Screw Base

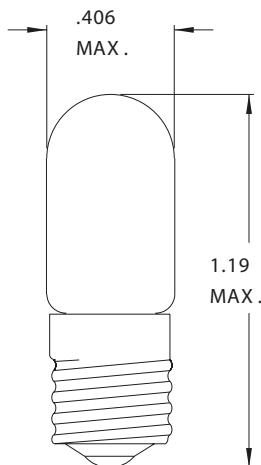

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1800	1.35	.06	.07	500	S-2
CM48	2.00	.06	.04	1000	S-2
CM41	2.50	.50	.50	3000	C-2R
CM42	3.20	.35	.50	3000	C-2R
CM40	6.30	.15	.50	3000	C-2R
CM46	6.30	.25	.90	3000	C-2R
CM1481	14.0	.15	1.5	200	C-2V
CM1487	14.0	.20	1.4	3000	C-2V
CM1821	28.0	.17	3.4	500	C-2F
CM1832	37.5	.05	.65	3000	C-2F
CM1823	48.0	.10	3.2	1000	C-2F
CM750	55.0	.05	.72	7500	C-13
CM8-3994	130.0	.02	.20	2000	C-5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [chicago miniature manufacturer](#):

Other Similar products are found below :

[7011X1/5-100](#) [93](#) [PR18](#) [13](#) [15](#) [1493](#) [1731](#) [1874](#) [2110QA2](#) [212-2](#) [2150QA4](#) [2191U7-24V](#) [2330D4](#) [248](#) [2620T1](#) [293](#) [2990D4-6V](#) [2990P3-6V](#) [301](#) [3015](#) [1680](#) [1705](#) [2150A2](#) [2158](#) [2191U5-6V](#) [GF660](#) [PLS13W/50](#) [24ES](#) [PR15](#) [2990D1-6V](#) [2990P1-12V](#) [2990P6-28V](#) [CMD11-21VGC-100](#) [CMD11-21VRC-100](#) [CMD53154](#) [CMD5452](#) [CMD55AB](#) [CMD5760](#) [303](#) [4302H1-5V](#) [455](#) [4610](#) [4745A](#) [5300A75](#) [5307H3](#)
[3122](#) [5635D1](#) [4106-W-19.25](#) [4300E11NF](#) [4327](#)