



SECTION 2 PCB TERMINAL BLOCKS


7.62mm Pitch **Standard Profile** Rising Clamp Terminal

Features

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 2.5mm² cable entry
-  , CE &  approved cUL applied for
- Guided pin alignment



Type No.	Poles	Length
CTB0118/2	2	15.24mm
CTB0118/3	3	22.86mm
CTB0118/4	4	30.48mm
CTB0118/5	5	38.10mm
CTB0118/6	6	45.72mm
CTB0118/7	7	53.34mm
CTB0118/8	8	60.96mm
CTB0118/9	9	68.58mm
CTB0118/10	10	76.20mm
CTB0118/11	11	83.82mm
CTB0118/12	12	91.44mm

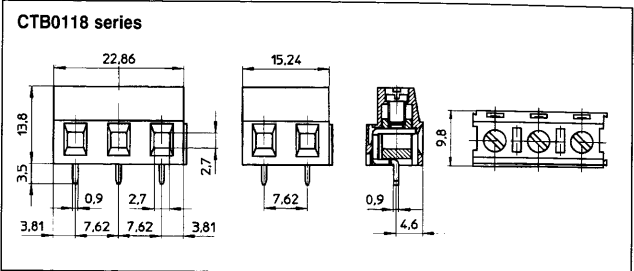

Specification


Rating	20A/750V
Dielectric strength	≥ 3kV/60sec
Insulation resistance	≥ 5MΩ
Working temperature	-20°C to 125°C
Short period	160°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	5μ tinned, nickel plated brass
Wire protect	Nickel plated brass
Screw/torque	M3 steel, 6μ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size	∅1.3mm

If you use

- Limit Switches
- Industrial Micro Switch
- Push Buttons
- Control Stations
- Control Boxes
- Key Switches
- Rotary Switches
- Joysticks
- Solenoid Switches

Please contact our sales desk and request our **Controls Catalogue** for all your industrial and control product requirements.

Tel: +44 (0)1727 864437
 Fax: +44 (0)1727 855400
sales@camden-electronics.co.uk
www.camden-electronics.co.uk

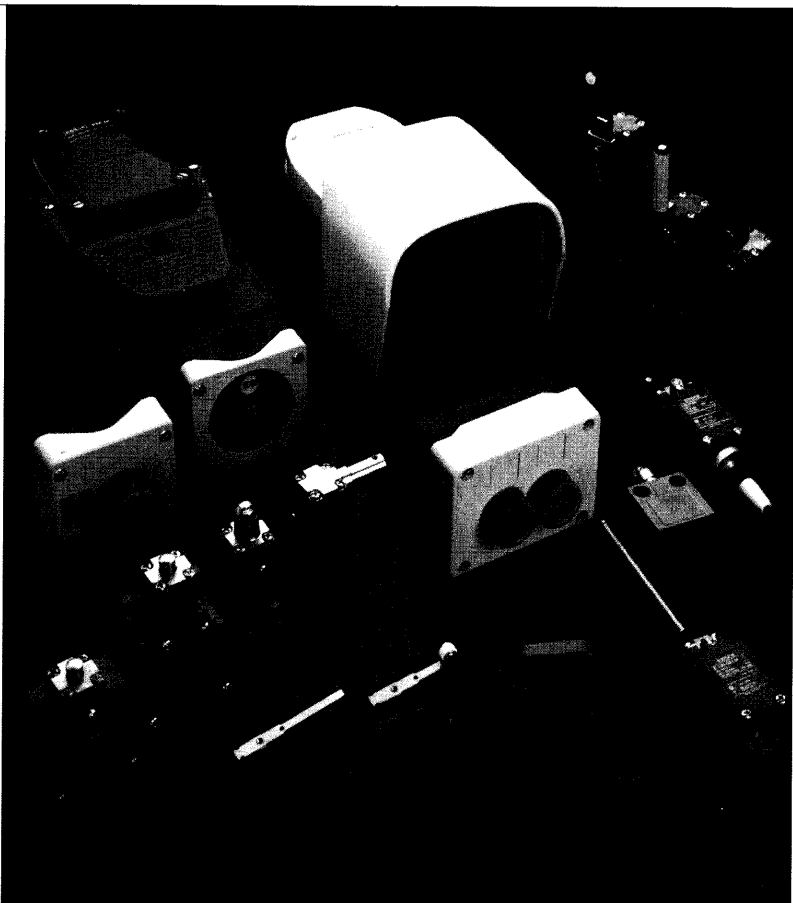

PCB TERMINAL BLOCKS
 FUSES & FUSE HOLDERS
 RELAYS
 BATTERIES
 LEDS
 PHOTOVOLTAIC CELLS
 PHOTOVOLTAIC CONTROLS
 PHOTOVOLTAIC SYSTEMS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92HE/10](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#)
[CE10.00.EI](#) [C192SHAND](#) [RTM5006/16-PAT](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#)
[CIM/15W-DMFS](#) [CHHBAT2GY](#) [CFTBN/2](#) [CCB2S1/04](#) [CHDX6-222C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#)
[CHDX811DD](#) [CCTTM40LR](#) [CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [IND513113-LED-RD](#)
[CE10.00.FM](#) [CBRPH-BLK](#) [RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#)
[CHH66C2GY](#) [CHH456PBK](#) [CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5004/14-NC-BLK](#) [RTM5006/16-NC-BLK](#)
[IND5032405-125-T/AMB](#)