


## Crystalview Moving Coil Meters

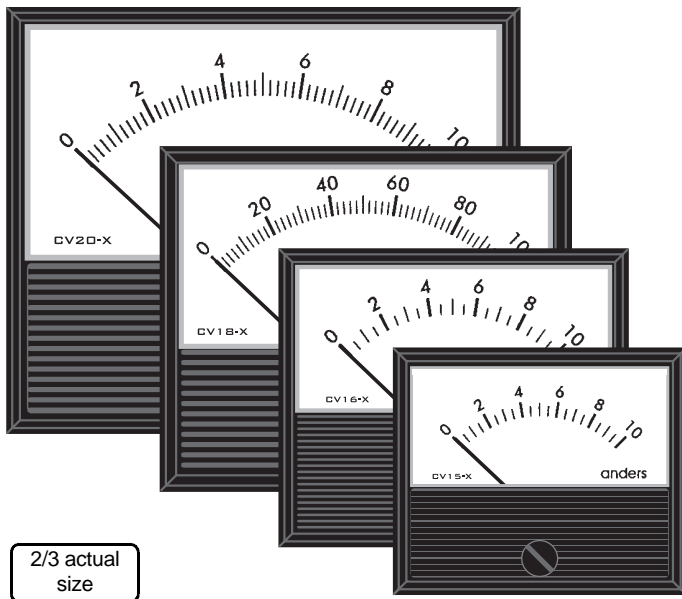


- Attractive and modern design
- Choice of printed scales
- 4 popular sizes
- "Easy-fit" scales
- Class 2.0

A modern and attractive range of quality dc moving coil meters available at very competitive prices.

There are 4 popular sizes which can be either surface or flush mounted behind the panel through a rectangular cutout. The meters utilise a well proven and robust, 90 degree deflection, pivot and jewel moving coil movement.

Meters are supplied in sensitivities of 100 microamps, 100-0-100 microamps (centre zero), 1 milliamps or as 4-20 milliamps (supressed zero) for signal process indication.

Pre-printed scales are available seperately graduated and numbered 0-10, 0-30, 0-100 and 100-0-100.

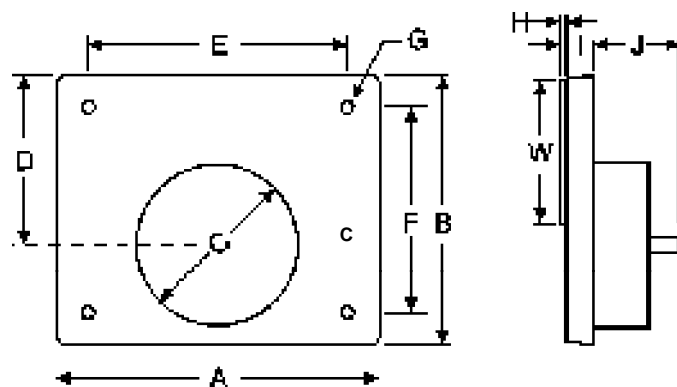

Fixing studs on all meters (Dimension G) are M3 x 12mm

Dimensions in mm

Model	A	B	C	D	E	F	H	I	J	W	Scale Length
CV-15X	57	48	43	24	40	35	1.5	14.5	28.5	50 x 23.5	40
CV-16X	68	58	45	31.5	48	48	1.5	14.5	28.5	61.5 x 28	50
CV-18X	80	67	50	38.5	64	48	1.5	14.5	28.5	72 x 35	63
CV-20X	100	83	50	51.5	80	64	1.5	14.5	28.5	92 x 45	78.5

Order Code	Size	Range	Rec. Price £:				
			1+	5+	10+	25+	50+
<b>METERS</b>							
CV15X1MA	CV-15X	0-1mA					
CV15X100UA	CV-15X	0-100µA					
CV15XCZ100UA	CV-15X	100-0-100µA					
CV15XSZ20MA	CV-15X	100-0-100µA					
CV16X1MA	CV-16X	0-1mA					
CV16X100UA	CV-16X	0-100µA					
CV16XCZ100UA	CV-16X	100-0-100µA					
CV16XSZ20MA	CV-16X	4-20mA					
CV18X1MA	CV-18X	0-1mA					
CV18X100UA	CV-18X	0-100µA					
CV18XCZ100UA	CV-18X	100-0-100µA					
CV18XSZ20MA	CV-18X	4-20mA					
CV20X1MA	CV-20X	0-1mA					
CV20X100UA	CV-20X	0-100µA					
CV20XCZ100UA	CV-20X	100-0-100µA					
CV20XSZ20MA	CV-20X	4-20mA					
<b>METER SCALES</b>							
S/CV15XB	CV-15X	Blank					
S/CV15X10	CV-15X	0-10					
S/CV15X30	CV-15X	0-30					
S/CV15X100	CV-15X	0-100					
S/CV15XCZ100	CV-15X	100-0-100					
S/CV16XB	CV-16X						
S/CV16X10	CV-16X	Blank					
S/CV16X30	CV-16X	0-30					
S/CV16X100	CV-16X	0-100					
S/CV16XCZ100	CV-16X	100-0-100					
S/CV18XB	CV-18X	Blank					
S/CV18X10	CV-18X	0-10					
S/CV18X30	CV-18X	0-30					
S/CV18X100	CV-18X	0-100					
S/CV18XCZ100	CV-18X	100-0-100					
S/CV20XB	CV-20X	Blank					
S/CV20X10	CV-20X	0-10					
S/CV20X30	CV-20X	0-30					
S/CV20X100	CV-20X	0-100					
S/CV20XCZ100	CV-20X	100-0-100					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [anderson power products](#) manufacturer:*

Other Similar products are found below :

[1310G2](#) [160-1050](#) [2002G3KIT](#) [2005G3KIT](#) [PMHPAM14P03](#) [2-7251G2](#) [2-8703P4](#) [6329G5](#) [6379G2](#) [SK6-A95H03PS04-A29](#) [TL0002](#)  
[6322G1](#) [SK1-050B04PS01-B03](#) [TD0102](#) [TE0102](#) [TD0104](#) [SK2-050B040000-B01](#) [E80-31](#) [80-1125](#) [6339](#) [2-7249G3](#) [115G8](#)  
[SBE80CLPRED-BK](#) [1322G9](#) [E80-20](#) [PM1000G1](#) [PMHPAF11](#) [PMHPAF14](#) [1388G7](#) [1388G4](#) [1389G9](#) [E6374G1](#) [A320H-MK](#) [2005G1KIT](#)  
[PMHPBM15P01](#) [114360G1](#) [E32470-0008](#) [6374G1](#) [1310G4](#) [1396G1](#) [TL0003](#) [PM1003GX](#) [TA0003](#) [SK6-076D05](#) [2035G3](#) [80-1110](#) [80-1016](#)  
[2-7249G6](#) [1389G8](#) [1388G8](#)