



### Description

- Microcomputer Compensated Crystal Oscillator with voltage control (MCXO)
- Model IQMT-100-3-B
- Model Issue number 1

### Frequency Parameters

- Frequency 10.0MHz
- Frequency Tolerance @ 25°C ±0.50ppm
- Frequency Stability ±0.05ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing ±0.02ppm max per day, ±0.5ppm max per year
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC=1.65V and load=15pF): ±0.1ppm max
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and load=15pF): ±0.1ppm max
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and within 30 days after ex-works)
- Short Term Stability (@ 25°C after 10mins power on): 2E-10/s typ @ 10MHz
- Frequency Stability: TA varied from -40°C to 85°C, measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V, load=15pF and temperature variable speed less than 2°C per minute.
- Ageing: TA=25°C, Vs=3.3V, VC=1.65V and after 1hr of operation.

### Electrical Parameters

- Supply Voltage 3.3V
- Supply Voltage Tolerance ±5%
- Current Draw 10.00mA max
- Current: TA=25°C, Vs=3.3V, VC=1.65V and load=15pF

### Frequency Adjustment


- Pulling ±10ppm to ±15ppm
- Control Voltage Details 1.65V ±1.65V
- Linearity: ±10% max
- Input Impedance: 100kΩ min
- Slope: Positive

### Output Details


- Output Compatability HCMOS
- Output Load 15pF
- Rise and Fall time (10% - 90%) 8ns max
- Duty Cycle 45/55%
- Output Low (@ Vs=3.3V, load=15pF): 0.4V max
- Output High (@ Vs=3.3V, load=15pF): 2.4V min

### Noise Parameters


- Phase Noise (@ 10MHz typ):
  - 90dBc/Hz @ 10Hz
  - 115dBc/Hz @ 100Hz
  - 135dBc/Hz @ 1kHz
  - 145dBc/Hz @ 10kHz
  - 148dBc/Hz @ 100kHz
  - 150dBc/Hz @ 1MHz

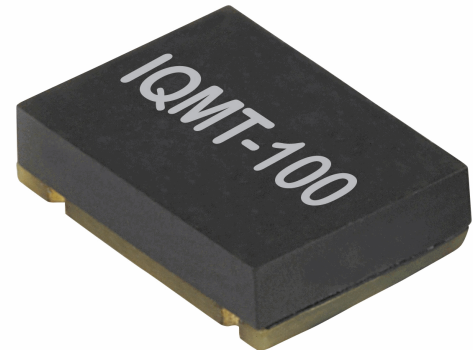

### Outline (mm)

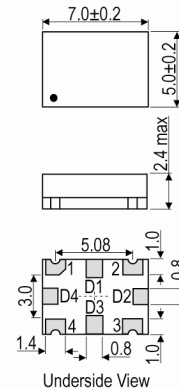

- Pad Connections
- Voltage Control
  - GND
  - Output
  - +Vs
- D1, D2, D3, D4. N/C



### Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18

USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [iqd manufacturer](#):*

Other Similar products are found below :

[LFX TAL071761CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063802BULK](#) [LFOCXO063809BULK](#)  
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO070028Cutt](#) [LFTVXO063701BULK](#)  
[LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFX TAL003156](#) [LFMCXO063766BULK](#)  
[LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#) [LFTCXO063716BULK](#)  
[LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#) [LFTVXO063790BULK](#) [LFX TAL003113](#)  
[LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [LFSPXO009686Bulk](#) [LFRBXO059244Bulk](#) [LFTVXO075802Cutt](#)  
[LFOCXO067293Bulk](#) [LFTCXO075792Cutt](#) [LFMCXO064079BULK](#) [LFSPXO071189](#) [LFOCXO067293](#) [LFX TAL012312BULK](#)  
[LFTCXO063780BULK](#) [LFSPXO056269CUTT](#) [LFOCXO063803BULK](#) [LFSPXO009592CUTT](#) [LFOCXO065520Bulk](#) [LFMISC070550Bulk](#)  
[LFSPXO025494Cutt](#) [LFMCXO064080BULK](#) [LFOCXO063804BULK](#) [LFSPXO019884BULK](#)