



### Description

- Temperature compensated voltage controlled crystal oscillator (TCVCXO)
- Model: IQXT-200-4-B
- Model Issue number: 1

### Frequency Parameters

- Frequency: 12.80MHz
- Frequency Tolerance @ 25°C: ±0.50ppm
- Frequency Stability: ±0.28ppm
- Operating Temperature Range: -20.00 to 70.00°C
- Ageing: ±0.02ppm max per day, ±1ppm max per year
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC=1.65V and load=10kΩ//10pF): ±0.1ppm max
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and load=10kΩ//10pF): ±0.1ppm max
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and within 30 days after ex-works): ±0.5ppm
- Short Term Stability (@ 25°C after 10mins power on): 5E-10/s typ @ 10MHz
- Frequency Stability: TA varied from -20°C to 70°C, measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V, load=10kΩ//10pF and temperature variable speed less than 2°C per minute.
- Ageing: TA=25°C, Vs= 3.3V, VC=1.65V and after 1hr of operation.

### Electrical Parameters

- Supply Voltage: 3.3V
- Supply Voltage Tolerance: ±5%
- Current Draw: 10.00mA max
- Current: TA=25°C, Vs=3.3V, VC=1.65V and load=10kΩ//10pF

### Frequency Adjustment


- Pulling: ±10ppm to ±15ppm
- Control Voltage Details: 1.65V ±1.65V
- Linearity: ±10% max
- Input Impedance: 100kΩ min
- Slope: Positive

### Output Details


- Output Compatibility: Clipped Sine
- Output Load: 10kΩ//10pF
- Output Level: 0.8V pk-pk min

### Noise Parameters


- Phase Noise (@ 10MHz typ):
  - 90dBc/Hz @ 10Hz
  - 115dBc/Hz @ 100Hz
  - 135dBc/Hz @ 1kHz
  - 145dBc/Hz @ 10kHz
  - 148dBc/Hz @ 100kHz
  - 150dBc/Hz @ 1MHz

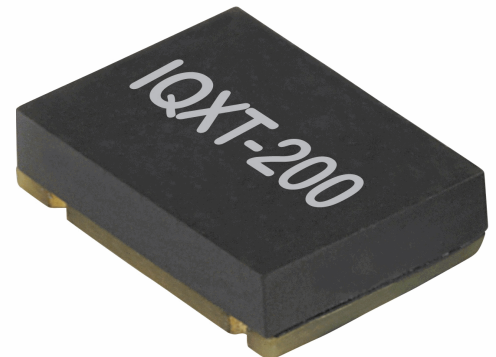

### Outline (mm)

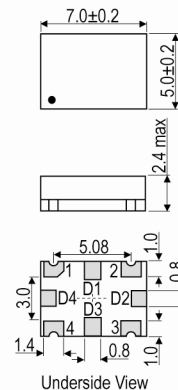

- Pad Connections
- Voltage Control
  - GND
  - Output
  - +Vs
- D1, D2, D3, D4. N/C



### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: +49 (0)7264 9145-62

France: +33 (0)5 34 50 91 18  
USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [iqd manufacturer](#):*

Other Similar products are found below :

[LFXTAL071761CUTT](#) [LPMC XO063767BULK](#) [LPMC XO063773BULK](#) [LFOC XO063802BULK](#) [LFOC XO063809BULK](#)  
[LFTC XO063709BULK](#) [LFTC XO063710BULK](#) [LFTC XO063779BULK](#) [LFTC XO070028Cutt](#) [LFTV XO063701BULK](#)  
[LFTV XO063702BULK](#) [LFTV XO063703BULK](#) [LFTV XO063707BULK](#) [LFTV XO063791BULK](#) [LF XTAL003156](#) [LPMC XO063766BULK](#)  
[LPMC XO063771BULK](#) [LFOC XO063816BULK](#) [LFTC XO063713BULK](#) [LFTC XO063714BULK](#) [LFTC XO063716BULK](#)  
[LFTV XO063704BULK](#) [LFTV XO063705BULK](#) [LFTV XO063706BULK](#) [LFTV XO063789BULK](#) [LFTV XO063790BULK](#) [LF XTAL003113](#)  
[LFOC XO063809](#) [LFSP XO009581](#) [LFTC XO063784](#) [LFTV XO063786](#) [LFSP XO009686Bulk](#) [LFRB XO059244Bulk](#) [LFTV XO075802Cutt](#)  
[LFOC XO067293Bulk](#) [LFTC XO075792Cutt](#) [LPMC XO064079BULK](#) [LFSP XO071189](#) [LFOC XO067293](#) [LFXTAL012312BULK](#)  
[LFTC XO063780BULK](#) [LFSP XO056269CUTT](#) [LFOC XO063803BULK](#) [LFSP XO009592CUTT](#) [LFOC XO065520Bulk](#) [LFMISC070550Bulk](#)  
[LFSP XO025494Cutt](#) [LPMC XO064080BULK](#) [LFOC XO063804BULK](#) [LFSP XO019884BULK](#)