

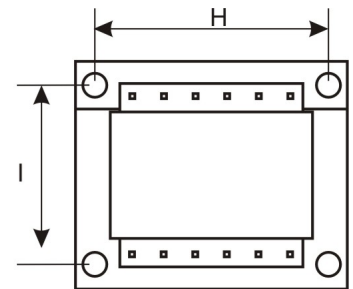






### Features:

- Made in the UK
- Input Voltage 230V or 115V
- Power: 3 ~ 36 VA 50/60Hz
- High Quality PCB Transformer
- UL94-V0 Materials
- Isolated Primary/Secondary windings
- Temperature Class: - Class B (130°C)
- Dielectric Strength: 4200Vrms
- Manufactured and tested in accordance to EN61558, EN60950, CE

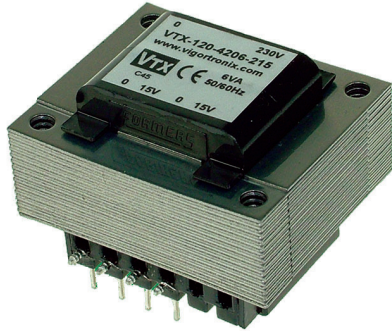


Unused Pins will be omitted from standard parts.

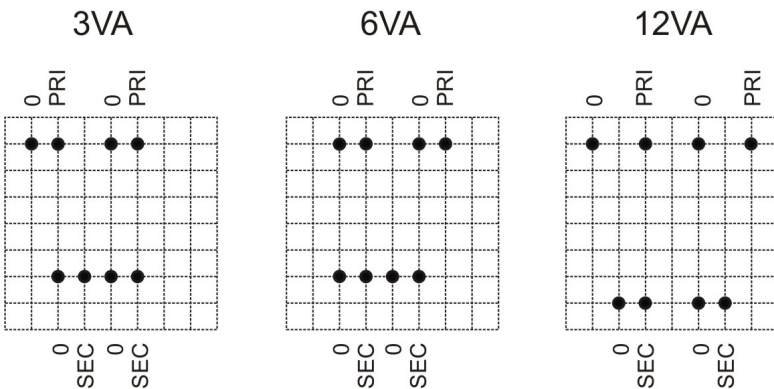

Single Primary winding uses the two outer pins, the inner pins are left in for mounting support.

5mm Grid PCB VIEW

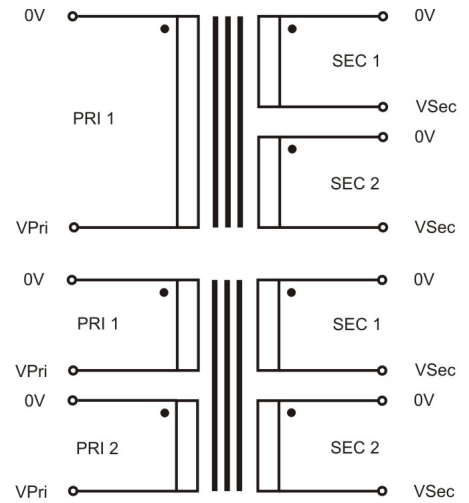

Windings can be connected in Parallel or Series

VA Rating	Dimension (mm)										Hole (mm)	PCB Hole	Weight (g)
	A	B	C	D	E	F	G	H	I				
<b>3</b>	38	32	30	4	25	5	Sq 0.7				1.2	140	
<b>6</b>	43	36	32	4	25	5	1.0x 0.7				1.2	180	
<b>12</b>	54	45	39	4	30	5	1.0 sq.	45	36	3.4	1.5	340	
<b>Tolerance</b>	+/-0.5	+/-0.5	+/-0.5	+/-1.0	-0/+1.5	+/-0.2	+/-0.1				Dia	approx	
<b>12 ~36</b>	Please contact us to discuss your requirements												

Please contact Vigortronix for any enquires. Products can be altered to suit custom requirements.  
The information contained in this document is subject to change without notice.

Twin Secondaries					
VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	Regulation (%)
3	<b>VTX-120-3803-2045</b>	230	2 x 4.5	333	20
3	<b>VTX-120-3803-206</b>	230	2 x 6	250	20
3	<b>VTX-120-3803-2075</b>	230	2 x 7.5	200	20
3	<b>VTX-120-3803-209</b>	230	2 x 9	166	20
3	<b>VTX-120-3803-212</b>	230	2 x 12	125	20
3	<b>VTX-120-3803-215</b>	230	2 x 15	100	20
3	<b>VTX-120-3803-218</b>	230	2 x 18	83	20
3	<b>VTX-120-3803-220</b>	230	2 x 20	75	20
3	<b>VTX-120-3803-224</b>	230	2 x 24	63	20
6	<b>VTX-120-4206-2045</b>	230	2 x 4.5	666	25
6	<b>VTX-120-4206-206</b>	230	2 x 6	500	25
6	<b>VTX-120-4206-2075</b>	230	2 x 7.5	400	25
6	<b>VTX-120-4206-209</b>	230	2 x 9	333	25
6	<b>VTX-120-4206-212</b>	230	2 x 12	250	25
6	<b>VTX-120-4206-215</b>	230	2 x 15	200	25
6	<b>VTX-120-4206-218</b>	230	2 x 18	166	25
6	<b>VTX-120-4206-220</b>	230	2 x 20	150	25
6	<b>VTX-120-4206-224</b>	230	2 x 24	125	25
12	<b>VTX-120-5412-2045</b>	230	2 x 4.5	1333	12
12	<b>VTX-120-5412-206</b>	230	2 x 6	1000	12
12	<b>VTX-120-5412-2075</b>	230	2 x 7.5	800	12
12	<b>VTX-120-5412-209</b>	230	2 x 9	666	12
12	<b>VTX-120-5412-212</b>	230	2 x 12	500	12
12	<b>VTX-120-5412-215</b>	230	2 x 15	400	12
12	<b>VTX-120-5412-218</b>	230	2 x 18	333	12
12	<b>VTX-120-5412-220</b>	230	2 x 20	300	12
12	<b>VTX-120-5412-224</b>	230	2 x 24	250	12

Twin Secondaries					
VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	Regulation (%)
3	VTX-120-3803-4045	2 x 115	2 x 4.5	333	20
3	VTX-120-3803-406	2 x 115	2 x 6	250	20
3	VTX-120-3803-4075	2 x 115	2 x 7.5	200	20
3	VTX-120-3803-409	2 x 115	2 x 9	166	20
3	VTX-120-3803-412	2 x 115	2 x 12	125	20
3	VTX-120-3803-415	2 x 115	2 x 15	100	20
3	VTX-120-3803-418	2 x 115	2 x 18	83	20
3	VTX-120-3803-420	2 x 115	2 x 20	75	20
3	VTX-120-3803-424	2 x 115	2 x 24	63	20
6	VTX-120-4206-4045	2 x 115	2 x 4.5	666	25
6	VTX-120-4206-406	2 x 115	2 x 6	500	25
6	VTX-120-4206-4075	2 x 115	2 x 7.5	400	25
6	VTX-120-4206-409	2 x 115	2 x 9	333	25
6	VTX-120-4206-412	2 x 115	2 x 12	250	25
6	VTX-120-4206-415	2 x 115	2 x 15	200	25
6	VTX-120-4206-418	2 x 115	2 x 18	166	25
6	VTX-120-4206-420	2 x 115	2 x 20	150	25
6	VTX-120-4206-424	2 x 115	2 x 24	125	25
12	VTX-120-5412-4045	2 x 115	2 x 4.5	1333	12
12	VTX-120-5412-406	2 x 115	2 x 6	1000	12
12	VTX-120-5412-4075	2 x 115	2 x 7.5	800	12
12	VTX-120-5412-409	2 x 115	2 x 9	666	12
12	VTX-120-5412-412	2 x 115	2 x 12	500	12
12	VTX-120-5412-415	2 x 115	2 x 15	400	12
12	VTX-120-5412-418	2 x 115	2 x 18	333	12
12	VTX-120-5412-420	2 x 115	2 x 20	300	12
12	VTX-120-5412-424	2 x 115	2 x 24	250	12

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [vigortronix](#) manufacturer:*

Other Similar products are found below :

[VTX-214-001-106](#) [VTX-214-010-209](#) [VTX-214-010-212](#) [VTX-214-005-0524](#) [VTX-214-001-305](#) [VTX-146-015-225](#) [VTX-146-100-212](#)  
[VTX-146-120-218](#) [VTX-214-006-106](#) [VTX-214-001-124](#) [VTX-214-003-306](#) [VTX-214-0005-107](#) [VTX-121-3023-218](#) [VTX-146-060-215](#)  
[VTX-146-100-224](#) [VTX-146-625-225](#) [VTX-214-020-124](#) [VTX-146-100-218](#) [VTX-146-300-230](#) [VTX-101-003](#) [VTX-214-005-0312](#) [VTX-](#)  
[214-001-306](#) [VTX-214-001-318](#) [VTX-214-001-324](#) [VTX-214-003-315](#) [VTX-102-000](#) [VTX-214-001-312](#) [VTX-121-3015-412](#) [VTX-120-](#)  
[5412-406](#) [VTX-214-005-015](#) [VTX-214-003-109](#) [VTX-131-001](#) [VTX-214-002-305](#) [VTX-146-500-240](#) [VTX-146-160-230](#) [VTX-146-500-230](#)  
[VTX-214-005-424](#) [VTX-121-3023-418](#) [VTX-214-002-118](#) [VTX-214-001-309](#) [VTX-146-050-218](#) [VTX-214-003-106](#) [VTX-120-006-509](#)  
[VTX-214-005-0324](#) [VTX-214-002-312](#) [VTX-214-001-312X](#) [VTX-214-010-206](#) [VTX-214-002-107](#) [VTX-214-002-106](#) [VTX-214-001-303](#)