
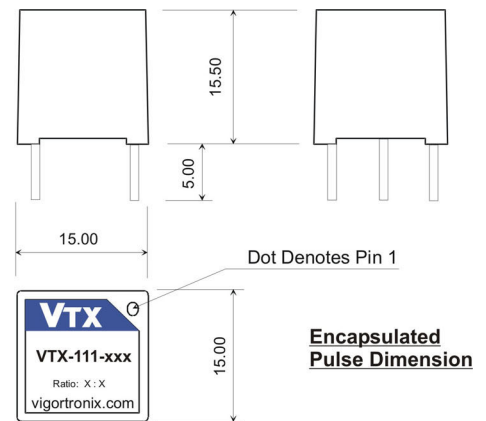
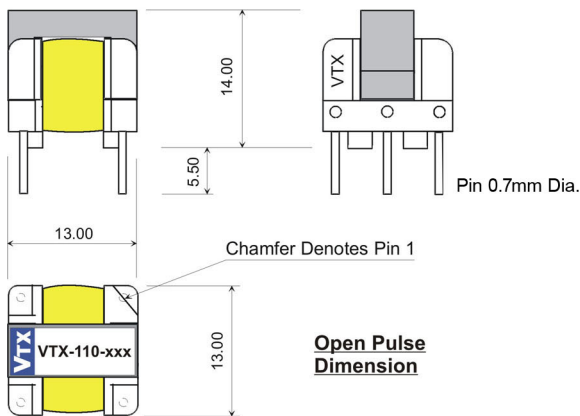

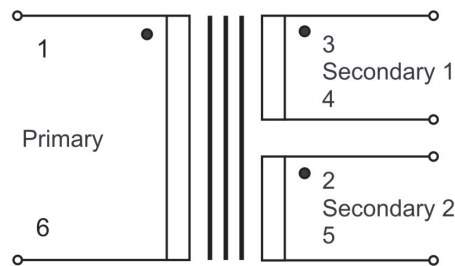


### Features:

- Open or Encapsulated PCB mounting
- Designed for Wide band and General Pulse applications.
- Ideal for Triac and Thyristor Control Systems
- Max Pulse Current 200mA (Peak)
- RoHS Compliant

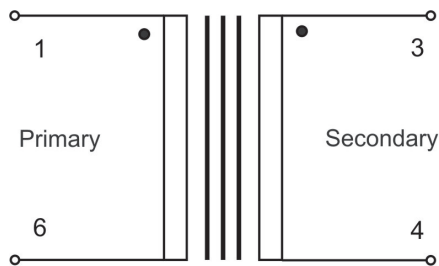

Part No	Ratio	Ind. Pri (mH) Min	Ind. Sec (mH) Min	Pri DCR $\Omega$ +/-10%	Sec DCR $\Omega$ +/-10%	Int-Wind Cap	Leakage Ind.	Isolation Voltage	Bandwidth	Volt-Time Prod.	Max Pulse Current
VTX-110-004	1:1	3	3	1.10	1.32	20pF	19uH	2.8KVac	3kHz ~ 1MHz	200V uS	200mA
VTX-111-004	1:1	3	3	1.10	1.32						
VTX-110-006	1:1+1	3	3 + 3	1.32	1.1+1.54	30pF	8uH				
VTX-111-006	1:1+1	3	3 + 3	1.32	1.1+1.54						
VTX-110-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0	26pF	30uH				
VTX-111-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0						
VTX-110-010	2:1	12	3	2.32	1.45	19pF	115uH				
VTX-111-010	2:1	12	3	2.32	1.45						
VTX-111-042	1:1	3	3	0.8	0.8	20pF	85uH	5KVac			
VTX-111-045	2:1	1.5	0.4	0.44	0.2						
VTX-111-047	2:1	12	3	1.6	0.8						

Products can be altered to suite custom requirements. Please contact Vigortronix for your specific requirements.  
The information contained in this document is subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [vigortronix](#) manufacturer:*

Other Similar products are found below :

[VTX-214-001-106](#) [VTX-214-010-209](#) [VTX-214-010-212](#) [VTX-214-005-0524](#) [VTX-214-001-305](#) [VTX-146-015-225](#) [VTX-146-100-212](#)  
[VTX-146-120-218](#) [VTX-214-006-106](#) [VTX-214-001-124](#) [VTX-214-003-306](#) [VTX-214-0005-107](#) [VTX-121-3023-218](#) [VTX-146-060-215](#)  
[VTX-146-100-224](#) [VTX-146-625-225](#) [VTX-214-020-124](#) [VTX-146-100-218](#) [VTX-146-300-230](#) [VTX-101-003](#) [VTX-214-005-0312](#) [VTX-](#)  
[214-001-306](#) [VTX-214-001-318](#) [VTX-214-001-324](#) [VTX-214-003-315](#) [VTX-102-000](#) [VTX-214-001-312](#) [VTX-121-3015-412](#) [VTX-120-](#)  
[5412-406](#) [VTX-214-005-015](#) [VTX-214-003-109](#) [VTX-131-001](#) [VTX-214-002-305](#) [VTX-146-500-240](#) [VTX-146-160-230](#) [VTX-146-500-230](#)  
[VTX-214-005-424](#) [VTX-121-3023-418](#) [VTX-214-002-118](#) [VTX-214-001-309](#) [VTX-146-050-218](#) [VTX-214-003-106](#) [VTX-120-006-509](#)  
[VTX-214-005-0324](#) [VTX-214-002-312](#) [VTX-214-001-312X](#) [VTX-214-010-206](#) [VTX-214-002-107](#) [VTX-214-002-106](#) [VTX-214-001-303](#)