



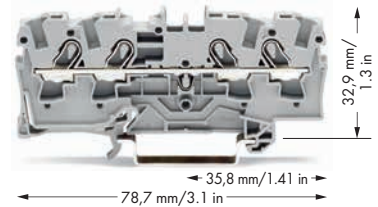



TOPJOB® S

Through/Ground Conductor/Shield and Ex Terminal Blocks 4 (6) mm²

2004 Series

0.5 ... 4 (6) mm ² ① AWG 20 ... 10 800 V/8 kV/3 ② 600 V, 30 A ③ I _N 32 A (41 A) 600 V, 30 A ④ Terminal block width 6.2 mm / 0.244 in.  11 ... 13 mm / 0.47 in. ⑤	0.5 ... 4 (6) mm ² ① AWG 20 ... 10 800 V/8 kV/3 ② 600 V, 30 A ③ I _N 32 A (41 A) 600 V, 30 A ④ Terminal block width 6.2 mm / 0.244 in.  11 ... 13 mm / 0.47 in. ⑤	0.5 ... 4 (6) mm ² ① AWG 20 ... 10 800 V/8 kV/3 ② 600 V, 30 A ③ I _N 32 A (41 A) 600 V, 30 A ④ Terminal block width 6.2 mm / 0.244 in.  11 ... 13 mm / 0.47 in. ⑤
--	---	---



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor through terminal block		3-conductor through terminal block		4-conductor through terminal block	
gray ⑥ 2004-1201 ⑤ 50		gray ⑥ 2004-1301 ⑤ 50		gray ⑥ 2004-1401 ⑤ 50	
blue ⑥ 2004-1204 ④ ⑤ 50		blue ⑥ 2004-1304 ④ ⑤ 50		blue ⑥ 2004-1404 ④ ⑤ 50	
orange ⑥ 2004-1202 ⑤ 50		orange ⑥ 2004-1302 ⑤ 50		orange ⑥ 2004-1402 ⑤ 50	
red ⑥ 2004-1203 ⑤ 50		red ⑥ 2004-1303 ⑤ 50		red ⑥ 2004-1403 ⑤ 50	
black ⑥ 2004-1205 ⑤ 50		black ⑥ 2004-1305 ⑤ 50		black ⑥ 2004-1405 ⑤ 50	
yellow ⑥ 2004-1206 ⑤ 50		yellow ⑥ 2004-1306 ⑤ 50		yellow ⑥ 2004-1406 ⑤ 50	
2-conductor ground terminal block		3-conductor ground terminal block		4-conductor ground terminal block	
green-yellow ⑥ 2004-1207 ⑤ 50		green-yellow ⑥ 2004-1307 ⑤ 50		green-yellow ⑥ 2004-1407 ⑤ 50	
Other terminal blocks with the same profile:		Other terminal blocks with the same profile:		Other terminal blocks with the same profile:	
Diode 2004-1211/1000-401 Page 84		Diode 2004-1311/1000-401 Page 84		Diode 2004-1411/1000-401 Page 84	
Item-Specific Accessories		Item-Specific Accessories		Item-Specific Accessories	
End and intermediate plate, 1 mm thick		End and intermediate plate, 1 mm thick		End and intermediate plate, 1 mm thick	
orange 2004-1292 100 (4x25)		orange 2004-1392 100 (4x25)		orange 2004-1492 100 (4x25)	
gray 2004-1291 100 (4x25)		gray 2004-1391 100 (4x25)		gray 2004-1491 100 (4x25)	
Separator, oversized, 2 mm thick		Separator, oversized, 2 mm thick		Separator, oversized, 2 mm thick	
orange 2004-1294 100 (4x25)		orange 2004-1394 100 (4x25)		orange 2004-1494 100 (4x25)	
gray 2004-1293 100 (4x25)		gray 2004-1393 100 (4x25)		gray 2004-1493 100 (4x25)	
Ex e/Ex i separator, orange, 3 mm thick		Ex e/Ex i separator, orange, 3 mm thick		Ex e/Ex i separator, orange, 3 mm thick	
90 mm 209-190 50 (2x25)		120 mm 209-191 50 (2x25)		120 mm 209-191 50 (2x25)	
120 mm 209-191 50 (2x25)					

2004 Series Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

Insulation stop, 5 pcs/strip, 0.25 ... 0.5 mm ² light gray 2004-171 200 (8x25)	Insulation stop, 5 pcs/strip, 0.75 ... 1 mm ² dark gray 2004-172 200 (8x25)	Delta jumper, insulated, I _N = I _N terminal block, light gray 1-2 3-4 5-6 2004-406/020-000 100 (4x25)
Push-in type jumper bar, insulated, I _N 32 A, light gray 2-way 2004-402 200 (8x25) 3-way 2004-403 200 (8x25) 4-way 2004-404 100 (4x25) 5-way 2004-405 100 (4x25) 6-way 2004-406 100 (4x25) 7-way 2004-407 100 (4x25) 8-way 2004-408 100 (4x25) 9-way 2004-409 100 (4x25) 10-way 2004-410 100 (4x25)	Push-in type jumper bar, insulated, I _N 32 A, light gray from 1 to 3 2004-433 200 (8x25) from 1 to 4 2004-434 200 (8x25) from 1 to 5 2004-435 100 (4x25) from 1 to 6 2004-436 100 (4x25) from 1 to 7 2004-437 100 (4x25) from 1 to 8 2004-438 100 (4x25) from 1 to 9 2004-439 100 (4x25) from 1 to 10 2004-440 100 (4x25)	Star point jumper, insulated, I _N = I _N terminal block, light gray 1-3-5 2004-405/011-000 100 (4x25)
		Step-down jumper, insulated, I _N 32 A light gray 2006-499 50 (2x25)
		Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks yellow 2004-115 100 (4x25)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)