



JB5 Jumper Bars

Terminal Blocks Accessories

Features and Benefits

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for various circuits configurations,
- Insulated,
- Positive locking.

Main Technical Data

	IEC	cULus - CSA	Ex e
Rated current	32 A	30 A	
Rated voltage	Standard use	1000 V	600 V
	Cut extremities	800 V	300 V
	Cut poles	400 V	300 V
Impulse withstand voltage	8000 V		
Protection	IP 20	NEMA 1	

Mounting Instructions

Screwless

Tool

Torque

Material Specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 +110 °C	-67 +230 F
	Storage	-55 +110 °C	-67 +230 F
	Installing	-5 +40 °C	-23 +104 F

Ordering Details


JB5 Jumper Bars

Description	Type	Order Code	Pack ^(ing) pieces	Weight g (1 pce)
5.2 mm 0.205 in spacing	2 poles	JB5-2	1SNK 905 302 R0000	50 1.30
	3 poles	JB5-3	1SNK 905 303 R0000	50 2.00
	4 poles	JB5-4	1SNK 905 304 R0000	50 2.70
	5 poles	JB5-5	1SNK 905 305 R0000	50 3.50
	10 poles	JB5-10	1SNK 905 310 R0000	30 7.10
	50 poles	JB5-50	1SNK 905 350 R0000	10 36.10

JB5 Accessories

Description	Type	Order Code	Pack ^(ing) pieces	Weight g (1 pce)
1 Circuit Separators	Dark Grey	CS	1SNK 900 101 R0000	20 0.20

JB5 Mounting Instructions

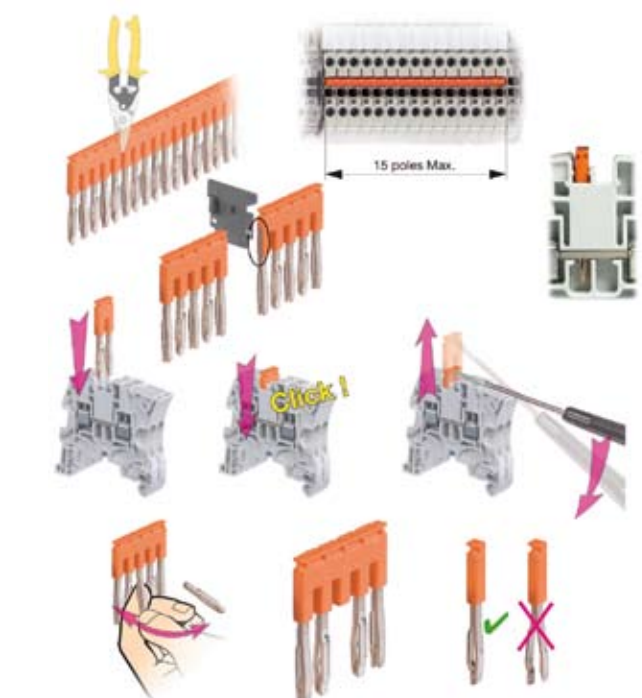

- Caution: use of 50 poles jumper bars or cut jumper bars is not allowed in Explosive atmospheres,
- Jumper bar with cut extremities: when mounted on feed-through or ground terminal blocks: the circuit separator CS must be installed on the cut side,
- Jumper bar with cut poles: for alternated jumpering between terminal blocks.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [entrelec](#) manufacturer:

Other Similar products are found below :

[023103024](#) [023000107](#) [1SNK505310R0000](#) [017322627](#) [011762822](#) [016511417](#) [016340320](#) [1SNK516020R0000](#) [023300421](#)

[1SNK510010R0000](#) [018731214](#) [011870703](#) [010500220](#) [011511607](#) [023300227](#) [016049626](#) [017666704](#) [1SNK508411R0000](#) [023300320](#)

[016548827](#) [023300001](#) [012511813](#) [017301610](#) [011546820](#) [010500127](#)