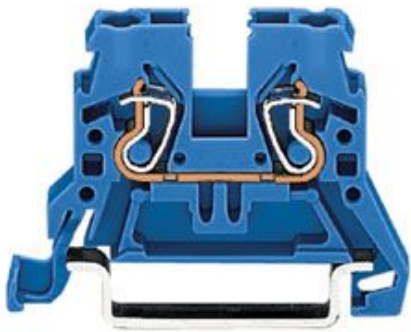

Item no.: 870-904
Product description: 2-Conductor through terminal block suitable for Ex i applications



Produkt kann von Bild abweichen / product may differ

Packing unit 100 pieces

RoHS compliant

Product group	16 (RAIL MOUNTED TERMINAL BLOCK WITH CCC)
Cross section [mm ²]	0.08 - 2.5 mm ²
Cross section [AWG]	28 - 14 AWG
Wiring method	s + f-st
Connection method	CAGE CLAMP®COMPACT CONNECTION
Cross section [mm ²]	0.08 - 4 mm ²
Cross section [AWG]	28 - 12 AWG
Wiring method	f
Connection method	CAGE CLAMP®COMPACT CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	24 A
Weight	4.1 g
Color	blue
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	1
Height	27.5 mm

Height
Width
Width

1.08 in
5 mm
0.197 in



Depth	44.5 mm
Depth	1.75 in
Strip length from	6 mm
Strip length to	7 mm
Strip length	0.26 in
Mounting	TS 35



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
870-904	ABS	05-HG476175/3-PDA	500	24	2,5
870-904	CCA	NL6826	500	24	2,5
870-904	cURus	E45172	300	20	28-12
870-904	DNV	E-9214	500	24	2,5
870-904	GL	17295-00HH	500	24	2,5
870-904	KEMA	2143311.01	500	24	2,5
870-904	LR	91/20112(E6)	500	24	2,5

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)