


Sta-Kon®

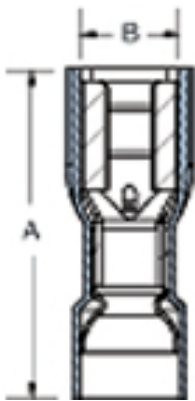

Disconnects

T&B Catalog Number:

18RA-2577

UPC Number:

78621083933

Status:

Active

Description:

Fully Insulated Nylon Female - 250 Series Disconnects For Wire Range 22-18 Length 0.97, Tab Size .250 x .032, Red

WEB_USE

US Cutsheet PDF Catalog Link

<http://www-public.tnb.com/contractor/docs/stakon.pdf>

Features

Unique construction of the female disconnect offers long-term dependability. Brazed seam serrated barrel provides maximum tensile strength.

General

Disconnect Type	Female - 250 Series
Insulation Type	Fully Insulated Nylon
Terminal Series	RA
Material	Brass
Finish	Electro -Tin Plated
Color	Red
Wire Range	22-18
Tab Size	.250 x .032

Dimension Information

Maximum Insulation (inches)	.165
Stock Thickness	.03
A (inches)	.97
B (inches)	.38

Specifications

Temperature Rating	105°C
Voltage Rating	600V
Flammability Rating	UL 94 V-2

Tooling

Tool Charts	Available on Website
Application Tools	WT145C, WT2000, WT112M, ERG4001, ERG4003
Recommended Tool	ERG4001

Packaging

T&B Order Multiple	100
T&B Inner Pack	100
Package in Units	500
Package Type	Standard
T&B Sold in UOM	Each
T&B Weight Per UOM	0.45 lbs. per 100
Alternate Package Qty	RA2573

Application Support

Overview

Available on Website

Wire Guide Tables

Available on Website

Certifications

RoHS Compliance

Yes

Certifications



File Nbr:

E66716

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [abb](#) manufacturer:

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F204AC-40/0.1](#) [F362-25/0.03](#) [GJL1211001R0011](#) [GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#) [GJL1311201R0001](#) [GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#) [1SFA611101R1002](#) [1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#) [1SVR730020R0200](#) [IPC4111](#) [OS30FACC12](#) [OS60GJ03](#) [OVR1N160277PS](#) [OXC1L48](#)