

ERTD Series


Disconnect terminals Morsetti Sezionatori

ERTD4

Width/Larghezza 6mm
353 100i BEIGE/BEIGE

Disconnect terminals allow open circuit without disconnecting the conductors by a disconnect busbar. In the disconnect, the disconnect busbar can be changed with a proper fuse to use as a fuse terminal. In ERTD 4 terminals, disconnection is achieved by lifting the knife contact to provide clear functional advantage for devices having utility instruments and associated transformers.

I morsetti sezionatori possono interrompere il circuito senza, togliere i fili per mezzo di un sezionatore. Nel sezionatore ERTD 2 baretta sezionatrice può essere sostituita con un fusibile, divenendo quindi come un morsetto con fusibile. Nel morsetto ERTD 4 il sezionamento avviene sollevando il sezionatore a cottellino, permettendo così un facile azionamento.



Electrical ratings/Caratteristiche nominali Elettriche

Voltage/Current/Cross section / Tensione/Corrente/Sezione	500V~/24A/4mm ²
UL/UL	
Insulation stripping length/Spellatura carvo	10mm

Connection Data/Dati di Connessione

Solid Strand, Screw Connection/Cavo Rigido, Connessione a Vite	0.5....6mm ²
Fine Strand, Screw Connection/Cavo Flessibile, Connessione a Vite	1.5....4mm ²
AWG Conductor/Conduttore AWG	26.....10


Ordering Data/Dati di Ordinazione

	Type/Tipo	Cat. No/Nr.Cat	Qty/Q.ta
Poliamide 6.6	ERTD 4	353 100i	20


Mounting Rails/Guida di Montaggio

	Type/Tipo	Cat.No/Nr.Cat	Qty/Q.ta
MR 32	MR 35x7.5	500 601i	1m
	Slotted/Fessurat	500 602i	1m
	MR 35x7.5	500 603i	2m
	Slotted/Fessurat	500 604i	2m
	MR 35x7.5	500 605i	30cm
	MR 35x15	500 606i	1m
	Slotted/Fessurat	500 607i	1m

End Bracket/Terminale di Fissaggio

	ES1	For/Per MR 35 & MR 35 BEIGE/BEIGE For/Per MR 35 BEIGE/BEIGE	ES3	495 030i	100
			ES1	495 040i	100

End Plate/Partition/Paretina

	Thickness/Spessore 1.5mm EPF3	Poliamide 6.6 BEIGE/BEIGE	EPF 3	450 050i	10
---	----------------------------------	------------------------------	-------	-----------------	----

Cross-Connection/Ponticelli

	CCS 4/2	476 232i	25
	CCS 4/3	476 233i	20
	CCS 4/4	476 234i	15
	CCS 4/10	476 239i	5

Group Marking/Gruppo di Siglatura

	GM BEIGE/BEIGE	GM	496 110i	50
---	----------------	----	-----------------	----

ERTD3




Width/Larghezza 6mm
362 000i BEIGE/BEIGE

ERTD3M


Width/Larghezza 6mm
363 000i BEIGE/BEIGE

ERTD2

Width/Larghezza 6mm
360 110i BEIGE/BEIGE

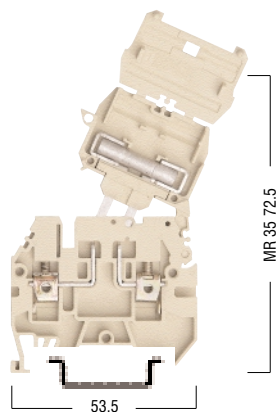

500V~/24A/4mm ²	500V~/24A/4mm ²	500V~/24A/4mm ²						
600V~/10A/AWG 26-10	600V~/10A/AWG 26-10	300V~/6.3A/AWG 26-8						
10mm	10mm	12mm						
0.5...6mm ²	0.5...6mm ²	0.5...10mm ²						
1.5...4mm ²	1.5...4mm ²	1.5...10mm ²						
26.....10	26.....10	26.....8						
Type/Tipo	Cat. No/Nr.Cat	Qty/Q.ta	Type/Tipo	Cat. No/Nr.Cat	Qty/Q.ta	Type/Tipo	Cat. No/Nr.Cat	Qty/Q.ta
ERTD 3	362 000i	20	ERTD 3M	363 000i	20	ERTD 2	360 110i	20
Type/Tipo	Cat.No/Nr.Cat	Qty/Q.ta	Type/Tipo	Cat.No/Nr.Cat	Qty/Q.ta	Type/Tipo	Cat.No/Nr.Cat	Qty/Q.ta
MR 35x7.5	500 601i	1m	MR 35x7.5	500 601i	1m	MR 35x7.5	500 601i	1m
Slotted/Fessurat	500 602i	1m	Slotted/Fessurat	500 602i	1m	Slotted/Fessurat	500 602i	1m
MR 35x7.5	500 603i	2m	MR 35x7.5	500 603i	2m	MR 35x7.5	500 603i	2m
Slotted/Fessurat	500 604i	2m	Slotted/Fessurat	500 604i	2m	Slotted/Fessurat	500 604i	2m
MR 35x7.5	500 605i	30cm	MR 35x7.5	500 605i	30cm	MR 35x7.5	500 605i	30cm
MR 35x15	500 606i	1m	MR 35x15	500 606i	1m	MR 35x15	500 606i	1m
Slotted/Fessurat	500 607i	1m	Slotted/Fessurat	500 607i	1m	Slotted/Fessurat	500 607i	1m
ES3	495 030i	100	ES3	495 030i	100	ES3	495 030i	100
ES1	495 040i	100	ES1	495 040i	100	ES1	495 040i	100
EPF 3	450 050i	10	EPF 3	450 050i	10	EPF 2	450 040i	10
CCS 4/2	476 232i	25	CCS 4/2	476 232i	25			
CCS 4/3	476 233i	20	CCS 4/3	476 233i	20			
CCS 4/4	476 234i	15	CCS 4/4	476 234i	15			
CCS 4/10	476 239i	5	CCS 4/10	476 239i	5			
GM	496 110i	50	GM	496 110i	50	GM	496 110i	50

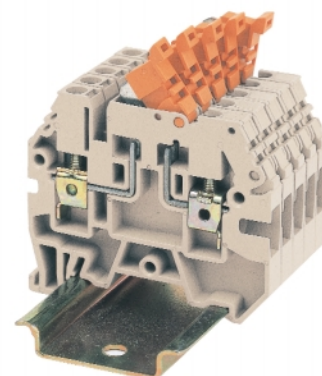

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for imo manufacturer:

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [LDC18RRS](#) [SFSYE0111](#) [21.1500M/6-E](#) [20.3304M/2-E](#)
[21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#) [MSSTC11DA06](#) [20.2500M/4-E](#)
[20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-SL-12VDC](#)
[QYE21XXF24DC](#) [20.920M/5-E](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [MC10N-S-10110AC](#) [21.95MV/3](#) [MB09-S-1024](#) [MA05-S-](#)
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [SRGA-1A-SL-24VDC](#) [21.1500M/3-E](#) [21.95MHF/6-E](#) [20.95MV/2-E](#)
[20.155MV/4-E](#) [ER2.5BEIGE](#) [20.950M/2-E](#) [MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#)