


GN 50.3

Retaining magnets

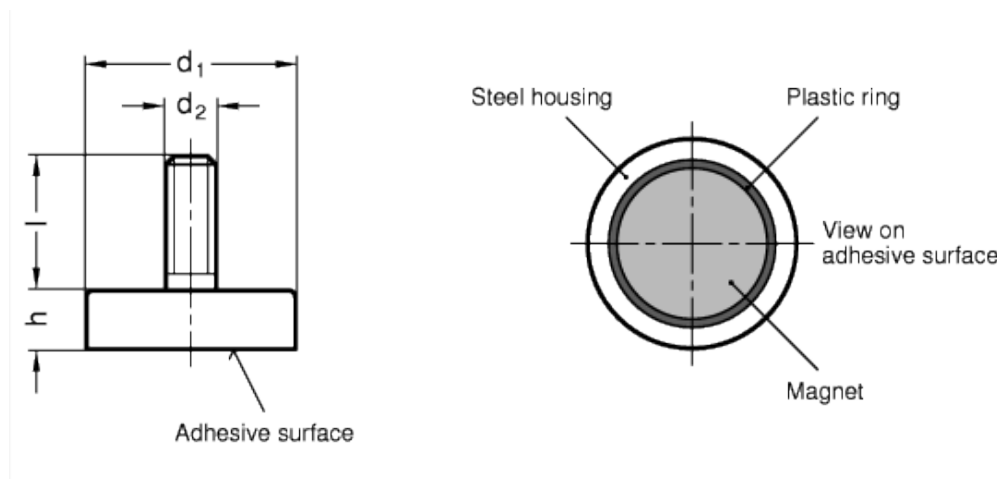

technical informations

Specification

Disc-shaped, with threaded stud
Housing / threaded stud steel, zinc-plated

Materials of the magnet

- Hard ferrite HF, temperature resistant up to 200° C
- Neodymium, iron, boron NdFeB ND, temperature resistant up to 80° C

Features and applications

Retaining magnets GN 50.3 are a shielded magnetic system.

Standard Elements	Main dimensions				Nominal adhesive forces in N	Weigh g
	Description	d ₁	d ₂	h		
GN 50.3-HF-10-M3	10 _{±0.1}	M 3	4.5 _{+0.2/-0.1}	7	4	2

GN 50.3-HF-13-M3	13 _{±0.1}	M 3	4.5 _{+0.2/-0.1}	7	10	3
GN 50.3-HF-16-M3	16 _{±0.1}	M 3	4.5 _{+0.2/-0.1}	7	18	5
GN 50.3-HF-20-M3	20 _{±0.1}	M 3	6 _{+0.2/-0.1}	7	30	10
GN 50.3-HF-25-M4	25 _{±0.1}	M 4	7 _{+0.3/-0.1}	8	40	19
GN 50.3-HF-32-M4	32 _{±0.1}	M 4	7 _{+0.3/-0.1}	8	80	30
GN 50.3-HF-47-M6	47 _{+0.2/-0.1}	M 6	9 _{+0.5/-0.1}	8	180	85
GN 50.3-HF-63-M6	63 _{+0.3/-0.1}	M 6	14 _{+0.5/-0.1}	15	350	233
GN 50.3-ND-10-M4	10 _{±0.1}	M 4	4.5 _{±0.1}	8	25	3
GN 50.3-ND-13-M5	13 _{±0.1}	M 5	4.5 _{±0.1}	8	60	5
GN 50.3-ND-16-M6	16 _{±0.1}	M 6	4.5 _{±0.1}	8	95	5
GN 50.3-ND-20-M6	20 _{±0.1}	M 6	6 _{±0.1}	10	140	15
GN 50.3-ND-25-M6	25 _{±0.1}	M 6	7 _{±0.1}	10	200	27
GN 50.3-ND-32-M6	32 _{±0.1}	M 6	7 _{±0.1}	10	350	42



STANDARD MACHINE ELEMENTS WORLDWIDE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Hall Effect/Magnetic Sensors](#) category:

Click to view products by [Elesa & Ganter](#) manufacturer:

Other Similar products are found below :

[GT-13013](#) [GT-13040](#) [GT-14114](#) [GT-14123](#) [DRR-129\(62-68\)](#) [ATS682LSHTN-T](#) [SR4P2-C7](#) [GT-12076](#) [GT-13012](#) [GT-14049](#) [GT-14067](#) [GT-14132](#) [GT-18030](#) [103FW12-R3](#) [A1155LLHLT-T](#) [A1106EUA-T](#) [SMSA2P30CG](#) [P2D-000](#) [GN 55.2-SC-15-3](#) [GN 55.2-SC-5-3](#) [103FW41-R1](#) [KJR-D100AN-DNA-VE](#) [KJR-D100AN-DNIA-V2](#) [SR-10018](#) [ECC464558EU](#) [SC9641TS](#) [CS200BK](#) [QMC6308](#) [VSM025A/8mA](#) [M10-JB5020D](#) [M12-JB8002C](#) [M12-JB8002D](#) [M12-JK5002B](#) [M8-MJK](#) [M12-MJK](#) [MM18-70APS-ZCK](#) [103FW5-4](#) [ATS128LSETN-T](#) [TLE4906LHALA1](#) [TLE49452LHALA1](#) [MMA8452Q](#) [BU52013HFV-TR](#) [MRMS591A](#) [103SR14A-1](#) [MZT7-03VPS-KR0](#) [MZT7-03VPS-KW0](#) [MZT8-03VPS-KW0](#) [MZT8-28VPS-KP0](#) [MM12-60APO-ZUK](#) [A1326LLHLX-T](#)