
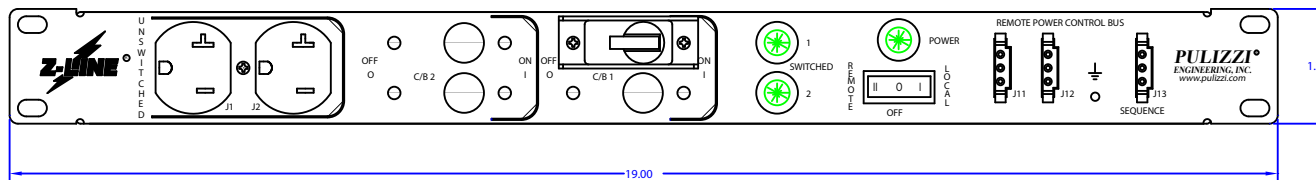
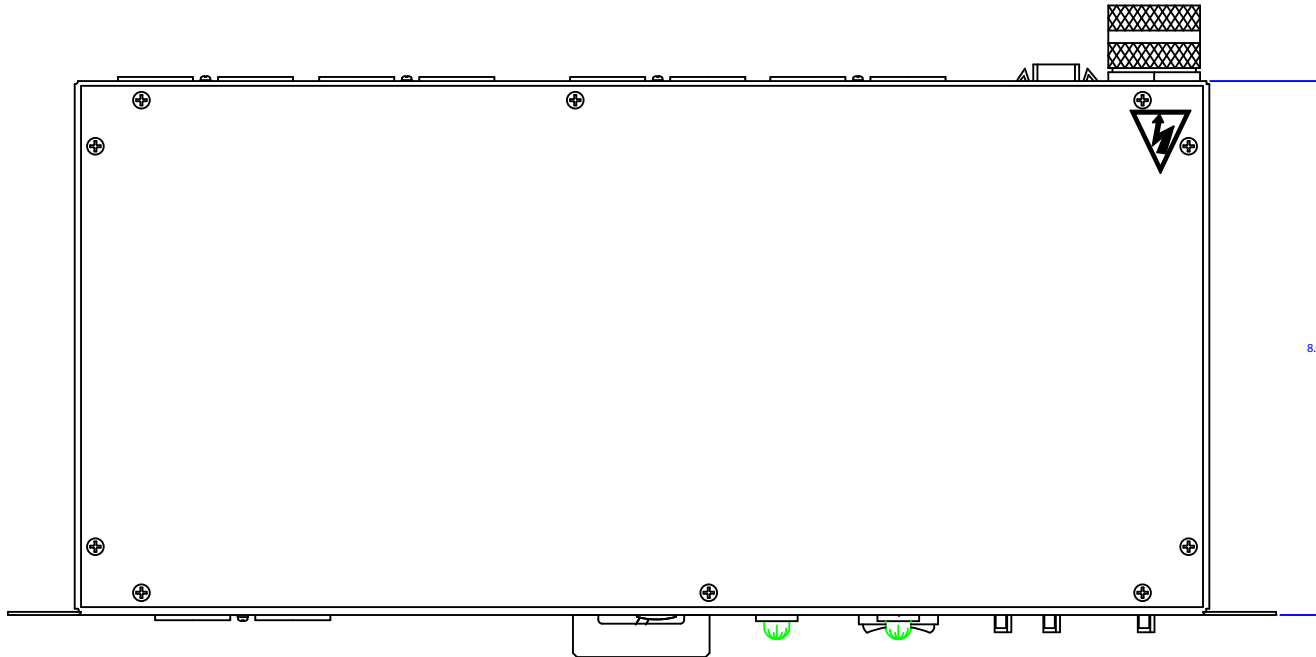


LTR	ECCO No.	REVISION	DR	CK	AP	DATE
A		RELEASED	J.O			4 AUG 99
B		TOP VIEW CORRECTED	J.O			9 AUG 00
C	5841	UPDATED ASSY REV	DK		GH	10/19/00
D	6515	ADD WARNING LABEL	J.O			5 SEPT 01
E	6626	CHG. SILKSCREEN	LS		DK	30 OCT 01
F	8128	UPDATED J#S	JK			05/27/05

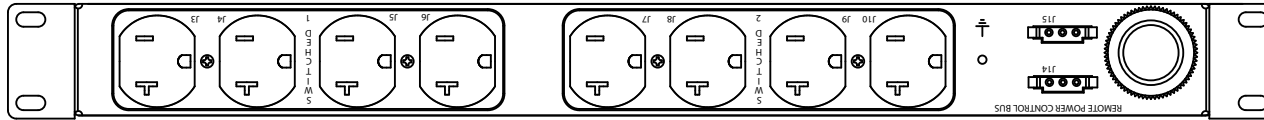

- RACK MOUNTED STEEL CHASSIS ZINC PLATED  
19.00" WIDE STANDARD RACK MOUNTING  
1.72" HIGH  
8.00" DEEP  
CHASSIS SUPPORT BRACKETS OR SLIDES ARE REQUIRED
- INPUT: 125 VAC, SINGLE PHASE, 50/60 HZ.  
20A MAXIMUM TOTAL CURRENT  
9' 12/3 CABLE WITH 5-20 PLUG
- OUTPUT: TEN NEMA 5-20R RECEPTACLES  
2 UNSWITCHED  
4 SWITCHED IN SECTION 1  
4 SWITCHED IN SECTION 2
- CIRCUIT BREAKER: 1 POLE 20 AMP MAGNETIC  
HIGH-INRUSH TIME DELAY CURVE.
- INDICATOR LIGHTS: POWER ON  
SECTION 1 ON  
SECTION 2 ON
- FILTER: EMI/RFI, 20 AMP RATING, 50/60 HZ.  
COMMON MODE, LINE TO GROUND  
DIFFERENTIAL MODE, LINE TO LINE
- REMOTE I/O SWITCHING CONNECTORS  
5 EACH, FEMALE, AMP # 1-480304-0  
WITH AMP 60619-1 SOCKET CONTACTS.  
MATES WITH AMP # 1-480305-0 CONNECTOR  
AND AMP # 60620-1 SOCKET CONTACT  
  

PIN 1	○	POWER REQUEST
PIN 2	○	EMERGENCY SHUTDOWN
PIN 3	○	SIGNAL RETURN

  
CONNECT PINS 1 AND 3 FOR REMOTE ON/OFF  
CONNECT PINS 2 AND 3 FOR EMERGENCY SHUTDOWN  
FOR TIME DELAY POWER UP OF ADDITIONAL EQUIPMENT  
CONNECT PINS 1 AND 3 ON SEQUENCE PORT  
TO ANY OTHER REMOTE PORTS (PINS 1 AND 3) ON  
ALL "Z-LINE" POWER CONTROLLERS.
- U.L. RECOGNIZED COMPONENTS USED WHERE APPLICABLE.

**Z-LINE** PULIZZI ENGINEERING INC.  
3200 S. Susan Street, Santa Ana, CA 92704  
(714) 540-4229 Fax (714) 641-9062

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF PULIZZI ENGINEERING INC. PULIZZI ENGINEERING INC. RESERVES ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT © 2005 P.E.I.		DIMENSIONS IN INCHES TOLERANCES: DECIMALS ±.005 FRACTIONS ±.005 UNLESS OTHERWISE SPECIFIED		TITLE ENGINEERING DRAWING FOR TPC115-10A2 ASSY 3092		CAGE CODE 70513
SCALE	SIZE	SHEET	DWG NO.	REV		
1:1	D	1	TPC_115_10A2_3092F_ME	F		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [eaton](#) manufacturer:*

Other Similar products are found below :

[BK1-S506-500-R](#) [BK1-S506-6-3-R](#) [BK1-S506-2-R](#) [BK-MDL-3-R](#) [MPI4040R4-1R5-R](#) [89096-015](#) [8946K153](#) [8961K155](#) [M22-DL-W-X0](#)  
[M22-L-R/R](#) [M22S-ST-GB12](#) [630NHG3B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [6NZ01](#) [714125](#)  
[MBO-2](#) [ESR5-NO-41-24VAC-DC](#) [7314K36](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#) [F03A250V12A](#) [MCR-4](#)  
[MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#) [F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [MDQ-3/16](#) [MDQ-7/10](#) [MDV-1-1/2](#) [MDV-3/8](#) [MDV-](#)  
[4](#) [MDV-6/10](#) [FAZ-C2](#) [MIC-2](#) [MIC-30](#) [80910030](#) [FHL-18-W2-1](#) [8138K20W7V52](#) [8175K12L121C50](#)