


Timer EF7616 delay on make, minitimer



EF 7616.24

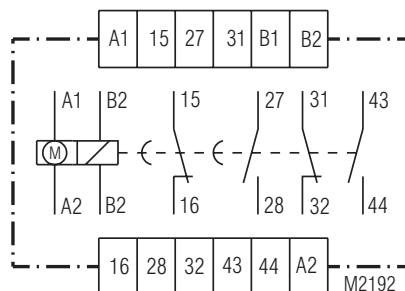

EF 7616.24

- Delay up to 30 h
- 6 switchable time ranges, adjustable on front side
- Repeat accuracy $\leq \pm 0,5 \%$ ($\leq \pm 1 \%$ for ranges 3 s and 6 s)
- Time lapse display
- Switching position display
- With instantaneous contact
- Front side, protected against beam water, IP 65

Technical data:

Time range:

6-range-versions

0.15 ... 3 s, 0.15 ... 3 min, 0.15 ... 3h

1.5 ... 30 s, 1.5 ... 30 min, 1.5 ... 30 h

Recovery time:

150 ms

Repeat accuracy:

$\leq \pm 0.5 \%$ of the max. scale value (for 3 and 6 s $\leq \pm 1 \%$)

Nominal voltage U_N :

AC 230 V

Nominal frequency:

50 / 60 Hz switchable

Output:

EF7616.24

1 NC contact, delayed

1 NC, instantaneous

1 NO contact, delayed

1 NO, instantaneous

3 A / AC 230 V (for NO contacts)

Thermal current I_{th} :

4 A

Temperature range:

- 20 ... + 55 C°

Dimensions:

72 x 72 x 128 mm (width x height x depth)

Front panel cut out:

67 x 67 mm

Type	Order Ref.	U_N	tv	Unit price			
				1+	10+	50+	250+
0024300	9514724	AC 230V	0,15 s ... 30 h	00000	00000	00000	00000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Time Delay & Timing Relays](#) category:

Click to view products by [Dold & Soehne](#) manufacturer:

Other Similar products are found below :

[7012GD](#) [7012L10BN](#) [7012L10DY1N](#) [7012L10FN](#) [7012L10HN](#) [7012L26K](#) [7012L8AI2LLSN](#) [7012L8BN](#) [7012L8KN](#) [7012OBILM](#)
[7012OIT](#) [7012PALL](#) [7012PDM](#) [7012PFX](#) [7022L10DN](#) [7022L8BN](#) [7022L8EN](#) [7022L8HN](#) [7022X3D](#) [7024NB](#) [7024SCT](#) [88256455](#) [H3BG-](#)
[N8H](#) [AC110V](#) [H3CRF8AC2448DC1248](#) [1423151-3](#) [1423154-8](#) [1423462-7](#) [1423618-6](#) [1423151-5](#) [1423156-7](#) [1423618-4](#) [2112AH1SDC947](#)
[2122DH1NJC467](#) [2122DH1PE](#) [2-1617805-2](#) [2-1617805-6](#) [K61C-08](#) [286XCXC-300-24D](#) [SCBRX022XXACXAC991](#) [SHS10S110A](#)
[SHS20M220A](#) [1755074-5](#) [SSC12AKA](#) [FAASPRING2](#) [2112DH3NDC50-13](#) [2122DH34NDC629](#) [2-1437479-8](#) [2-1617805-1](#) [2-1617805-3](#) [2-](#)
[1617805-7](#)