


Data Sheet

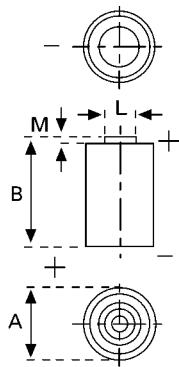

Type Designation	ER AA	
Type Number	7106	
Designation IEC	14500	
System	Primary Li-Thionyl Chloride / Li-SOCl ₂	
UL Recognition:	MH 13654	
Nominal Voltage	3.6 V	
Typical Capacity C	2500 mAh	
Load 2 mA, at 20°C, down to 2.0 V		
Max continuous discharge current	60 mA	
to get 50% of nom. cap +20°C, down to 2.0V		
Max pulse discharge current	150 mA	
Weight (approx.)	16 g	
Volume	8,5 ccm	
Coding	Date of Manufacturing Month / Year	
Temperature Ranges	min	max.
Operating	-55°C	85°C
Dimensions	min	max.
Diameter (A)	14,0	14,6
Height (B)	50,0	50,5
Shoulder Diameter[L].....	4,6	4,8
Shoulder Height [M].....	0,9	1,3
Segment	Electronic	
Main Applications	Utility Metering	
Li metal content	Approx. 0.62g	

warning: Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C (212°F), incinerate, short circuit or expose contents to water. Keep battery out of reach of children and in original package until ready for use. Dispose of used batteries properly.

Internal resistance may rise versus time, especially in case of exposure to elevated temperature.

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [varta manufacturer](#):

Other Similar products are found below :

[56456 702 099](#) [18750](#) [4610 726 406](#) [4122 210 511](#) [LCD-CHARGER + 4XAA 2400MAH](#) [449915B](#) [4607 726 406](#) [55171403014](#)
[55625603059](#) [55615602940](#) [4112101411](#) [4 022 211 111](#) [4 106 101 436](#) [4 020 211 111](#) [MINI CHARGER + 2XAA 2100MAH](#) [MINI-CHARGER](#) [17730](#) [LCD-SMART-CHARGER](#) [414086X](#) [POCKET-CHARGER + 4XAA 2100MAH](#) [458980A](#) [LCD MULTI CHARGER](#)
[CG511-150-PB](#) [EE UNIVERSAL CHARGER](#) [CG401D-050-PB](#) [CG511-050-PB](#) [CU303-018-PB](#) [CG381D-G-100-PB](#) [413675G](#) [CU202-030-PB](#) [55615603059](#) [CG381D-G-150-PB](#) [CG481G-050-PB](#) [CU303-030-PB](#) [CG511D-030-PB](#) [CA317-PB](#) [CG511D-100-PB](#) [CU201G-B-030-PB](#)
[095668F](#) [4600 726 406](#) [CG511-030-PB](#) [CA418-PB](#) [CG481G-030-PB](#) [CG511D-150-PB](#) [CG381D-G-050-PB](#) [CU302-030-PB](#) [CG341-030-PB](#)
[CU201G-B-050-PB](#) [CA089-PB](#) [CU202G-B-030-PB](#)