


ABS-238-RC 11x15x3.0t 80HM SPEAKER

SPEAKERS

Specifications

Rated impedance at 2KHz/2.0Vrms	8±15%Ω
Rated input power	0.5W
Maximum input power	1.0W
Resonant frequency in free air at 2.0Vrms/0.1m	600±20%Hz
Frequency range	f0-20,000Hz
Sound pressure level at 2.0Vrms/0.1m at 2.0kHz	89±3dB
Total harmonic distortion at 1kHz, 2rms/0.1m	10%Max
Coil resistance	7.2±10%Ω
Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
Weight	1.5g

Material	
Frame - PBT	Yoke - SPCC
Diaphragm - PEEK	Voice coil - Copper Wire
Front Cover - PBT	Plate - SPCC
Spring Terminal - SUS	Magnet - NdFeB

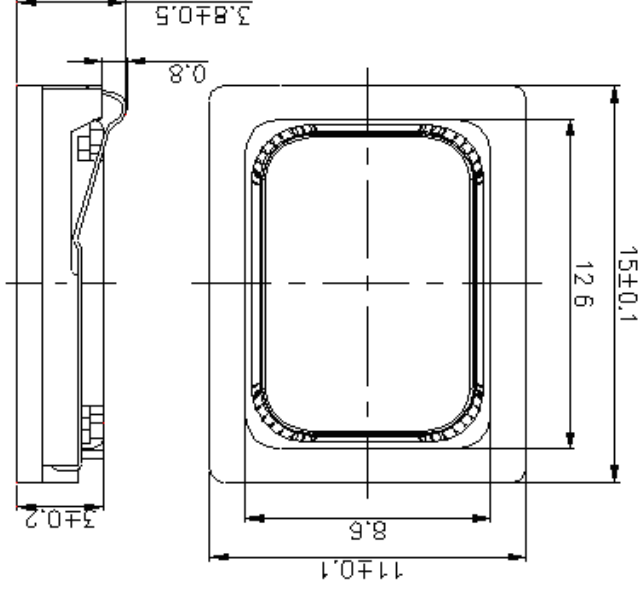

Dimensions Unit: mm

Alan Butcher Components Ltd


Unit 1 Beechwood Clump Farm Industrial Estate Tin Pot Lane Blandford Dorset DT11 7TD
 Telephone 01258 456360 Facsimile 01258 459194 Email sales@abcomponents.co.uk

www.abcomponents.co.uk

ALAN BUTCHER COMPONENTS LTD




BS EN ISO 9001 Certification No 5239

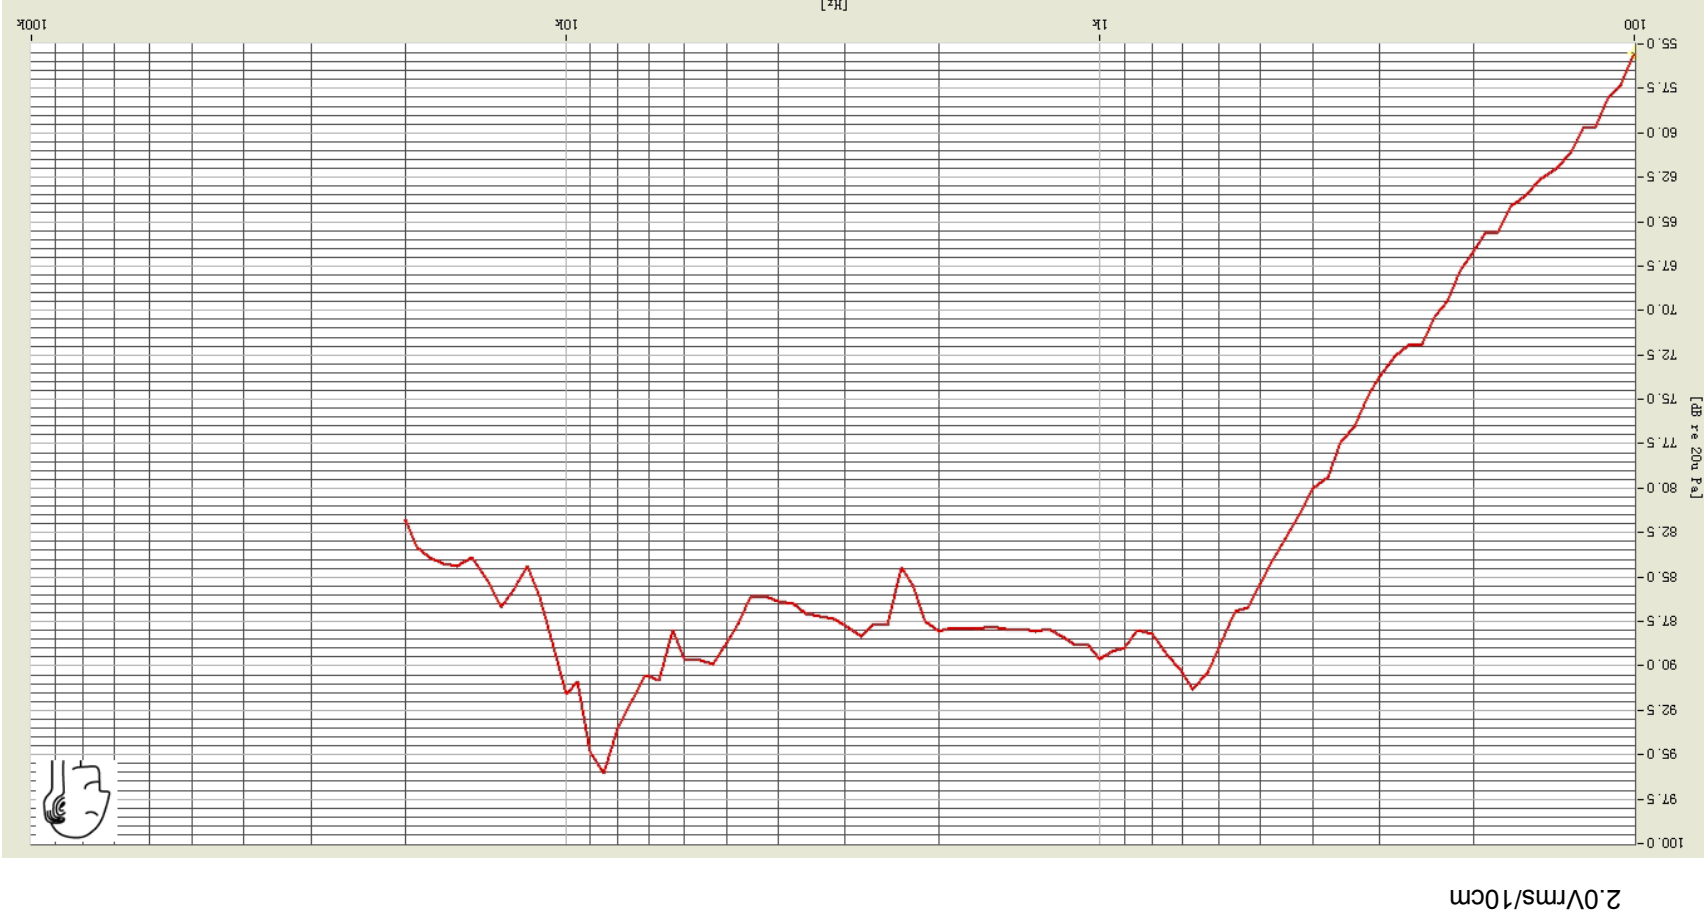

Alan Butcher Components Ltd
Unit 1 Beechwood Clump Farm Industrial Estate Tin Pot Lane Blandford Dorset DT11 7TD
Telephone 01258 456360 Facsimile 01258 459194 Email sales@abcomponents.co.uk
www.abcomponents.co.uk



2.0Vrms/10cm

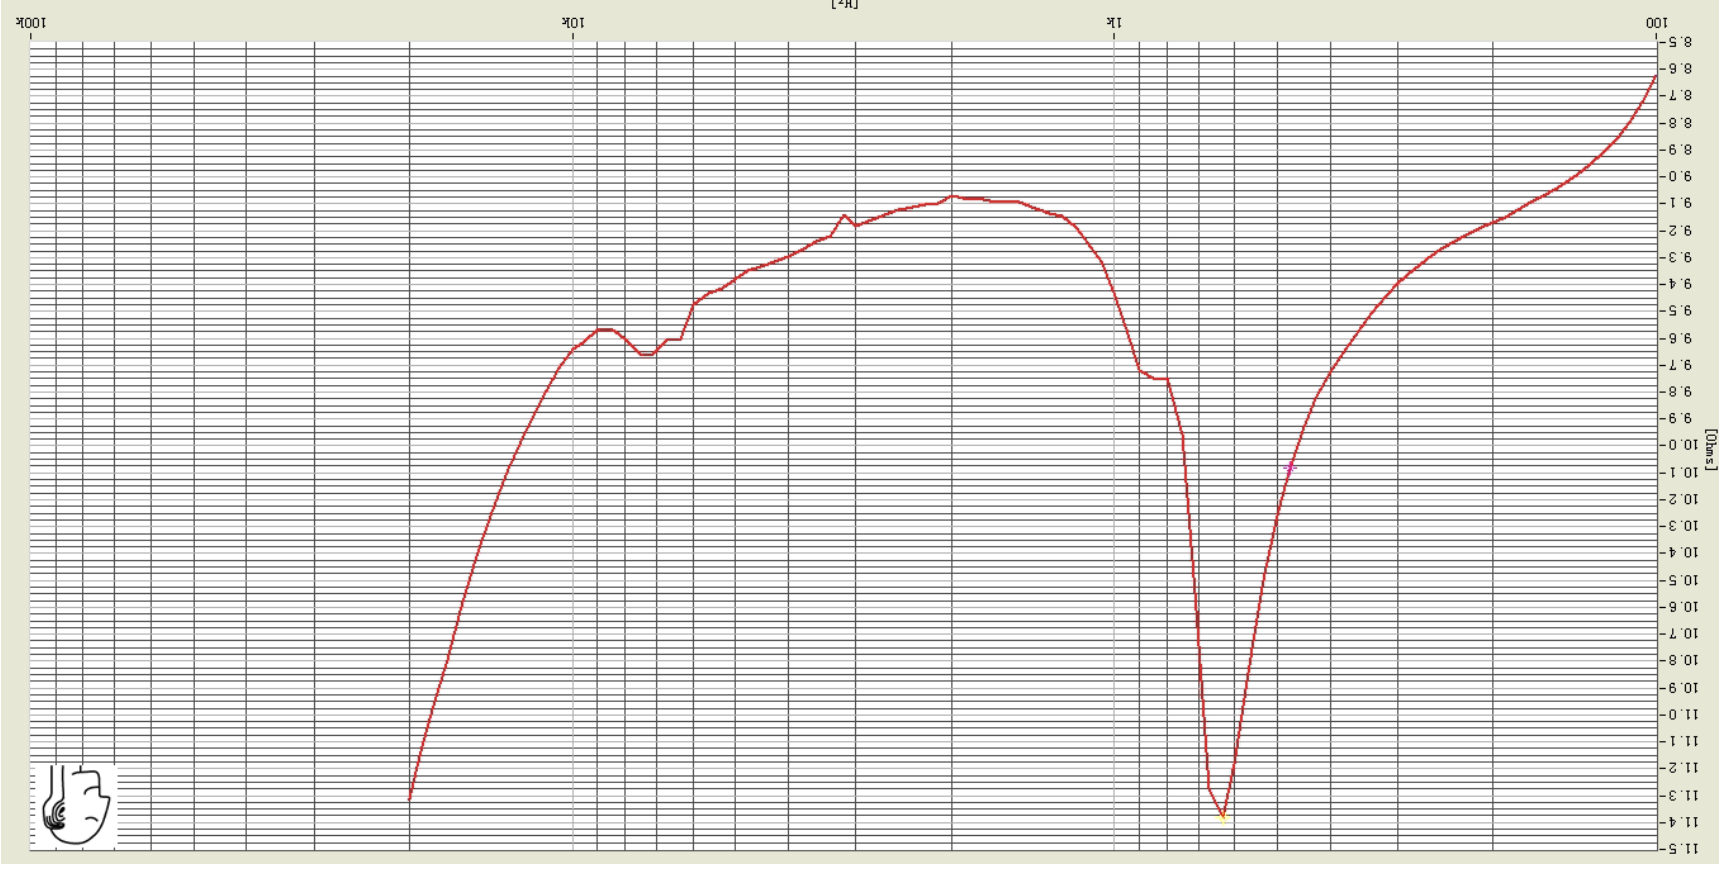

ALAN BUTCHER COMPONENTS LTD

Alan Butcher Components Ltd
Unit 1 Beechwood Clump Farm Industrial Estate Tin Pot Lane Blandford Dorset DT11 7TD
Telephone 01258 456360 Facsimile 01258 459194 Email sales@abcomponents.co.uk
www.abcomponents.co.uk



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [pro signal manufacturer](#):

Other Similar products are found below :

[KVM-404](#) [JR8030/25M](#) [MP-012LN](#) [MJ-2325](#) [AV02019](#) [AV02009](#) [MC34967](#) [MC34971](#) [ABI-049-RC](#) [SVC675S-10M](#) [11.99.8870](#)
[PSG01592](#) [PSG01567](#) [PSG01546](#) [PSG01522](#) [PS11468](#) [PS11199](#) [PS11072](#) [PS11360](#) [PS11156](#) [PS11147](#) [PSG03905](#) [PSG00559](#) [PSG00564](#)
[PS000177](#) [PHONO PLG-PLG 10M](#) [AV02560](#) [AV02595](#) [USB-0039DBL](#) [PSG90957](#) [PSG01495](#) [PSG01462](#) [PS11386](#) [PS11193](#) [PS11028](#)
[PS11179](#) [RP004](#) [PSG90986](#) [27-9650](#) [PSG02699](#) [24-15623](#) [USB2.0EX0104](#) [ABS-237-RC](#) [JR8013-10M](#) [JR8009/5M](#) [LS00532](#) [AVVCL65](#)
[LCL](#) [PSG90820](#) [PSG90806](#)