

Desoldering tool for lead-free soldering

HAKKO FM-204 ESD SAFE

DESOLDERING TOOL



*Nozzle is an optional part.




Built-in pump

Easier to use!

■ Excellent thermal recovery

The integrated nozzle contains both heater and sensor to provide more powerful thermal recovery than conventional tips.

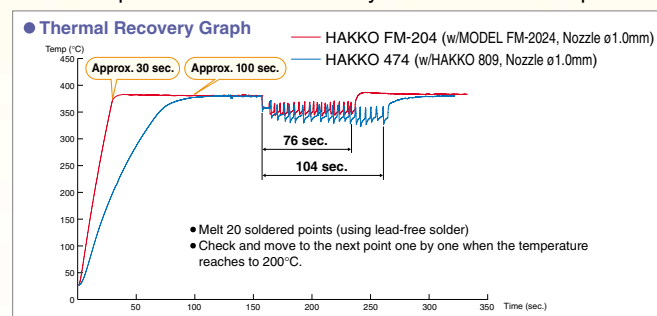

■ Easy maintenance

- Uses disposable paper filter pipes. Allows paper and solder to be disposed of separately.
- Quick nozzle replacement. Nozzle can be replaced safely with the provided nozzle remover.

■ Safe design

Equipped with a nozzle lock function. Inserting a nozzle into the grip automatically locks it in place and prevents the nozzle cartridge from being pulled out suddenly.

■ Sleep function

After the iron is inserted into the iron holder, the sleep function activates after a user-settable time (0 to 29 min.) and the tip temperature will decrease to approximately 200°C.

■ Auto power shut-off function

After 30 minutes have elapsed after inserting the iron into the iron holder, the auto power shut-off function activates and stops to apply power to the heating element.


*It is necessary to change unit settings before using sleep and auto power shut-off functions.

■ Selectable grip

Detachable handle allows two-way use: gun type or straight type.



When the gun grip is attached



Connect the FM-204 station and FH-200 iron holder using a connecting cable.



When the gun grip is detached

Specifications

● HAKKO FM-204

Power Consumption	120W
Temperature Range	200 to 450°C
Temperature Accuracy	±5°C at idle temperature

● Station

Output	24V
Dimensions	160(W) x 120(H) x 225(D)mm
Weight	3.7kg
Vacuum Generator	Vacuum pump, double cylinder type
Vacuum Pressure (Max.)	80kPa (600mmHg)
Suction Flow	15L/min

● MODEL FM-2024 Desoldering Tool

Power Consumption	70W (24V)
Temperature Range	350 to 450°C
Tip to Ground Resistance	< 2Ω
Tip to Ground Potential	< 2mV
Total length (w/o Cord)	180mm with ø1.0 nozzle
Weight (w/o Cord & Hose)	65g with ø1.0 nozzle
Cord	1.2m

*The temperature was measured using the HAKKO FG-101 thermometer.



Packing List


① HAKKO FH-200 iron holder	1
② HAKKO 599 tip cleaner	1
(① + ②: No.FH200-05)	
③ Cleaning drill	1
④ Ceramic paper filter	10
⑤ HAKKO FM-204 station	1
⑥ Control card	1
⑦ Connecting cable	1
⑧ Filter pipe assembly (Originally equipped to the unit, but added one spare as shown in the photo.)	2
⑨ Model FM-2024 desoldering tool	1
⑩ Handle (for gun configuration)	1
⑪ Nozzle remover	1
⑫ Power cord (not shown is the photo)	1

Specifications and design are subject to change without notice.
Copyright Hakko Corporation. All right reserved.

Increase your options

The FM-204 is a desoldering station as standard, but it can be operated with optional FM-2027 and FM-2026 soldering handpieces. A single station plays multiple roles: soldering and desoldering.

Soldering



HAKKO FM-2027

N₂ System




*For further details, refer to the N₂ system brochure.

Replacement and Optional Parts


Part No.	Name/Description
A1514	Ceramic paper filter/10pcs
A1512	Front holder
A1511	Filter pipe assembly
B3253	Connecting cable
FM2027-03*	HAKKO FM-2027 Conversion kit
FM2026-06*	HAKKO FM-2026 Conversion kit

*Iron holder (No.FH200-01) is included.


Replacement Nozzle

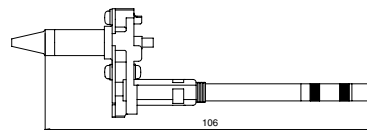


N1-06 Nozzle 0.6mm




N1-08 Nozzle 0.8mm




N1-10 Nozzle 1.0mm




N1-13 Nozzle 1.3mm




N1-16 Nozzle 1.6mm




N1-20 Nozzle 2.0mm



N1-23 Nozzle 2.3mm



N1-L10 Nozzle 1.0mm Long



It's for you
HAKKO
HAKKO CORPORATION
OVERSEAS AFFILIATES

U.S.A.
AMERICAN HAKKO PRODUCTS, INC.
28920 N. AVE. WILLIAMS VALENCIA, CA 91355, U.S.A.
TEL: (661) 294-0090 FAX: (661) 294-0096
Toll Free (800)88-HAKKO
http://www.hakkousa.com

HEAD OFFICE
4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466
http://www.hakko.com E-mail:sales@hakko.com

HONG KONG
HAKKO DEVELOPMENT CO., LTD.
ROOM 1504, EASTERN HARBOUR CENTRE,
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.
TEL: 2811-5588 FAX: 2590-0217
http://www.hakko.com.hk
E-mail:info@hakko.com.hk

SINGAPORE
HAKKO PRODUCTS PTE., LTD.
1, GENTING LINK #02-04, PERFECT INDUSTRIAL
BUILDING, SINGAPORE 349518
TEL: 6748-2277 FAX: 6744-0033
http://www.hakko.com.sg
E-mail:sales@hakko.com.sg

CA00289BbBa002 Dec. 2007

Please access to the following for the other Sales affiliates.
<http://www.hakko.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hakko manufacturer](#):

Other Similar products are found below :

[A1006](#) [FT8002-01](#) [PTG-2T1G0008](#) [HFJ11-1G06ERL](#) [HFJ12-E2450ER-L11RL](#) [TG110-RP55N5LF](#) [B3048](#) [T30-D06](#) [T12-D12](#) [FM203-15](#)
[N1-L10](#) [A1014](#) [N1-20](#) [T12-D24](#) [T12-BCM2](#) [FM2023-04](#) [FT8003](#) [G3-1601](#) [T31-01JS02](#) [T33-BC4](#) [T33-BC5](#) [T33-D24](#) [N50B-05](#) [N50B-06](#)
[950-CK](#) [A1013](#) [A1067](#) [A1187B](#) [A1379](#) [B1309](#) [B1787](#) [C1392B](#) [A1553](#) [A1554](#) [FX300-03](#) [FT300](#) [918-T-1.6D/P](#) [C1148B/P](#) [111-SA](#) [T15-](#)
[1006](#) [T15-1202](#) [N3-23](#) [B5045](#) [B5046](#) [N60-03](#) [N60-05](#) [N60-07](#) [N60-09](#) [T12-1612](#) [C1148B](#)