

CATALOG LISTING
PAGE 1 OF 1
REPLACES

6HM7-30

3 ISSUE

3

CHECK

REVISIONS
A 202107
KED
9 JAN 01
B 203581
GLH
23 JUL 01


CHECK

CHECK


PTC/CAD 2D
DRAWN

TSM 14AUG00

WOBBLEFRAM ACTUATOR SEAL

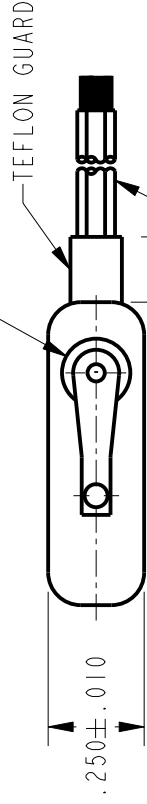

3X NO. 22 WIRE LEAD PER MIL-W-22759/12 MARKED WITH CIRCUIT IDENTIFICATION AND WIRE GAGE (C-22, NO-22, NC-22) PER MIL-W-5088

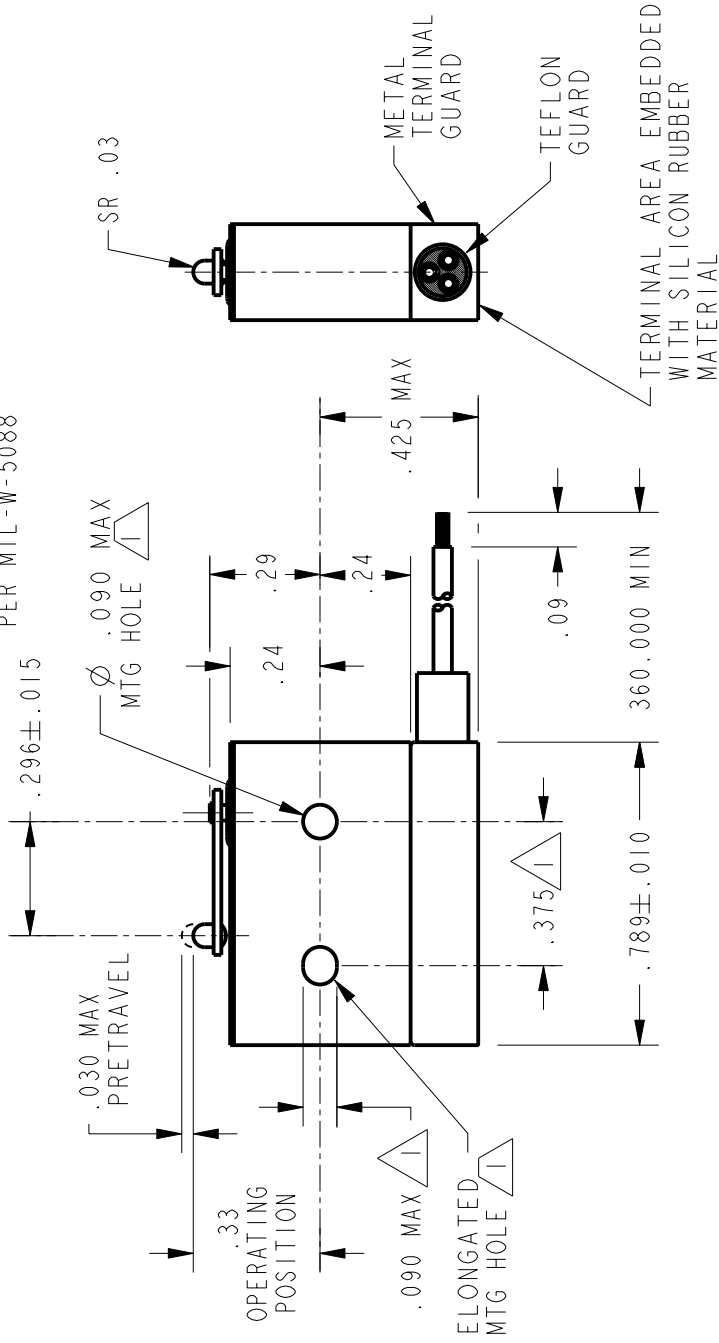

NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.375 \pm .002$ CENTERS
 - 2 - FOR USE IN TEMPERATURE RANGE -85°F TO $+500^{\circ}\text{F}$ (DOWN TO -300°F IF WIRE LEADS ARE NOT FLEXED)
 - 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
 - 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
 - 5 - WEIGHT OF SWITCH ONLY IS 0.22 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.20 OZ MAX PER FOOT
 - 6 - DO NOT APPLY MORE THAN 1 1/2 INCH-LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS		ELECTRICAL DATA		SCALE	DO NOT SCALE PRINT	
OPERATING FORCE	----- 7 OZ MAX	CONTACT ARRANGEMENT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) $\pm .030$	
RELEASE FORCE	----- 1 OZ MIN	S P D T				TWO PLACE (.00) $\pm .015$
DIFFERENTIAL TRAVEL	----- .006 MAX	LINE VOLTAGE	INDUCTIVE LOAD			THREE PLACE (.000) $\pm .005$
OVERTRAVEL	----- .003 MIN	28 VDC	2 AMP	4 AMP	ANGLES	
		115 VAC (400 CYCLE)	2 1/2 AMP	2 1/2 AMP	WEIGHT	
					5	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)