



Item no.: 282-698/281-434
 Product description: 2-CONDUCTOR FUSE TERMINAL BLOCK FORMINI-AUTOMOTIVE BLADE-TYPE FUSES WITH TESTING FACILITY 24 V WITH BLOWN FUSE INDICATION BY LED

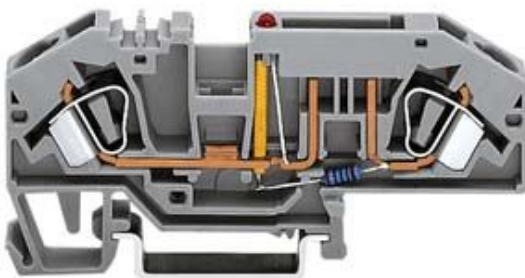

Produkt kann von Bild abweichen / product may differ

Packing unit 25 pieces

RoHS compliant

Product group	1 (Rail Mounted Terminal Blocks)
Power consumption LED	4.8 mA
Cross section [mm ²]	0.2 - 6 mm ²
Cross section [AWG]	24 - 10 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	25 A
Current intensity EN	30 A
Weight	18.14 g
Color	gray
Wiring type	Angled Type
No. of connection Points	2
No. of potentials	2
Height	33.5 mm
Height	1.32 in
Width	8 mm

Width	0.315 in
Depth	85 mm
Depth	3.35 in
Strip length from	12 mm



Strip length to	13 mm
Strip length	0.49 in
Safety information 1	The nominal voltage and nominal current are defined by the indicator lamp or the fuse.
Safety information 2	Blade-type fuses, please note touchproof protection from 42 V
Mounting	TS 35



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
282-698/281-434	UR	E45172	24	30	24-10

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#)