



Description

The Redington Model 720 Electronic Hour Meter offers a large 8 digit LCD display, (9999999.9) 0.32" (8mm) high, with an input operating voltage of 85-500VAC. The front of the unit is totally sealed, and the Hour Meter is housed in a rugged steel enclosure that is interchangeable with the Redington Model 720 Electro Mechanical Hour Meters. The wide operating voltage makes this product ideal for almost any application.

Features

Options

- Operating voltage 85-500VAC
- Rugged steel housing
- Lithium battery
- Quartz accuracy (better than 0.01%)
- Popular 3-hole mounting

- Gasket (721-0004)

Specifications

Display: Large 8 digit LCD (9999999.9), 0.32" [8mm] high
Reset: Non-reset
Voltage: 85-500VAC 50/60Hz
Hour Meter Memory: Self-powered (internal lithium battery)
Termination: Wire leads 6" [152mm]
Mounting: Panel (3-Hole)
Temp. Range:
Operating: -4°F to + 140°F (-20°C to +60°C)
Storage: -40°F to +165°F (-40°C to +75°C)

Humidity: 0 to 95% RH, non-condensing, front totally sealed
Vibration: 10 to 80 Hz, 0.06 double amplitude
Shock: 50G
Dielectric: 1000VAC 50/60Hz for 1 minute
Accuracy: Quartz accuracy (better than 0.01%)
Weight: 5.0 oz (142g)


Models Description

720-6300 85-500VAC, non-reset, 3-hole round, 6" (152mm) wire leads

* Item is normally in factory stock.

Dimensions


720-6300

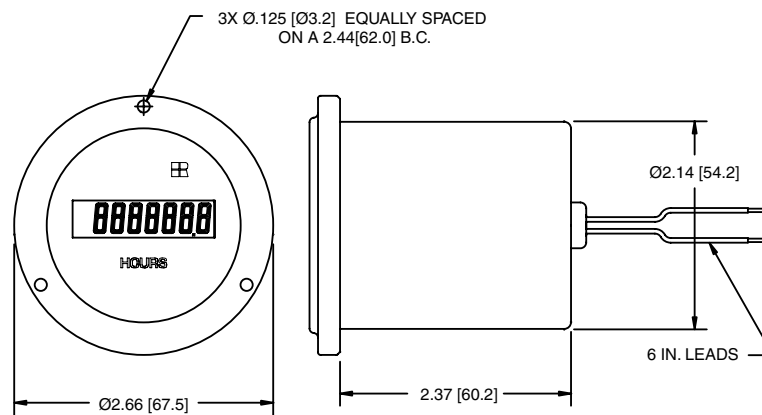

Panel cutout: 2.16" [54.9] Dia.
 Mounting holes: 0.125" [3.2] Dia. on 2.44" [62.0] B.C.

Applications

Control panels




Outdoor Lighting



Industrial Equipment



Compressors



Test equipment



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [redington manufacturer](#):

Other Similar products are found below :

[9415-003](#) [6320-0500-0000](#) [711-0020](#) [6300-1000-0000](#) [711-0180](#) [3400-0010](#) [P8-4904](#) [3410-3000](#) [720-6300](#) [3400-2010](#) [3400-1000](#) [1-4635](#)
[P8-4906](#) [2-1006](#) [P2-4906](#) [6301-2000-0000](#) [6300-2500-0000](#) [3410-1000](#) [6300-0500-0000](#) [6320-2000-0000](#) [711-0160](#) [6300-1500-0000](#) [6320-2500-0000](#) [722-0003](#) [3410-0000](#) [6300-0000-0000](#) [5003-011](#) [3410-2000](#) [722-0001](#)