

# 1550 Standard & 1350 High Inrush Switches 150A to EN61058-1 and 16A 250Vac

With Guard or Cover



- ▶ Standard rocker switch
- ▶ 1350/53 high inrush
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Double pole
- ▶ Option with guard & cover
- ▶ Bezel size 'G' style 32.0 x 25.0



In house test



In house test



## 1550 Series 16(4)A 250Vac T125

UL CSA 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp.  
UL 85°C, file E45221, CSA file LR10990.

10A 24Vdc.

1350 series 16(4)A 250Vac T85 1E4 (10,000 Ops.)  
On request 16(6)A 250Vac T125 5E4 (50,000 Ops.)  
150A Inrush to EN61058-1.

UL CSA 20A 250Vac 1hp, 125Vac 1/2hp.  
UL 72Vdc 7A, 36Vdc 14A.  
UL 85°C, file E45221, CSA file LR10990.

20A 24Vdc

RoHS compliant

3mm contact gap except if marked  $\mu$ .  
Technical data on pages 4 & 5 (switches), 6 (indicators).

rocker switches

**C 1553 A G ---**

TERMINAL    FUNCTION    ROCKER    BODY    PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER																																								
<p><b>C</b></p> <p>6.3 x 0.8</p>	<p>Approvals &amp; ratings vary with function ON OFF Switches - ON when pressed over terminal 1</p> <table border="1"> <tr> <td><b>Standard 1550</b></td> <td><b>High Inrush 1350</b></td> <td>ON - OFF</td> <td></td> </tr> <tr> <td><b>1551</b> <small>HP rating N/A</small></td> <td></td> <td>ON - OFF (momentary ON)</td> <td></td> </tr> <tr> <td><b>1552</b> <small>HP rating N/A</small></td> <td></td> <td>ON - OFF (momentary OFF)</td> <td></td> </tr> <tr> <td><b>1553</b></td> <td><b>1353</b></td> <td>ON - OFF Lit</td> <td></td> </tr> <tr> <td><b>1560 <math>\mu</math></b></td> <td></td> <td>ON - ON</td> <td></td> </tr> <tr> <td><b>1561 <math>\mu</math></b> <small>HP rating N/A</small></td> <td></td> <td>ON - ON (momentary 1 side)</td> <td></td> </tr> <tr> <td><b>1562 <math>\mu</math></b> <small>In house tests only</small></td> <td></td> <td>2 Circuit ON - ON</td> <td></td> </tr> <tr> <td><b>1570 <math>\mu</math></b> <small>125V &amp; 250V 1/2 HP H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON</td> <td></td> </tr> <tr> <td><b>1571 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON (momentary 1 side)</td> <td></td> </tr> <tr> <td><b>1572 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON (momentary 2 sides)</td> <td></td> </tr> </table>	<b>Standard 1550</b>	<b>High Inrush 1350</b>	ON - OFF		<b>1551</b> <small>HP rating N/A</small>		ON - OFF (momentary ON)		<b>1552</b> <small>HP rating N/A</small>		ON - OFF (momentary OFF)		<b>1553</b>	<b>1353</b>	ON - OFF Lit		<b>1560 <math>\mu</math></b>		ON - ON		<b>1561 <math>\mu</math></b> <small>HP rating N/A</small>		ON - ON (momentary 1 side)		<b>1562 <math>\mu</math></b> <small>In house tests only</small>		2 Circuit ON - ON		<b>1570 <math>\mu</math></b> <small>125V &amp; 250V 1/2 HP H terminal rated T100 only</small>		ON - OFF - ON		<b>1571 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small>		ON - OFF - ON (momentary 1 side)		<b>1572 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small>		ON - OFF - ON (momentary 2 sides)		<p><b>A</b> Softline Matt</p> <p>Lit (not momentary)</p> <p><b>V</b> Curved</p> <p>Matt or gloss      Gloss only Lit (not momentary)</p> <p><b>P</b> Lit window Matt</p> <p>Lit (not momentary)</p>
<b>Standard 1550</b>		<b>High Inrush 1350</b>	ON - OFF																																							
<b>1551</b> <small>HP rating N/A</small>			ON - OFF (momentary ON)																																							
<b>1552</b> <small>HP rating N/A</small>			ON - OFF (momentary OFF)																																							
<b>1553</b>		<b>1353</b>	ON - OFF Lit																																							
<b>1560 <math>\mu</math></b>			ON - ON																																							
<b>1561 <math>\mu</math></b> <small>HP rating N/A</small>			ON - ON (momentary 1 side)																																							
<b>1562 <math>\mu</math></b> <small>In house tests only</small>			2 Circuit ON - ON																																							
<b>1570 <math>\mu</math></b> <small>125V &amp; 250V 1/2 HP H terminal rated T100 only</small>			ON - OFF - ON																																							
<b>1571 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small>			ON - OFF - ON (momentary 1 side)																																							
<b>1572 <math>\mu</math></b> <small>HP rating N/A H terminal rated T100 only</small>			ON - OFF - ON (momentary 2 sides)																																							
<p><b>H</b></p> <p>4.8 x 0.8*</p>																																										
<p><b>K</b></p> <p>2.8 x 0.8*</p>																																										
<p><b>T</b></p> <p>Solder</p>																																										
<p><b>U</b></p> <p>Right angle T Solder (Not DP)</p>																																										
<p><b>X</b></p> <p>PCB 0.8Sq*</p> <p><small>*Contact sales for details on 1350 series</small></p>																																										





C1550AH ---



C1553AH ---

**BODY**

Panel cut-out \* Bezel  
Cut-outs must be punched in the direction of insertion

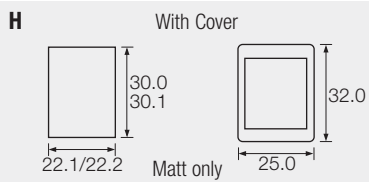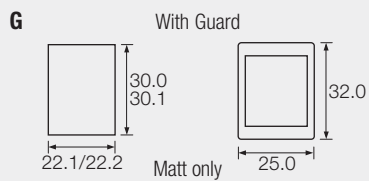

**OPTIONS**

**Finish** Matt is standard.


**Colour** Call sales for custom colours. A full range is available for large orders.

**Legend printing** Select from the examples or call sales for custom legends.

**Lamp voltage** Call sales for details.

For all options call sales.

**DIMENSIONS (mm)**




Terminal spacing - Poles 10.2 between centres

**Panel thickness**  
**G, H** 0.75 to 2.5mm

\* For cut-out details on momentary switches call sales.

**1350 High inrush, positive break switching**

The 1350 series mechanism ensures contact welds formed at switch-on, are positively separated by the plunger tube acting directly on the step in the moving contact.



**Examples of printing**



EN602A



EN730



EN822

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rocker Switches](#) category:*

*Click to view products by [Arcoelectric](#) manufacturer:*

Other Similar products are found below :

[VKD2GHNB-00000-000](#) [VSD2GNNB-00000-000](#) [6-1571986-5](#) [6-1571986-9](#) [632422-4B-KD](#) [7036WWCDBX653+U622](#) [8055K52Z7V](#)  
[8138K20E6M50](#) [FMC18A2200002](#) [84206L](#) [84312LX](#) [PREDD4-07F-BB0FW](#) [PREDD5-07F-BB0GW](#) [PRFDD1-16F-BB000](#) [PRFDD3-16F-](#)  
[BB000](#) [1-1634201-0](#) [999-16702-001](#) [A101J2ZQ004](#) [A101J4ZQ004](#) [A101J51CB0004](#) [A107J51ZQ0004](#) [A201J1AQ004](#) [A201J1AV2Q004](#)  
[A201J3ZB004](#) [A201J50ZQ004](#) [A203J51ZQ0004](#) [A226L11YZQ](#) [A22L11A](#) [A435S1YZQ](#) [H8500XBBBBL-A](#) [H8653VBBG2577W](#)  
[HB130CHNWWNAAC](#) [1251.0303](#) [AE205J60V3B004](#) [RH110C2NBB](#) [1352.0107](#) [1363.0201](#) [AML25GBF2AA03GR](#) [1571099-3](#) [1571987-4](#)  
[1571987-5](#) [1571989-7](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1801.1164](#) [1831.1102](#) [1833.3402](#) [1837.1118](#)