

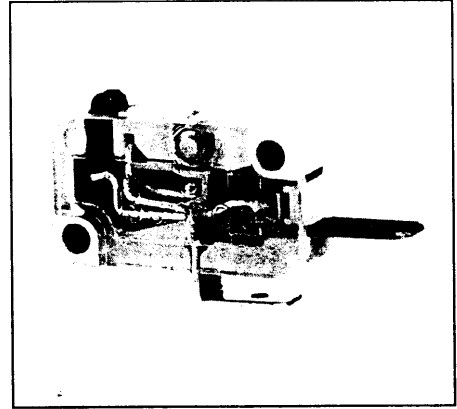


3189685.

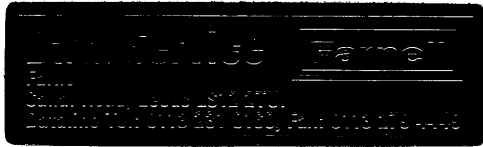

Positive Action Switch BVM3-Series

BVM3F

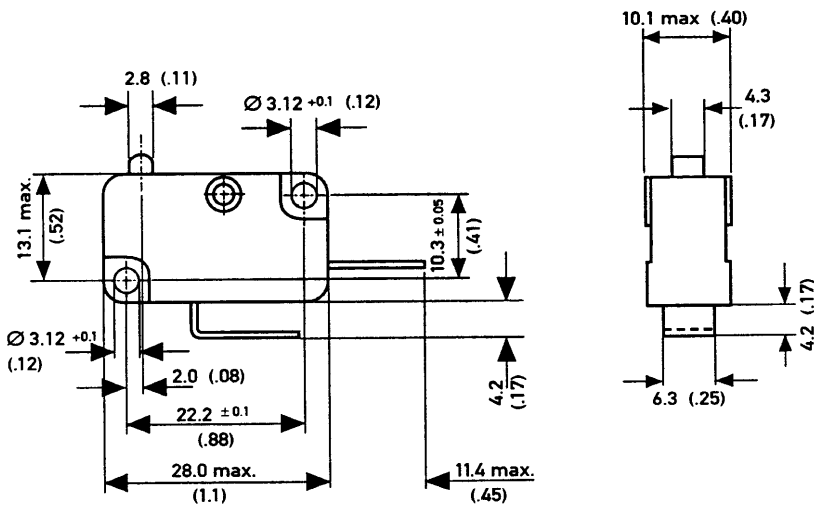


BVM3 Series

Miniature safety interlock switch for use in domestic and industrial applications where there is a clean, dry environment. The mounting holes on the switches comply with the required international standard for miniature switches which makes them ideal replacements for snap-action switches in applications requiring positive action switching.

All models feature a contact gap of > 3 mm at full travel.

BVM3FY

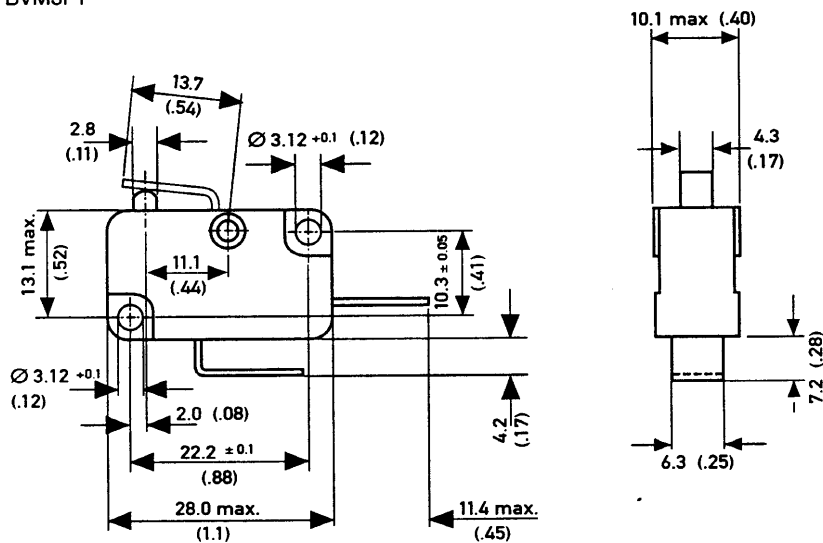

Specifications

BVM3

Housing:
Glass fibre reinforced Polyamide (PA 6.6)

Plunger:
Polyamide (PA 6.6)

Lid:
Polycarbonate (PC)

Mechanism:
Single break positive action
> 3 mm contact gap

Contacts:
Fixed – fine silver
Moving – Silver cadmium oxide

Terminals:
6.3 mm (0.25 in) faston

Temperature Range:
-10°C to +85°C

Mechanical life:
10⁶ cycles minimum

Type of protection:
IP40


Mounting:
Side mounting

Actuators:
Stainless steel lever
Polyamide (PA 6.6) roller

Approvals:
CSA, UL




Recom. maximum Elec. Ratings BVM3		
Voltage	Resistive load	
VAC	A	
max.		
250	10	

Circuit diagram BVM3



**Product Range
Operating Characteristics**


BVM3

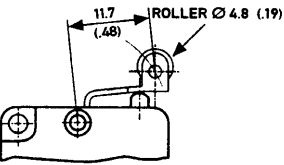Actuator	Reference	Actuating Force at Contact Max. N (ozf)	Force at total Travel Maximum N (ozf)	Free Position Maximum mm (in)	Minimum gap at total Travel mm (in)	Over Travel
Plunger 	BVM3F	4.5 (16.2)	4.8 (17.3)	15.8 (0.62)	3.0 (0.12)	Depress to case
Y-Lever 	BVM3FY	4.5 (16.2)	4.8 (17.3)	16.8 (0.66)	3.0 (0.12)	
YR-Lever 	BVM3FYR	5.0 (18.0)	5.5 (19.8)	22.35 (0.88)	3.0 (0.12)	

Operating characteristics are specified from the mounting holes.

Ordering References

BVM3

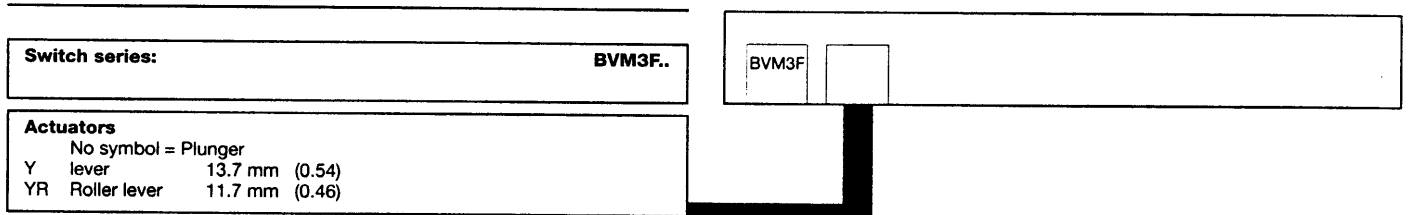

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Saia-Burgess](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)